




CD-2343 SERIES

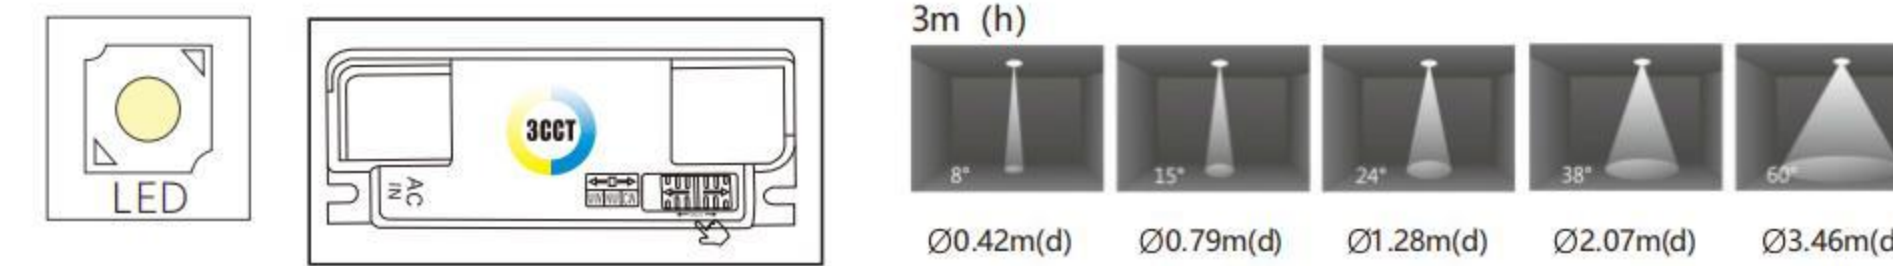

3000K

h(m)	E(lx)	D(m)
1	672	2.94
2	168	5.89
3	75	8.83
4	42	11.78
5	27	14.72

85-265V 50-60Hz	UGR≤6	LED	50000H Long Life
IP20	IP20	IP20	IP20
3CCT	3000K Ra≥80	4000K Ra≥80	6500K Ra≥80
OSRAM	SAN AN	CREE	BRIDGELUX
	WH	BK	
SHINE WH	SHINE BK	MATT WH	MATT BK
UV BK	UV SL	UV GD	UV RSGD

CD-2343

TECHNICAL SPECIFICATIONS

Product Name :	SMD Downlight
Model no:	CD-2343
Power :	5W/10W/12W/15W/18W/24W/30W/ 48W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	SMD2835
Lumen :	80-110 LM/W
Colour Temperature :	3000K - 6500K/CCT
Colour Rendering Index :	CRI>80
Beam angle :	105°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Die-casting Aluminium
Optical material:	Reflective cup+PS Diffuser
Lighning protection :	1.5-4KV
Protection class :	Ip20

