






**CDS202**

**TECHNICAL SPECIFICATIONS**

|                          |                         |
|--------------------------|-------------------------|
| Product Name :           | COB Downlight           |
| Model no:                | CDS202                  |
| Power :                  | 12W/18W/30W/40W/48W/60W |
| Input :                  | AC85-265V , 50 /60 HZ   |
| Temperature range :      | -20-50°C                |
| Light source :           | COB                     |
| Lumen :                  | 80-110 LM/W             |
| Colour Temperture :      | 3000K - 6500K/CCT       |
| Colour Rendering Index : | CRI>80                  |
| Beam angle :             | 12°/24°/38°/60°         |
| Power factor :           | Pf>0.5 / Pf>0.9         |
| Power efficiency :       | 92%                     |
| Housing material :       | Die-casting Aluminium   |
| Optical material:        | Reflective cup+Lens     |
| Lighning protection :    | 1.5-4KV                 |
| Protection class :       | Ip20                    |



CDS202 SERIES

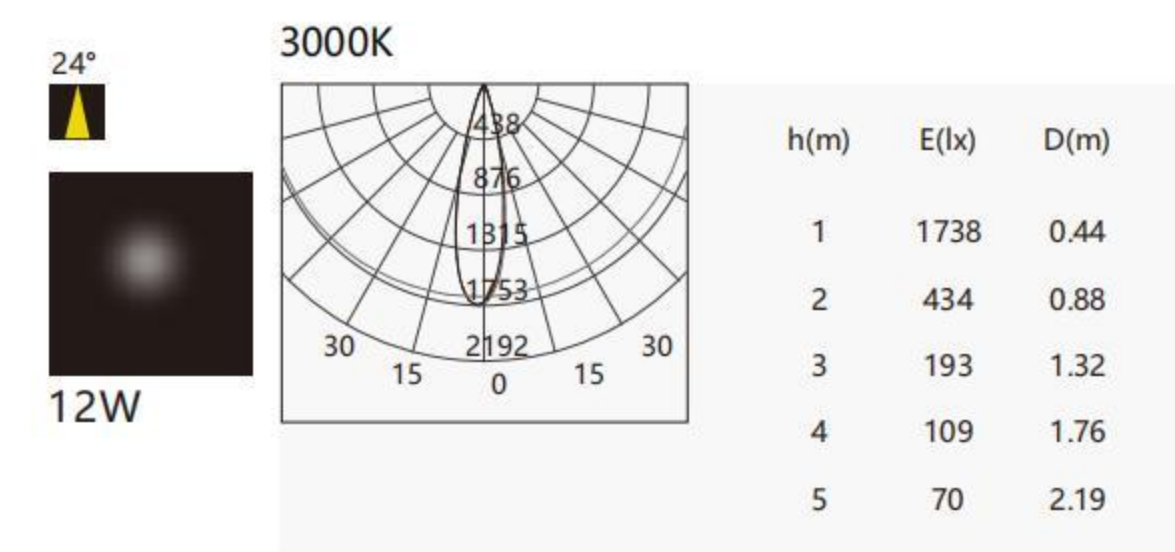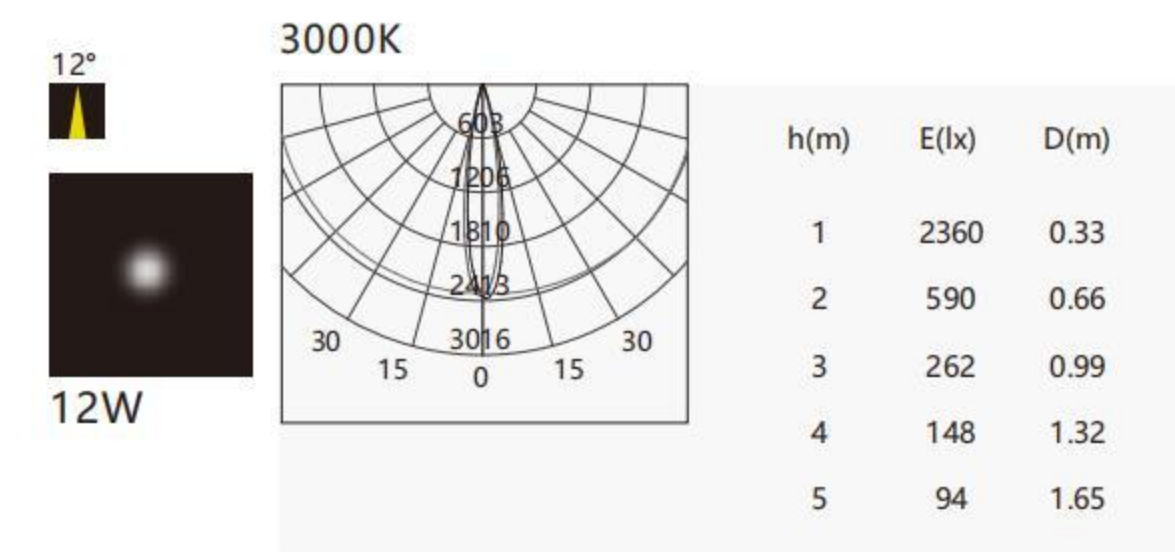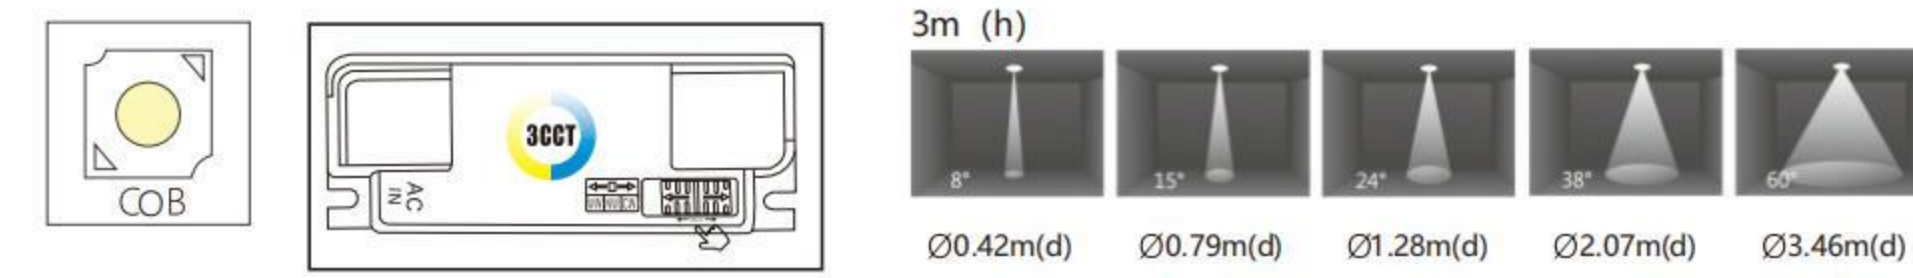

|                    |                |                |                     |
|--------------------|----------------|----------------|---------------------|
| 85-265V<br>50-60Hz | UGR≤6          | LED            | 50000H<br>Long Life |
| IP20               | IP20           | IP20           | IP20                |
| 3CCT               | 3000K<br>Ra≥80 | 4000K<br>Ra≥80 | 6500K<br>Ra≥80      |
| OSRAM              | SAN AN         | CREE           | BRIDGELUX           |
|                    | WH             | BK             |                     |
| SHINE WH           | SHINE BK       | MATT BK        | MATT SL             |
| UV BK              | UV SL          | UV GD          | UV RSGD             |

