




JX-MZ-RD JX-MZ-SQ SERIES










110°
16W

3000K

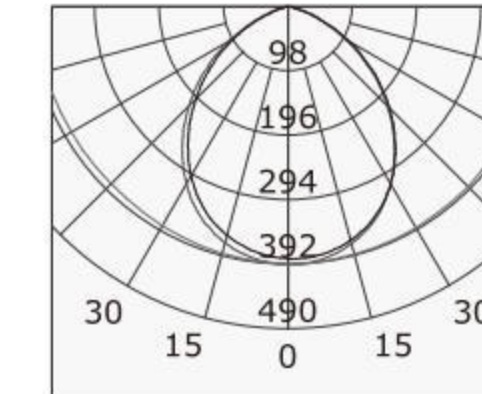

h(m)	E(lx)	D(m)
1	392	2.18
2	98	4.36
3	44	6.54
4	25	8.72
5	16	10.90

85-265V 50-60Hz	UGR<10	LED	50000H Long Life
IP20	3000K Ra>80	4000K Ra>80	6500K Ra>80

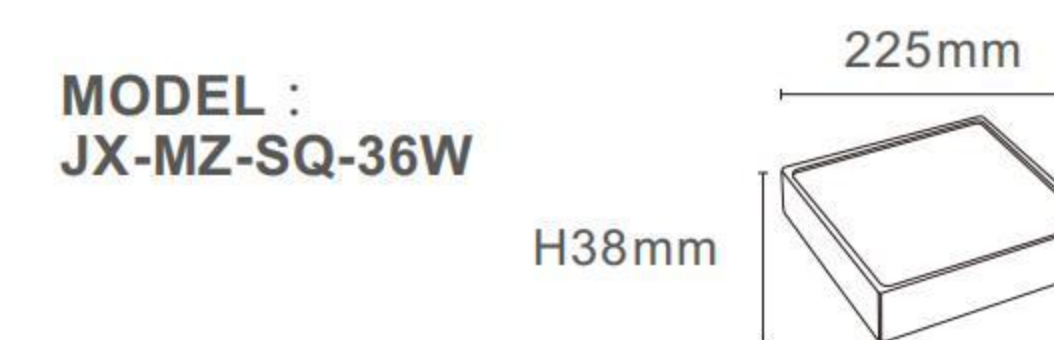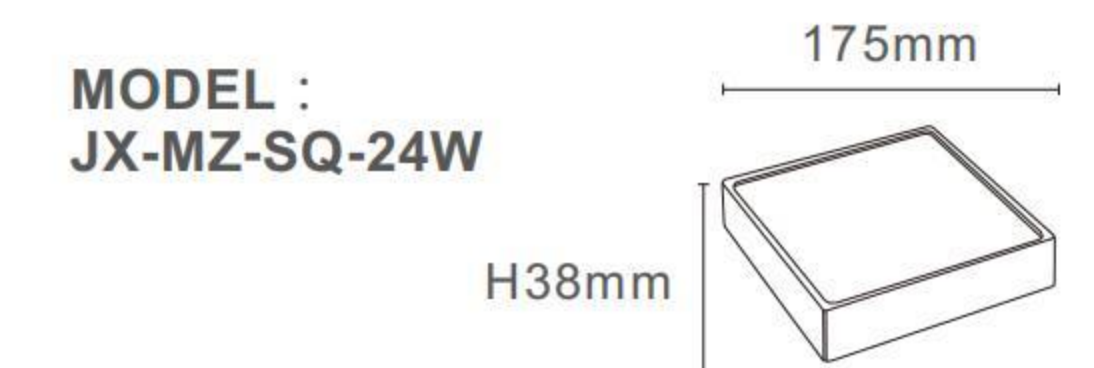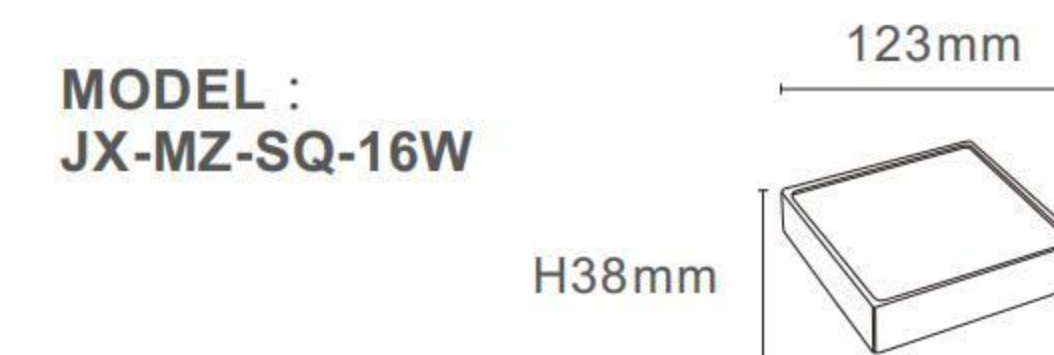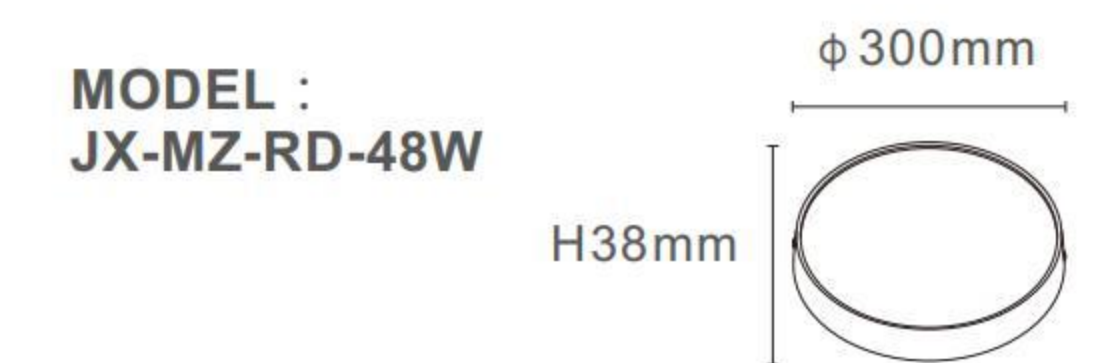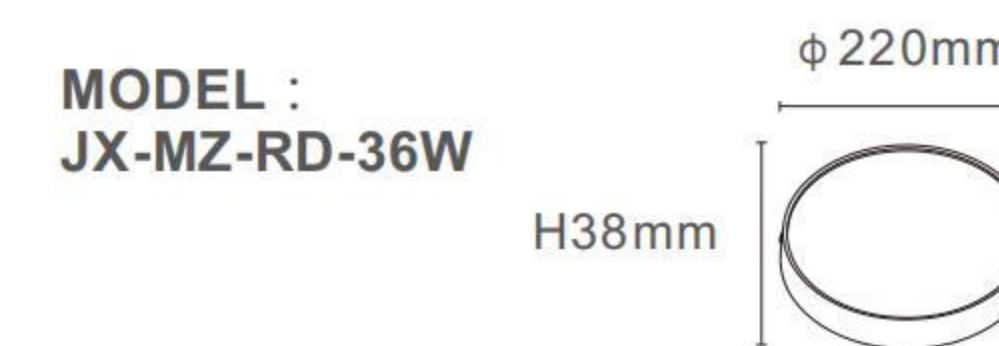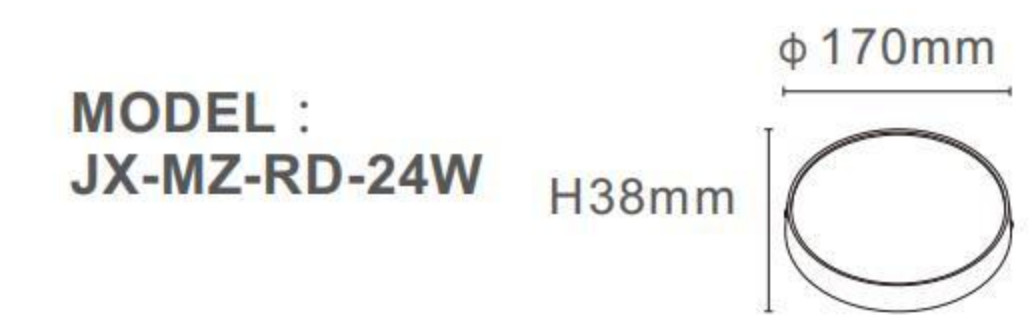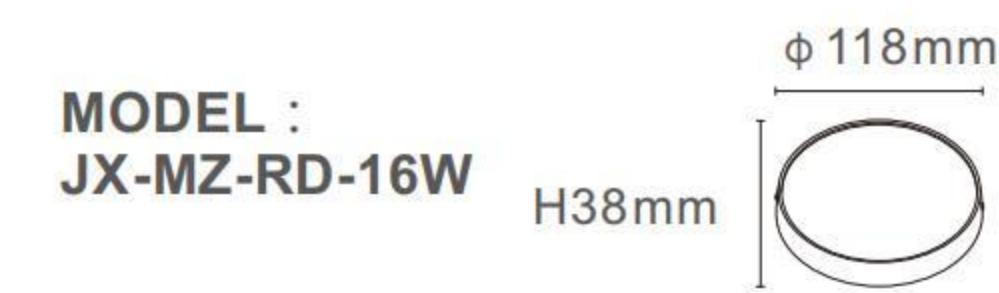

JX-MZ-RD

JX-MZ-SQ




TECHNICAL SPECIFICATIONS


Product Name :	SMD Downlight
Model no:	JX-MZ-RD/JX-MZ-SQ
Power :	16W/24W/36W/48W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	LED SMD2835
Lumen :	80LM/W
Colour Temperature :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	110°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Die casting Aluminium
Diffuser :	PC
Lighning protection :	1.5-4KV
Protection class :	Ip20




JX-MZ-RD JX-MZ-SQ SERIES



3000K






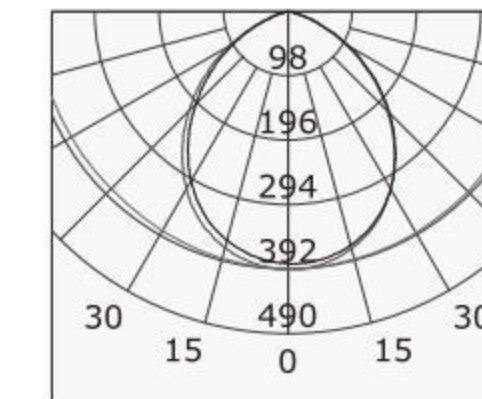


h(m)	E(lx)	D(m)
1	392	2.18
2	98	4.36
3	44	6.54
4	25	8.72
5	16	10.90

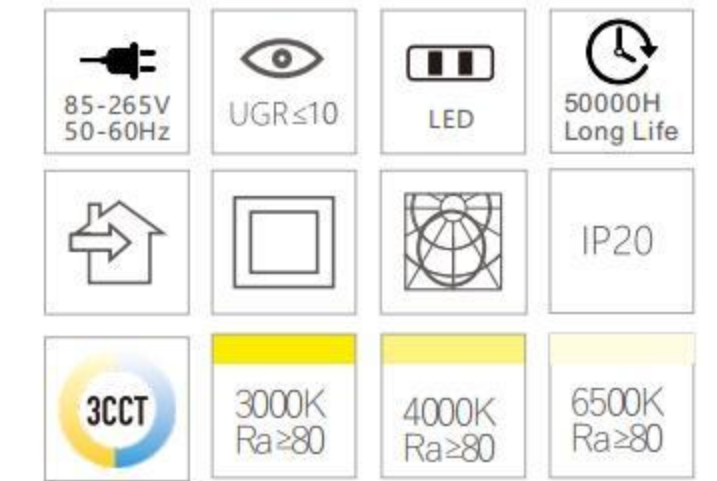

JX-MZ-RD

JX-MZ-SQ

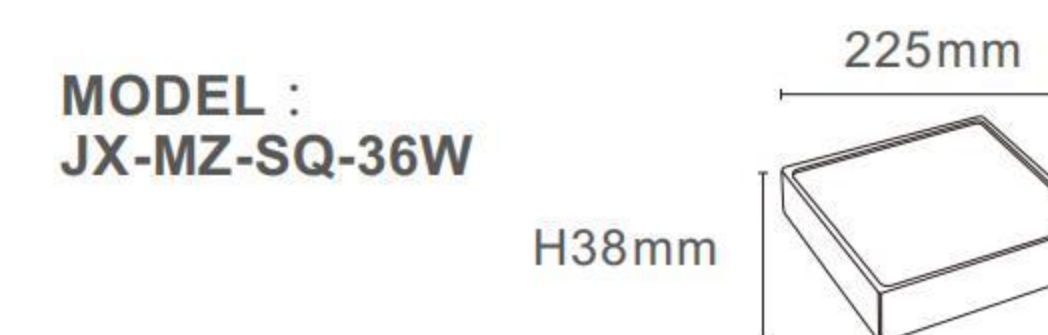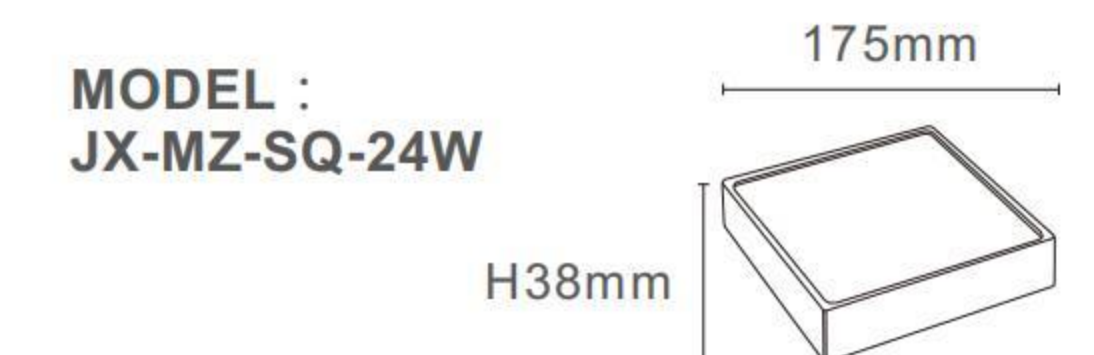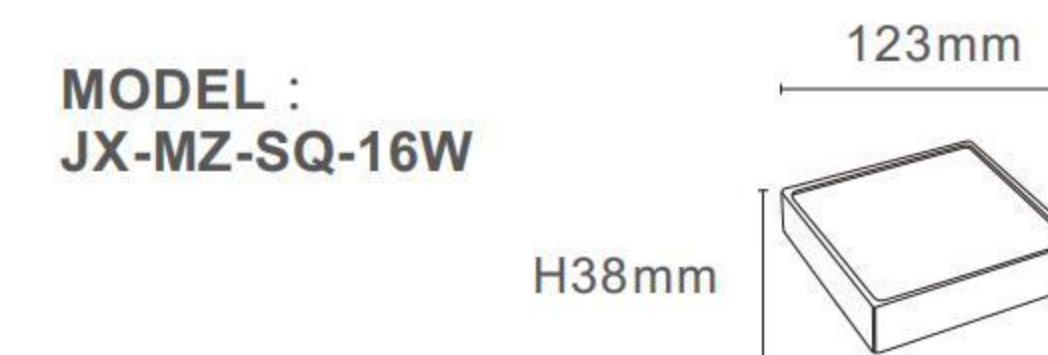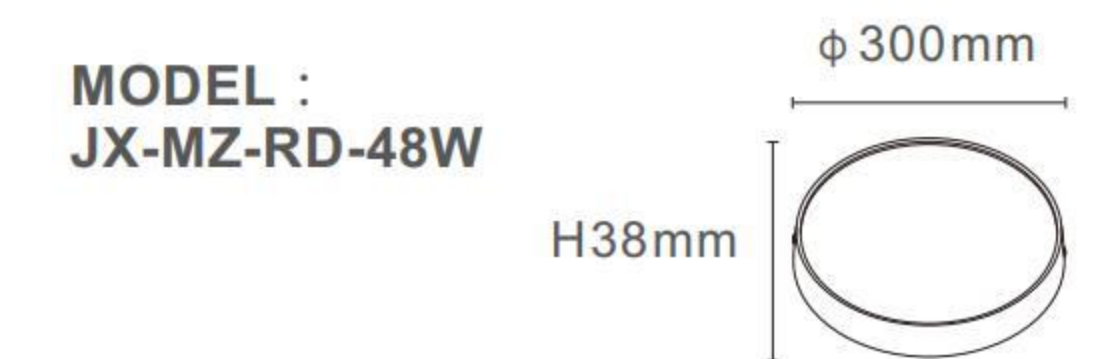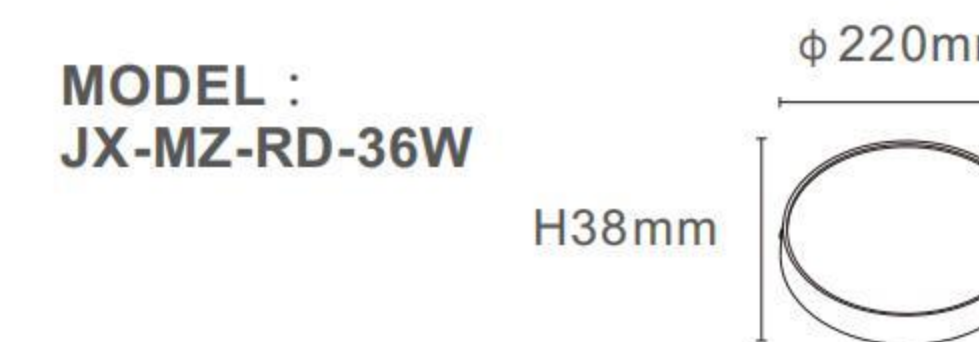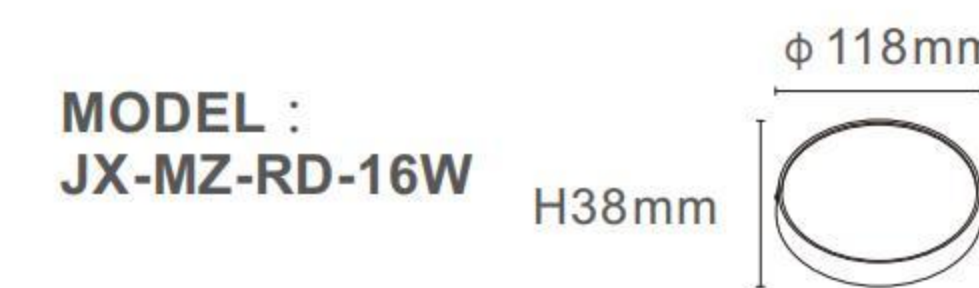

TECHNICAL SPECIFICATIONS

Product Name :	SMD Downlight
Model no:	JX-MZ-RD/JX-MZ-SQ
Power :	16W/24W/36W/48W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	LED SMD2835
Lumen :	80LM/W
Colour Temperature :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	110°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Die casting Aluminium
Diffuser :	PC
Lighning protection :	1.5-4KV
Protection class :	Ip20