

RD-YL06


RD-YL09

TECHNICAL SPECIFICATIONS


Product Name :	Slim Panel Light
Model no:	RD-YL06/YL09
Power :	3W/6W/9W/12W/15W/18W/24W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	LED SMD2835
Lumen :	80LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	110°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Die casting Aluminium
Diffuser :	PP+glass & PS+PS
Lighning protection :	1.5-4KV
Protection class :	Ip20




YL06/YL09 SERIES




3000K




h(m)	E(lx)	D(m)
1	392	2.18
2	98	4.36
3	44	6.54
4	25	8.72
5	16	10.90

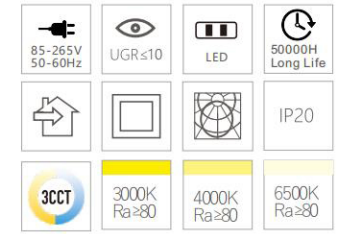


MODEL : RD-3W




MODEL : RD-6W




MODEL : RD-9W




MODEL : RD-12W

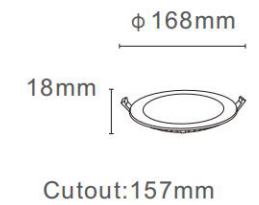


MODEL : RD-15W




MODEL : RD-18W

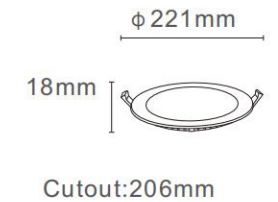

MODEL : RD-24W



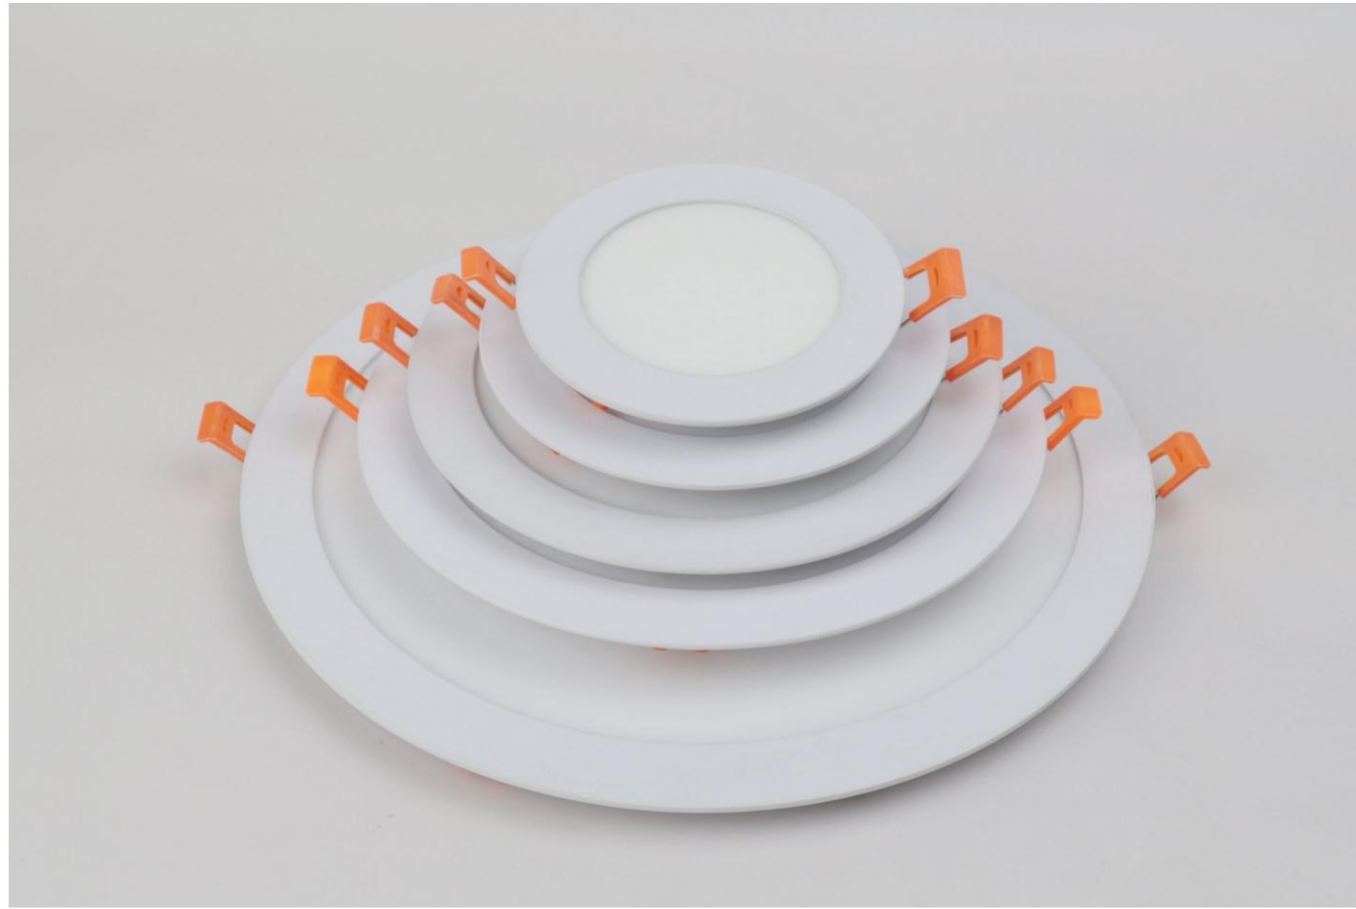


SQ-YL06 **SQ-YL09**

TECHNICAL SPECIFICATIONS


Product Name :	Slim Panel Light
Model no:	SQ-YL06/YL09
Power :	3W/6W/9W/12W/15W/18W/24W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	LED SMD2835
Lumen :	80LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	110°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Die casting Aluminium
Diffuser :	PP+glass & PS+PS
Lighning protection :	1.5-4KV
Protection class :	Ip20



YL06/YL09 SERIES




3000K




h(m)	E(lx)	D(m)
1	392	2.18
2	98	4.36
3	44	6.54
4	25	8.72
5	16	10.90




MODEL : SQ-3W




MODEL : SQ-6W




MODEL : SQ-9W




MODEL : SQ-12W

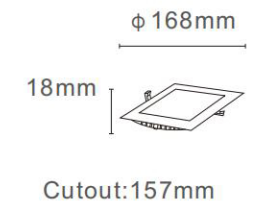

MODEL : SQ-15W



MODEL : SQ-18W

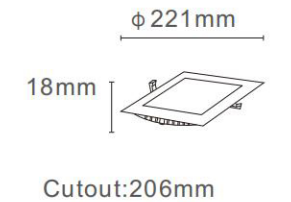

MODEL : SQ-24W

