



MG-DB




MG-DB SERIES



24°				36°			
h(m)	Ea(lx)	D(cm)	h(m)	Ea(lx)	D(cm)		
1	1983	38.03	1	810.5	53.84		
2	495.7	76.06	2	202.6	107.68		
3	220.3	114.09	3	90.06	161.53		
4	123.9	152.12	4	50.66	215.37		
5	79.31	190.15	5	32.42	269.21		

24°				36°			
h(m)	Ea(lx)	D(cm)	h(m)	Ea(lx)	D(cm)		
1	3114	49.76	1	6086	47.49		
2	778.6	99.52	2	1522	94.98		
3	346.0	149.29	3	676.2	142.46		
4	194.6	199.05	4	380.4	189.95		
5	124.6	248.81	5	243.4	237.44		

DC 48V	3000K Ra>90	ON/OFF	BK
	4000K Ra>90	0-10V Optional	WH
	6500K Ra>90	0-220V Optional	IP20
	UGR<6		
OSRAM	SAN AN	CREE	BRIDGELUX

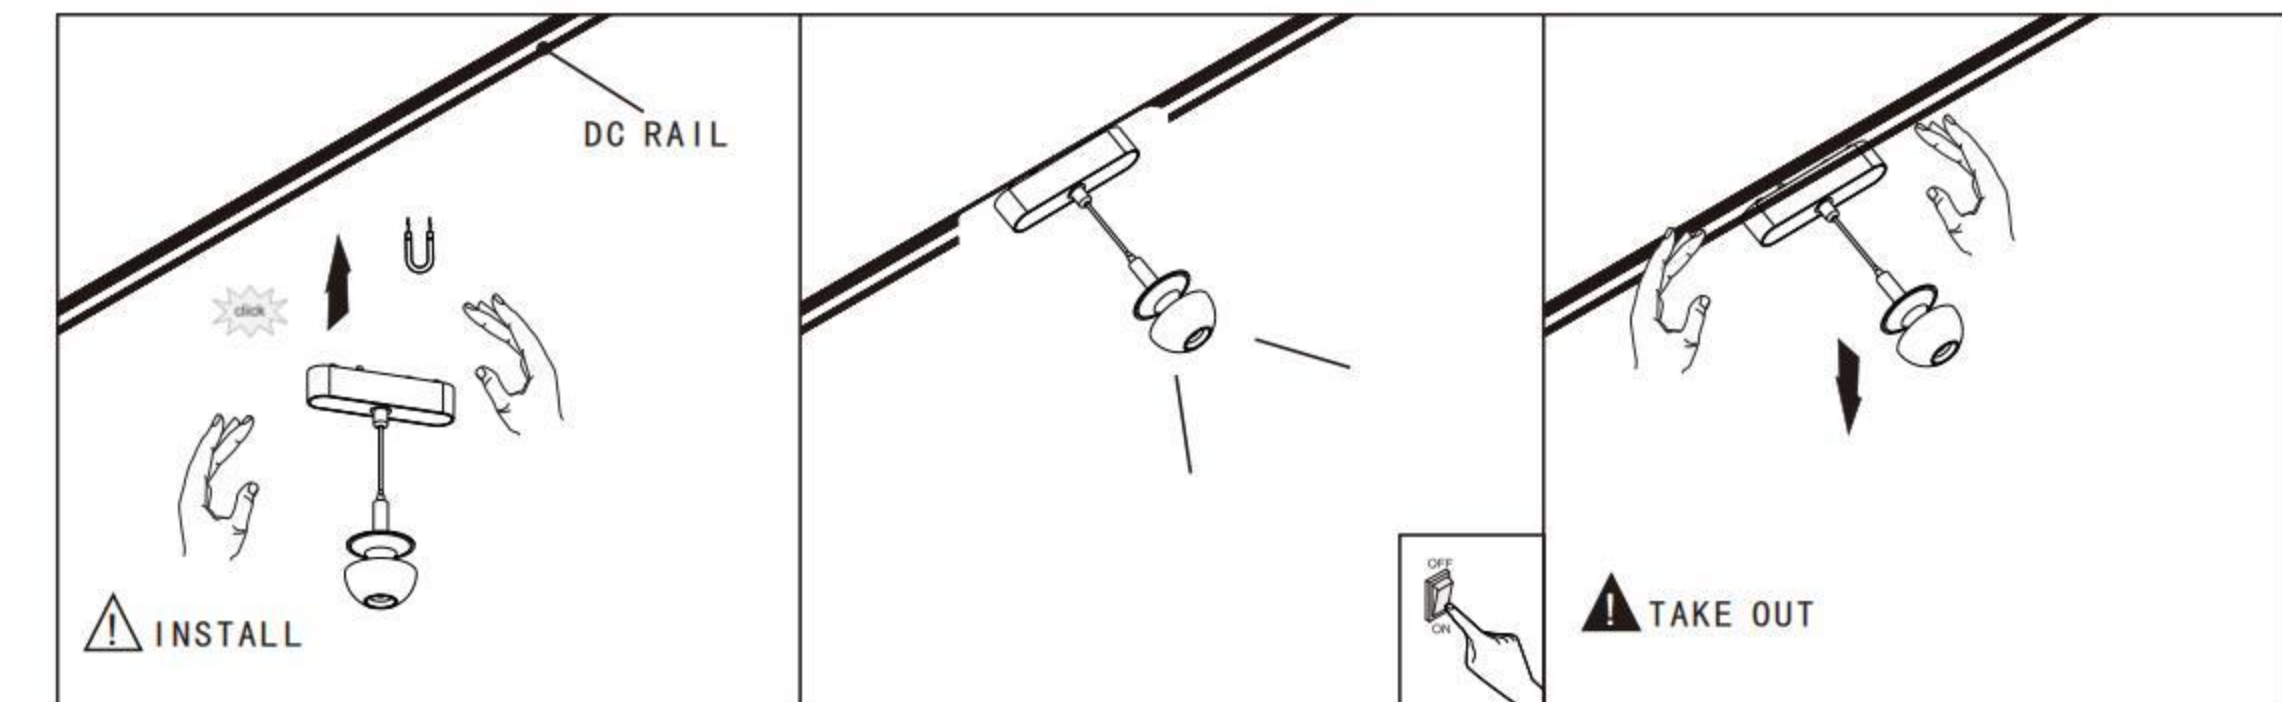

TECHNICAL SPECIFICATIONS

Model No:	MG-DB
Power :	7W
Colour Temperature :	3000K/4000K/6500K
Colour Rendering Index :	CRI>90
Housing material :	Alumium + PC
Input parameter :	DC48V
Light source type :	COB

MODEL : MG-DB-7W

