





MG-DE



MG-DE SERIES

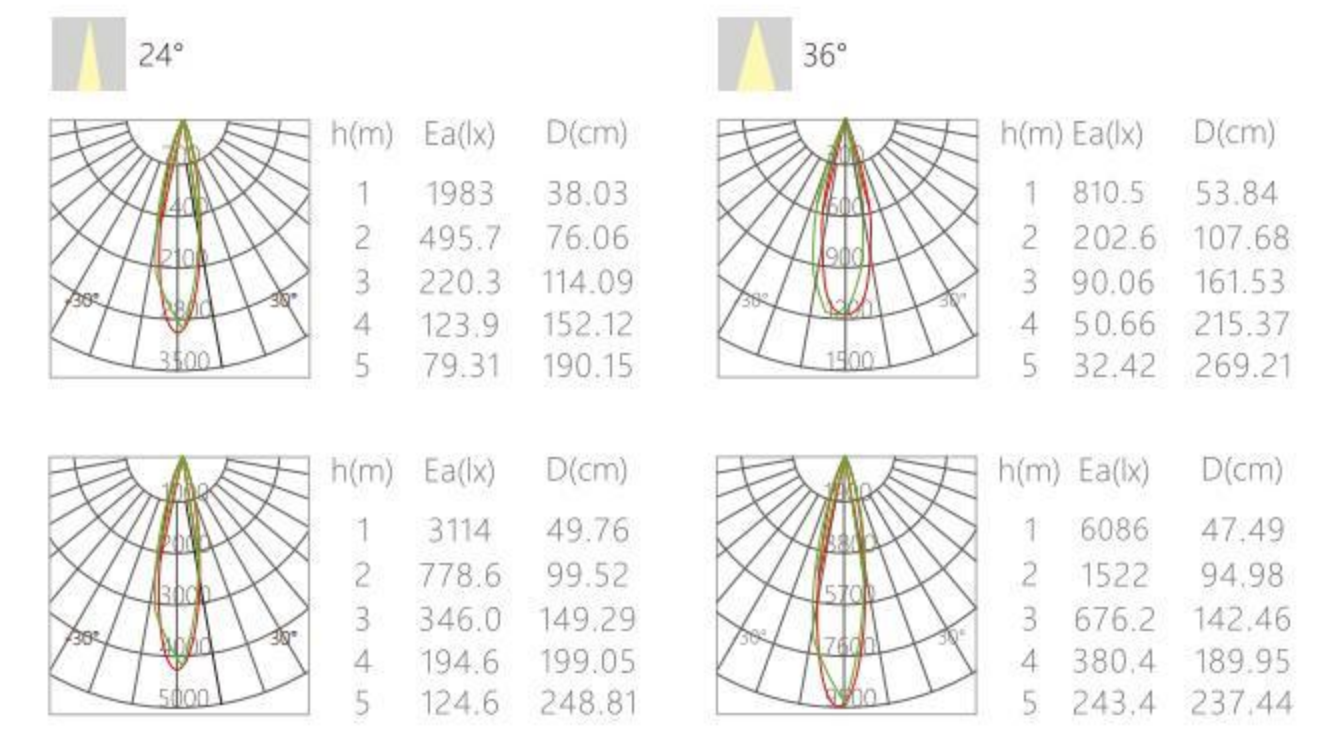

DC 48V	3000K Ra>90	ON/OFF	BK
	4000K Ra>90	0-10V Optional	WH
	6500K Ra>90	0-220V Optional	IP20
	UGR<6		
OSRAM	SAN AN	CREE	BRIDGELUX

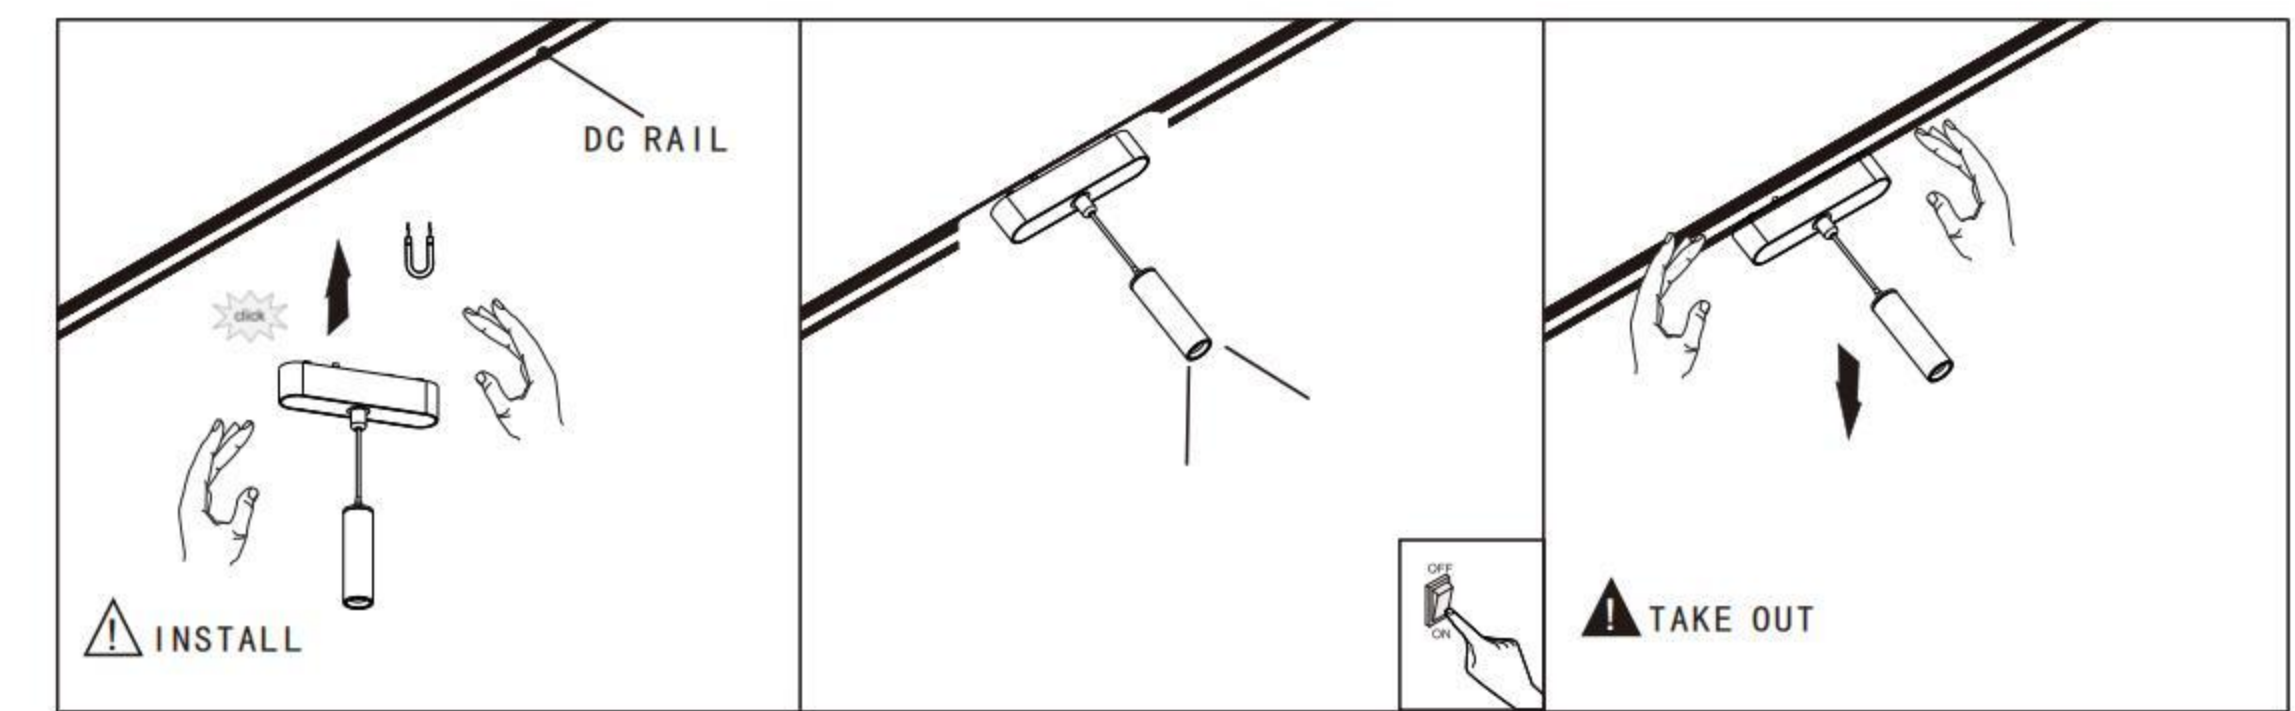

TECHNICAL SPECIFICATIONS

Model No:	MG-DE
Power :	5W
Colour Temperature :	3000K/4000K/6500K
Colour Rendering Index :	CRI>90
Housing material :	Alumium + PC
Input parameter :	DC48V
Light source type :	COB

MODEL : MG-DE-5W

