


**UTR-FL**




UTR-FL SERIES

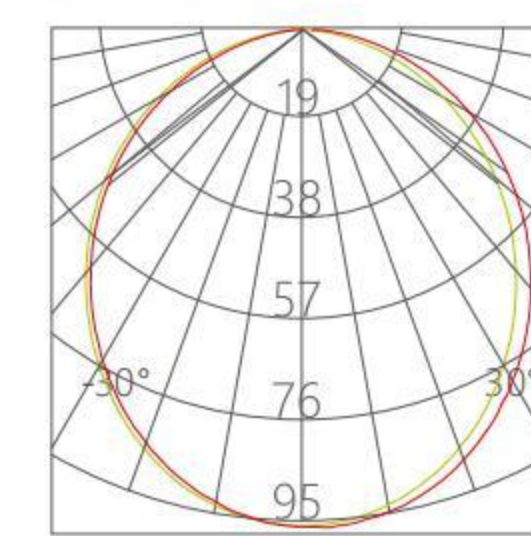


h(m)	Ea(lx)	D(cm)
1	31.35	258.03
2	7.838	516.05
3	3.483	774.08
4	1.959	1032.11
5	1.254	1290.14

DC 48V	3000K Ra>90	ON/OFF	BK
	4000K Ra>90	0-10V Optional	WH
	6500K Ra>90	0-220V Optional	IP20
	UGR<6		
OSRAM	SAN AN	CREE	BRIDGELUX

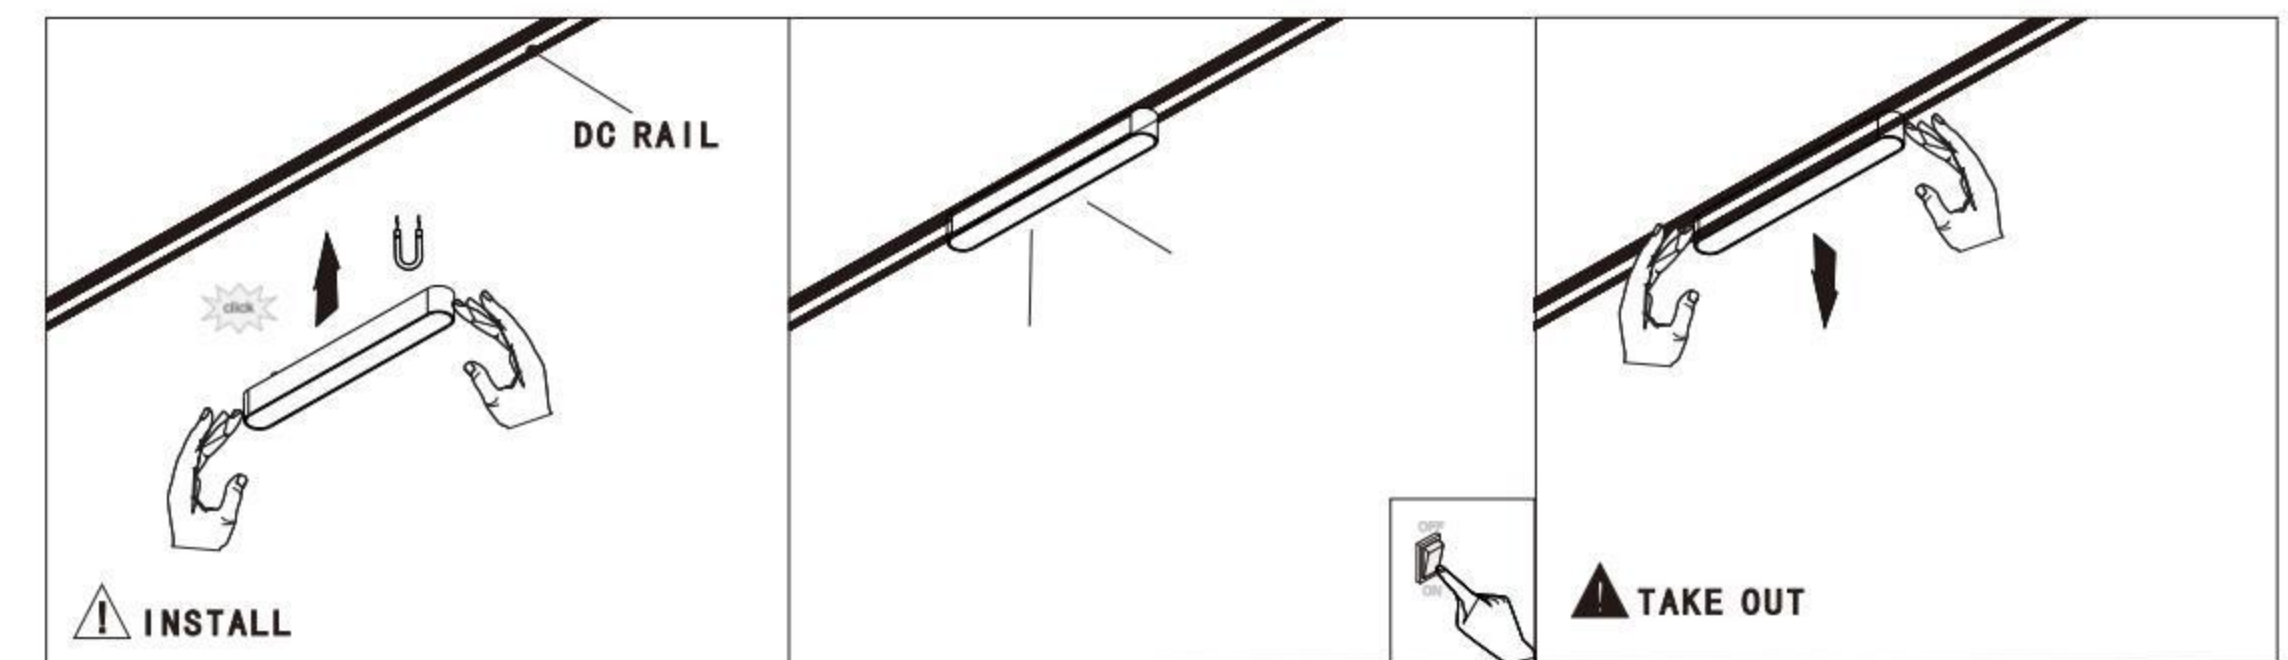

**TECHNICAL SPECIFICATIONS**

<b>Model No:</b>	UTR-FL
<b>Power :</b>	6W/12W/18W
<b>Colour Temperature :</b>	3000K/4000K/6500K
<b>Colour Rendering Index :</b>	CRI>80
<b>Housing material :</b>	Alumium + PC
<b>Input parameter :</b>	DC48V
<b>Light source type :</b>	SMD

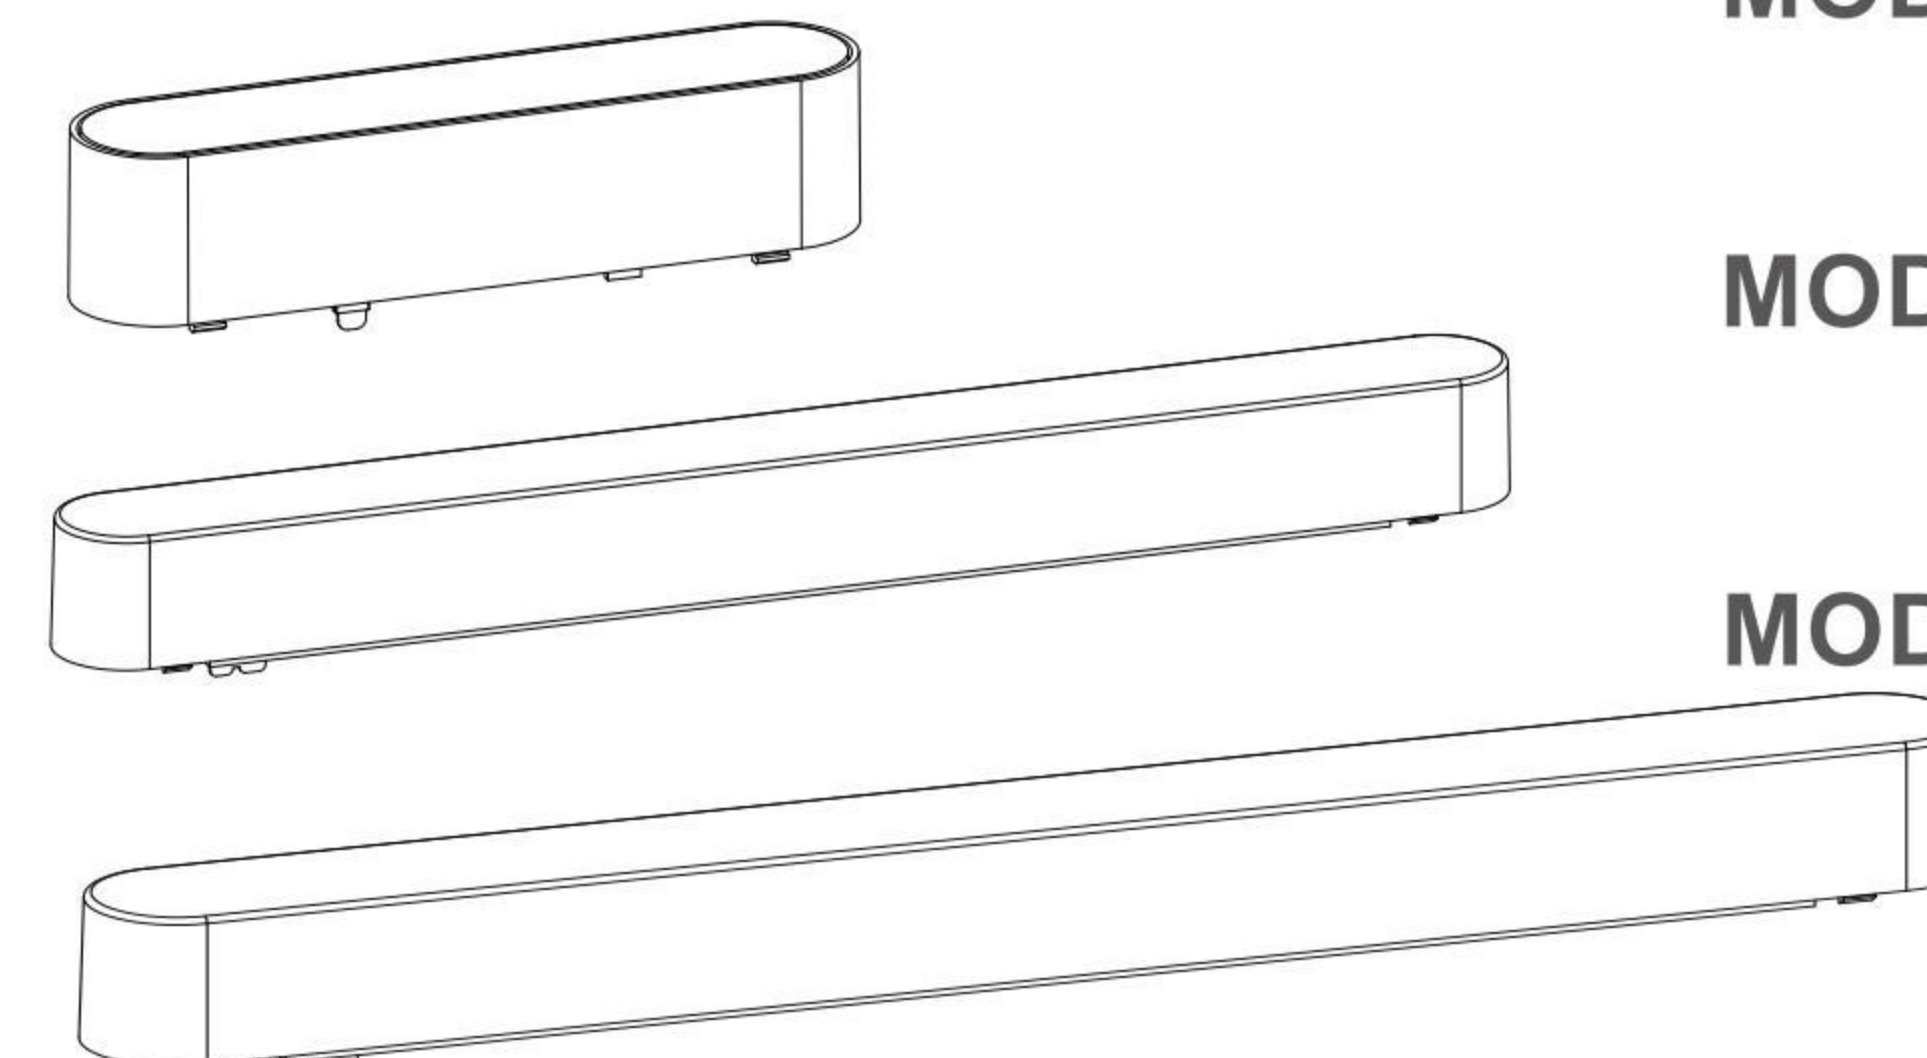

**MODEL :UTR-FL:6W**  
L:120 W:26 H:26

**MODEL :UTR-FL:12W**  
L:235 W:26 H:26

**MODEL :UTR-FL:18W**  
L:450 W:26 H:26