


UTR-GS




UTR-GS SERIES




6W

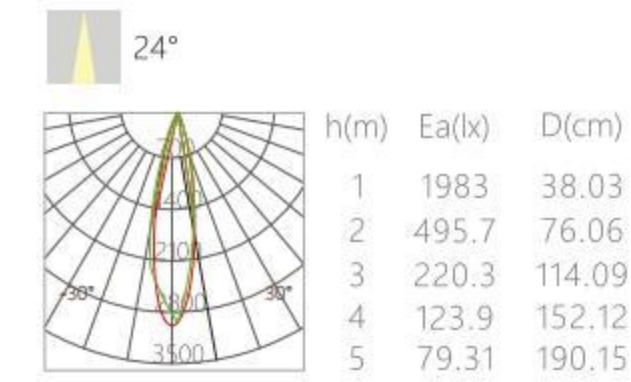

12W

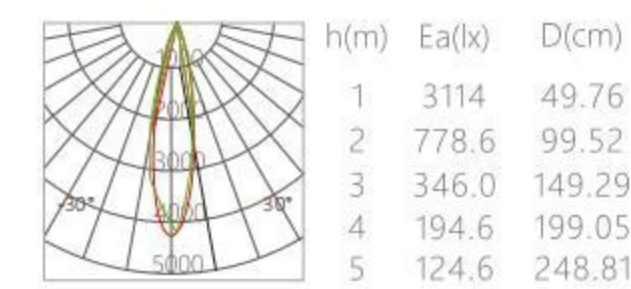


DC 48V	3000K Ra>90	ON/OFF	BK
	4000K Ra>90	0-10V Optional	WH
	6500K Ra>90	0-220V Optional	IP20
	UGR<=6		
OSRAM	SAN AN	CREE	BRIDGELUX

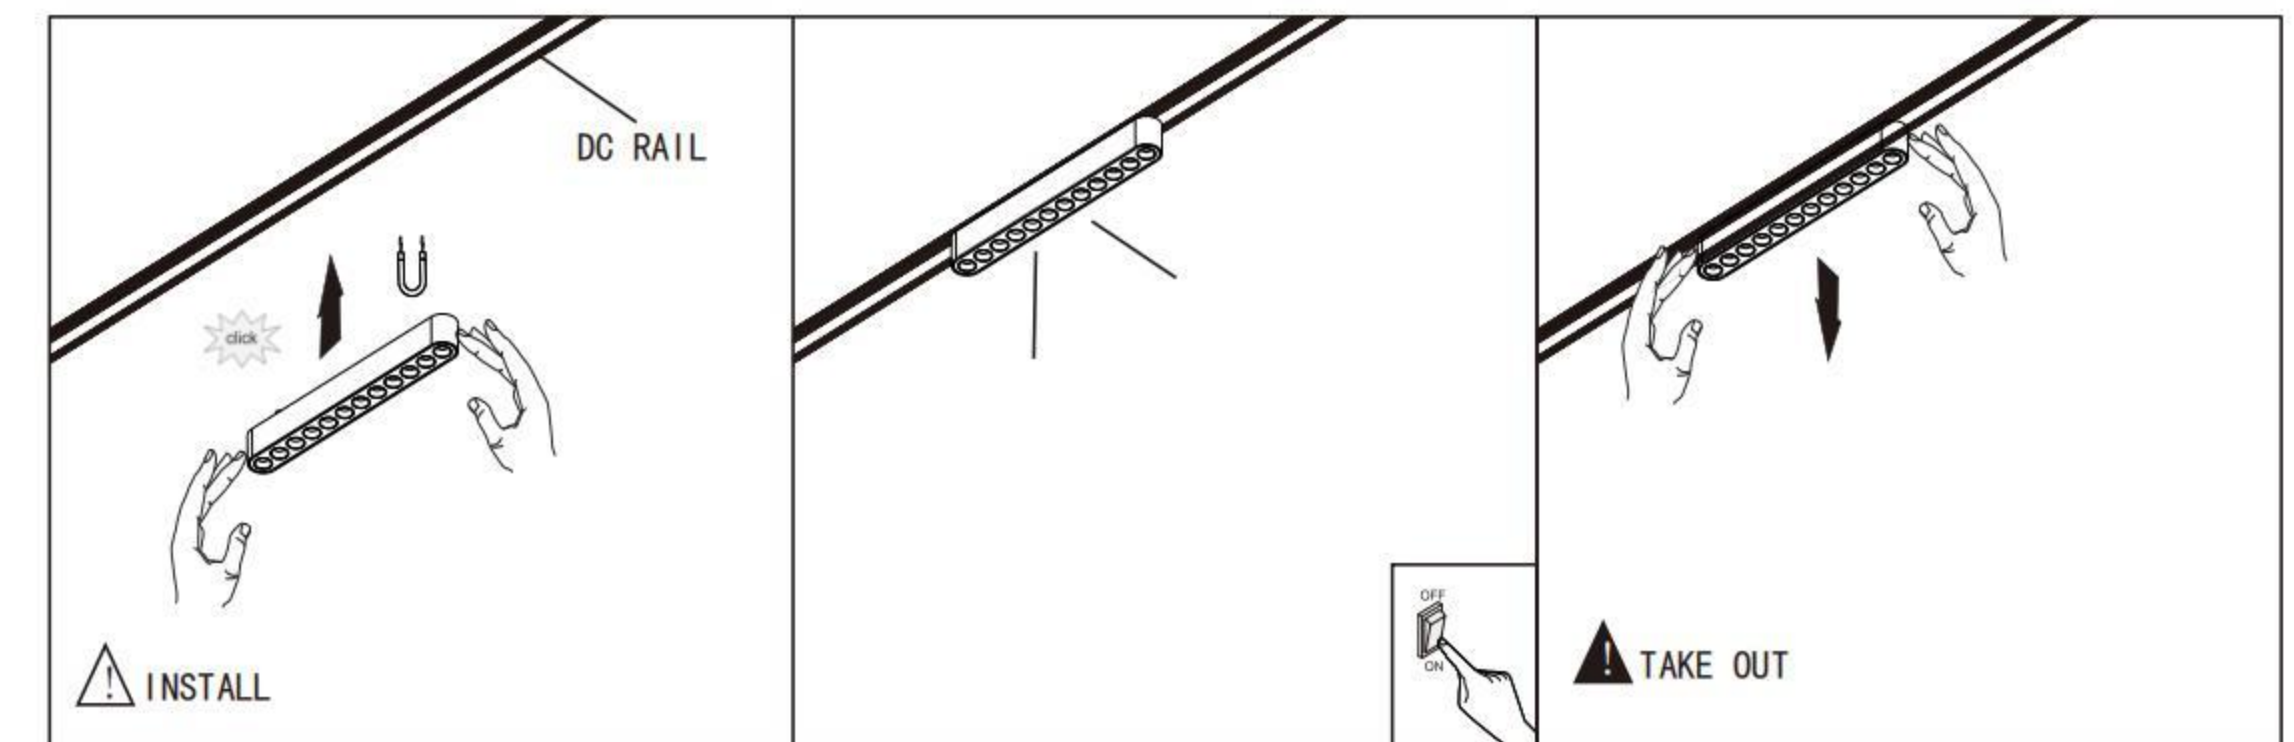

TECHNICAL SPECIFICATIONS

Model No:	UTR-GS
Power :	6W/12W/18W
Colour Temperature :	3000K/4000K/6500K
Colour Rendering Index :	CRI>80
Housing material :	Alumium + PC
Input parameter :	DC48V
Light source type :	SMD

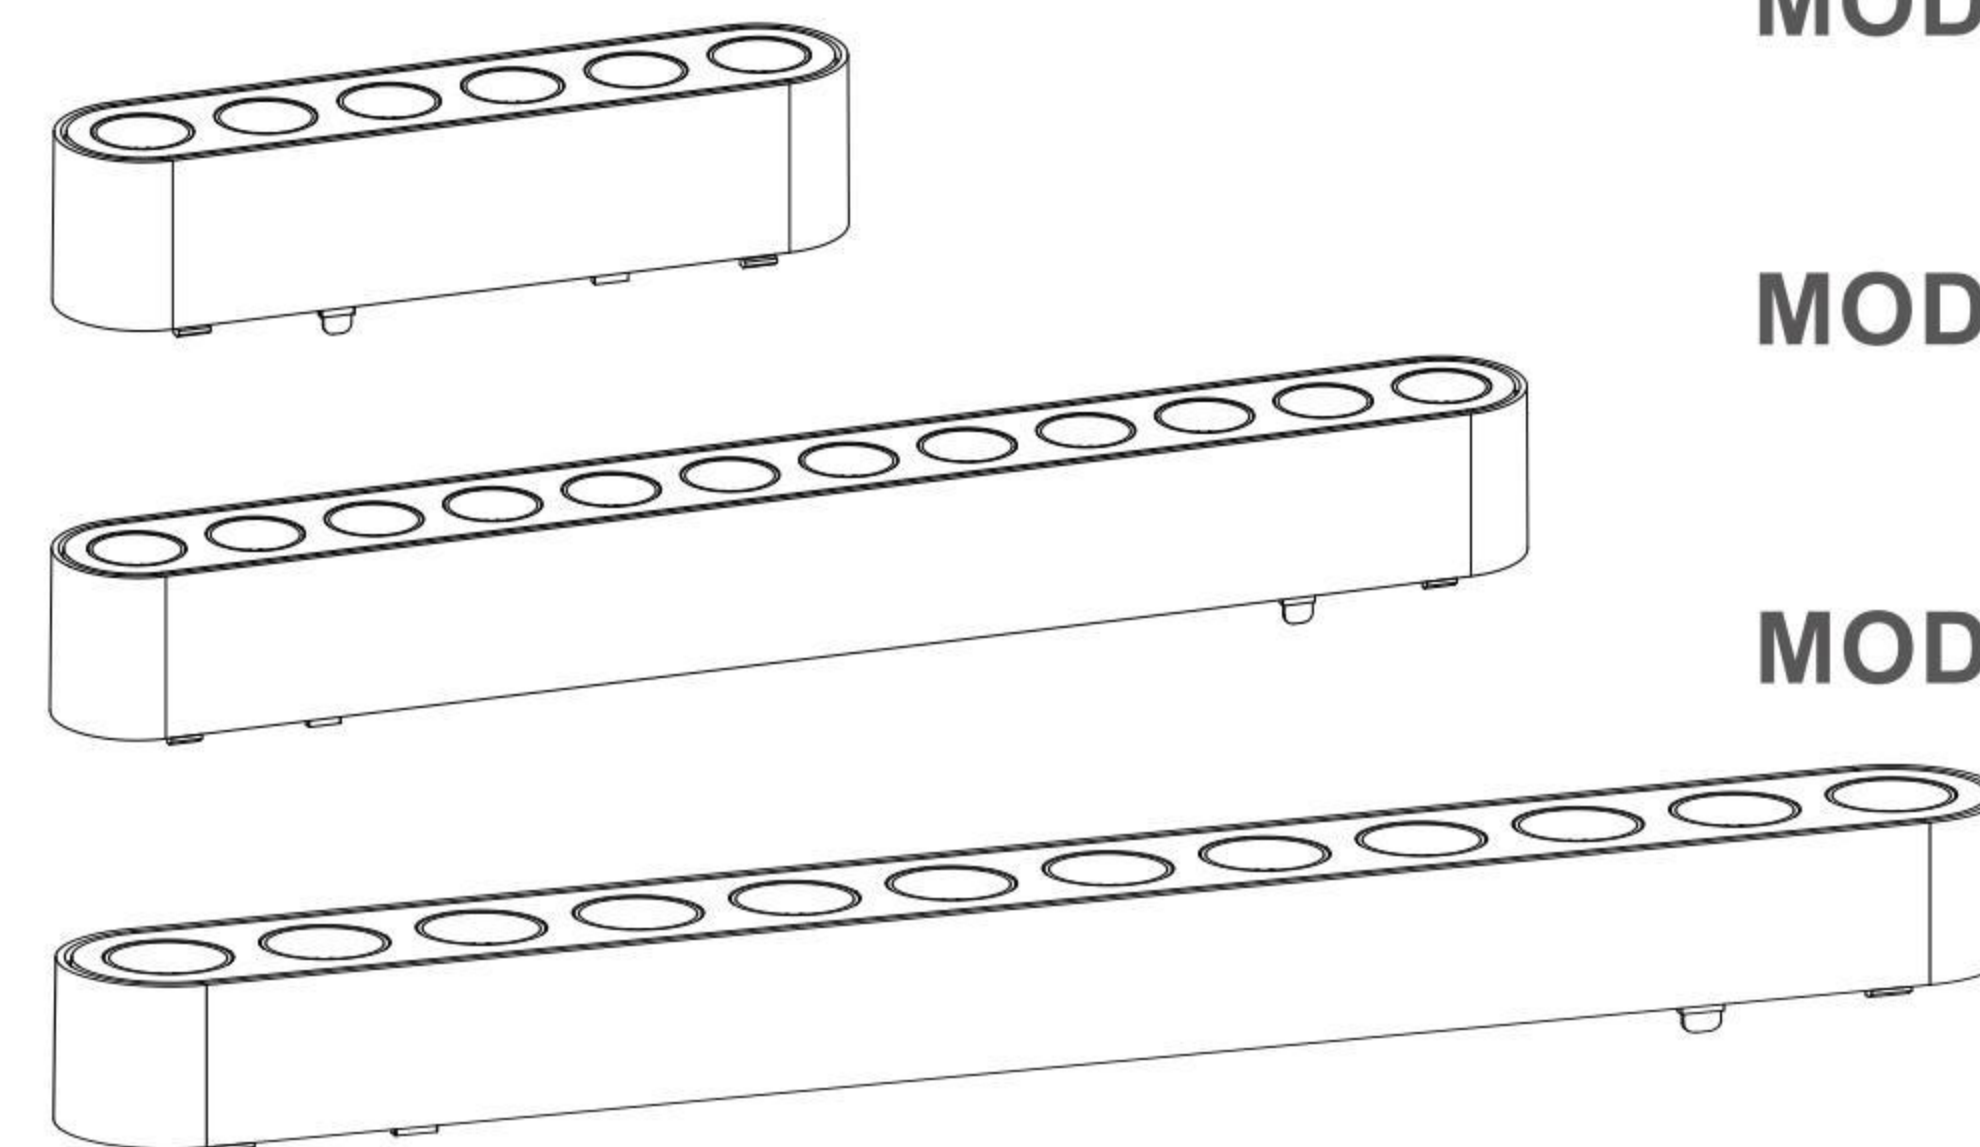

MODEL :UTR-GS:6W
L:120 W:26 H:26

MODEL :UTR-GS:12W
L:235 W:26 H:26

MODEL :UTR-GS:18W
L:450 W:26 H:26