




**UTR-ZG**



UTR-ZG SERIES

SMD	24°	6W			36°	6W			90°	DC 48V	3000K Ra>90	ON/OFF	BK
		h(m)	Ea(lx)	D(cm)		h(m)	Ea(lx)	D(cm)					
		1	1983	38.03	1	810.5	53.84						
		2	495.7	76.06	2	202.6	107.68						
		3	220.3	114.09	3	90.06	161.53						
		4	123.9	152.12	4	50.66	215.37						
		5	79.31	190.15	5	32.42	269.21						
		12W				12W							
		1	3114	49.76	1	6086	47.49						
		2	778.6	99.52	2	1522	94.98						
		3	346.0	149.29	3	676.2	142.46						
		4	194.6	199.05	4	380.4	189.95						
		5	124.6	248.81	5	243.4	237.44						


90°	DC 48V	3000K Ra>90	ON/OFF	BK
H	4000K Ra>90	0-10V Optional	WH	
T	6500K Ra>90	0-220V Optional	IP20	
E	UGR<6	W		
OSRAM	SAN AN	CREE	BRIDGELUX	

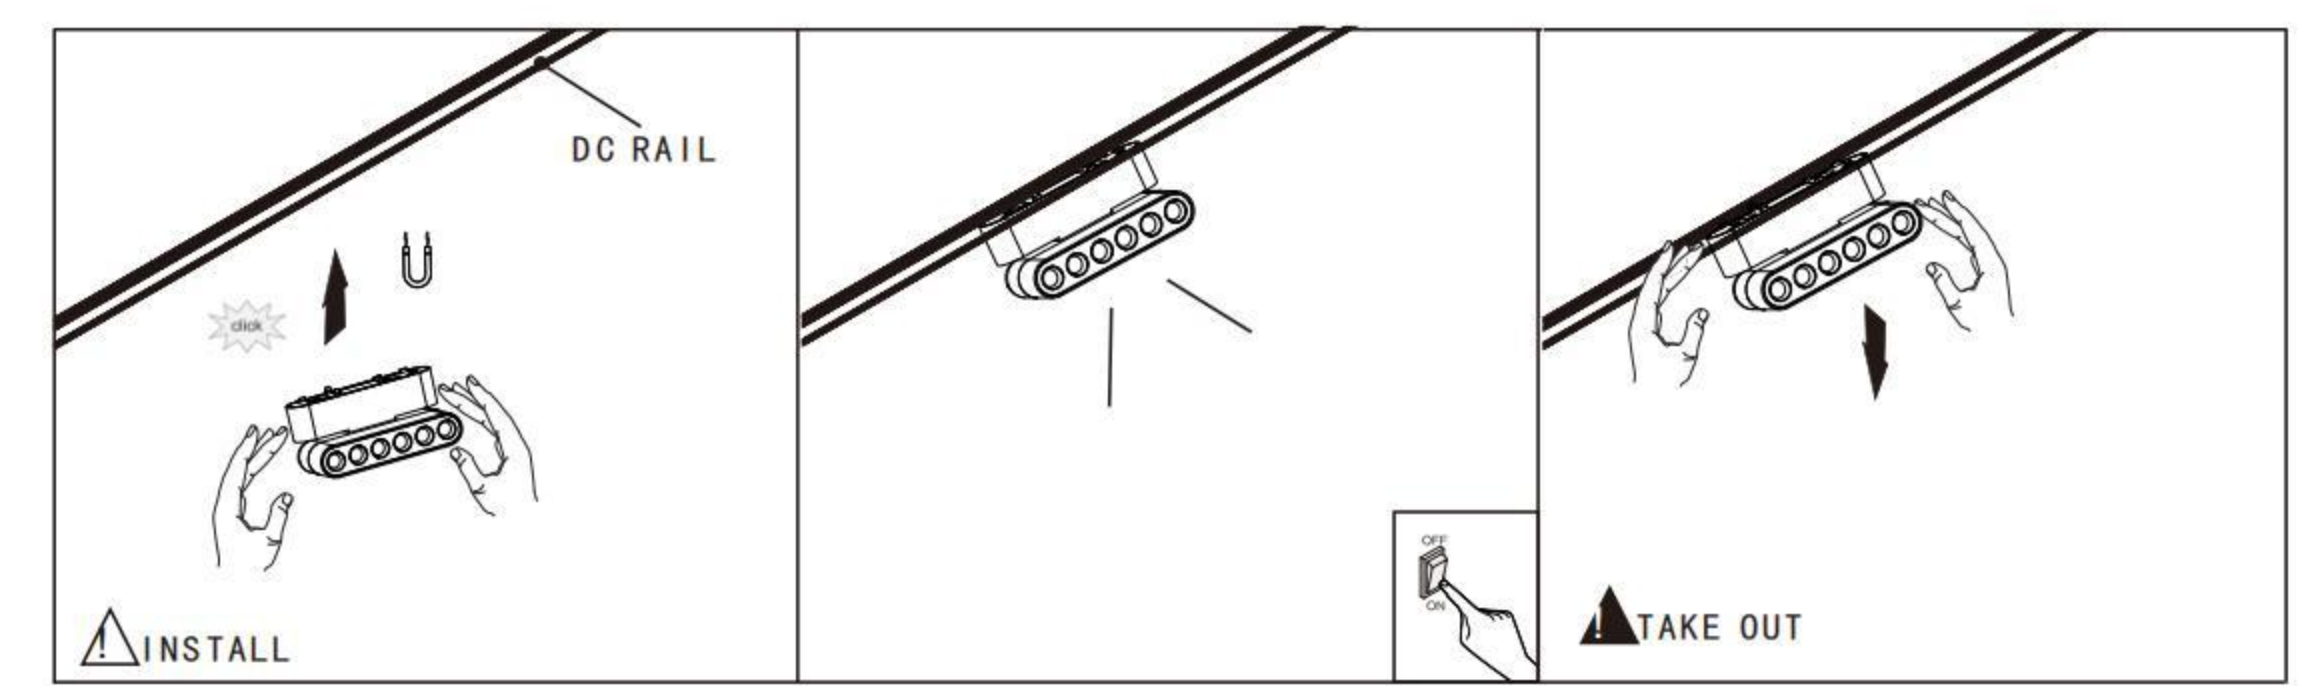

**TECHNICAL SPECIFICATIONS**

<b>Model No:</b>	UTR-ZG
<b>Power :</b>	6W/12W
<b>Colour Temperature :</b>	3000K/4000K/6500K
<b>Colour Rendering Index :</b>	CRI>80
<b>Housing material :</b>	Alumium + PC
<b>Input parameter :</b>	DC48V
<b>Light source type :</b>	SMD

**MODEL :UTR-ZG6W**

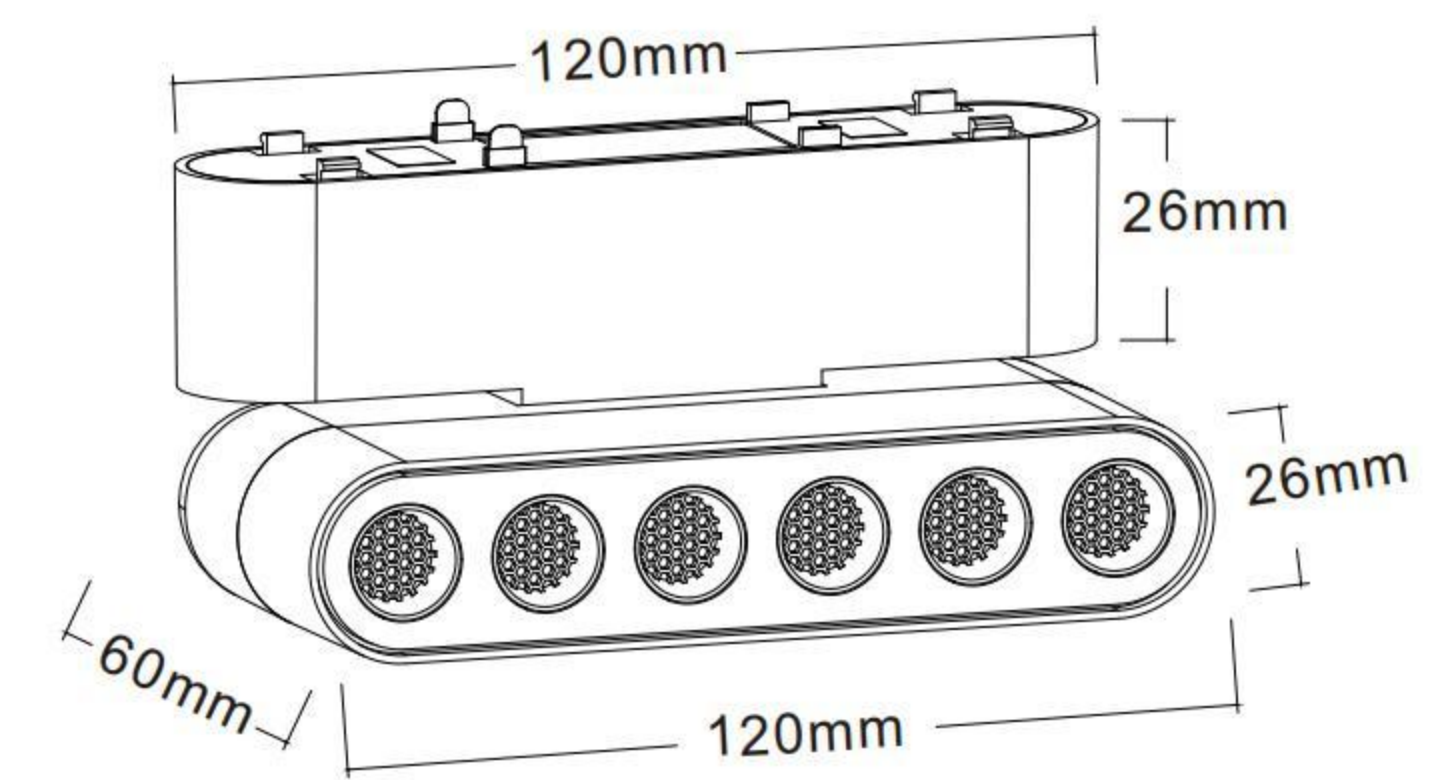

**MODEL :UTR-ZG12W**

