



**LISHUAI FILM &  
TELEVISION EQUIPMENT**

NEW PRODUCT LAUNCH 2024



Creating a Beautiful World of Light and Shadow

# ■ FLAGLITE

## FL100X/C / FL200X/C / FL200LX/LC

### Dual Color / Full Color Ultra-Thin Panel Light



*200W Foldable  
Power and Portability  
Combined*



Model	FL100X/C	FL200X/C	FL200LX/LC
Power	110W		210W
Beam angle	120°		120°
Color temperature	2700K-6500K/10000K		2700K-6500K/10000K
CRI	Average 96/95		Average 96/95
TLCI	Average 98/96		Average 98/96
Rf	Average 94/92		Average 94/92
Rg	Average 103/100		Average 103/100
Voltage	AC100V-240V,50/60Hz		AC100V-240V,50/60Hz
Size (light body)	605X315X15mm	605X605X25mm ( Unfolded) 605X310X40mm (Folded)	1175X315X25mm ( Unfolded) 595x315x40mm (Folded)
Control box size	144X85X272mm		144X85X272mm
Weight	1.48kg		1.48kg
Control box weight	1.85kg		1.85kg

# ■ FLAGLITE E70X

## Ultra-Thin Lightweight Panel Light


### Lightweight panel Your top choice

15mm slim and light body design  
Breaking through spatial limitations

Integrated light control  
Convenient fill light

Comes with magnetic attachment function  
Expand more application scenarios

Type-C interface  
Unlock multiple power supply modes

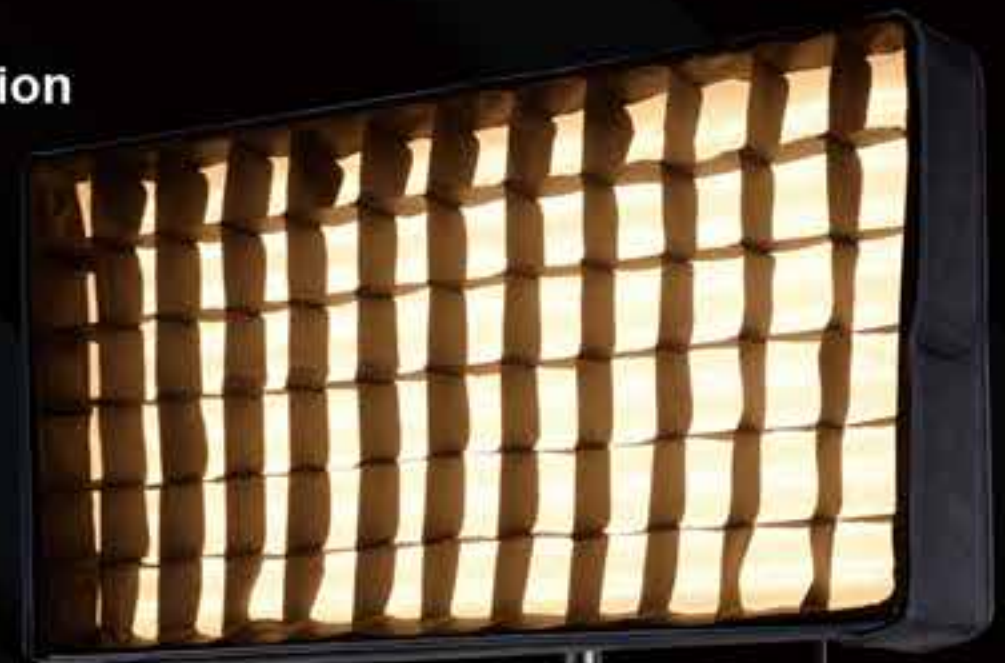

<b>Model</b>	<b>E70X</b>
Power	70W
Beam angle	120°
Color temperature	2700K-6500K
CRI	Average 96
TLCI	Average 98
Rf	Average 94
Rg	Average 103
Voltage	AC100V-240V,50/60Hz
Size (light body)	605X315X15mm
Weight	1.7kg
Weight(with magnetic arm)	1.9kg



# ■ COOLCAM 400X

## High Power Integrated Professional Studio Lighting

Model	400X(G)	TLCI	Average 97
Power	450W	Rf/Rg	Average 94/Average 103
Beam angle	120°	Voltage	AC100V-240V,50/60Hz
Color temperature	2700K-6500K	Size	300X240X375mm
CRI	Average 96	Weight	5.3kg



# ■ SPARKLUME 200B

## 200W Bi-Color Light

Integrated  
Light  
Control



<b>Model</b>	<b>200B</b>
Power	215W
Beam angle	120°
Color temperature	2700K-6500K
CRI	≥ 96
TLCI	≥ 97
Rf	Average 93
Rg	Average 100
Voltage	AC100V-240V,50/60Hz
Size	252X142X170mm
Weight	1.63kg

# ■ FOCUS 200C

## RGB Full-Color Video Light

### Being Outstanding

High-Power

**220W**



<b>Model</b>	<b>200C</b>
<b>Power</b>	220W max
<b>Beam angle</b>	120°
<b>Color temperature</b>	2700K-7500K
<b>CRI</b>	Average 95
<b>TLCI</b>	Average 97
<b>Rf</b>	Average 92
<b>Rg</b>	Average 101
<b>Voltage</b>	Adapter AC100V-240V Lamp body DC48V
<b>Size</b>	290X132X240mm
<b>Weight</b>	Lamp body 2.65kg Adapter 1.1kg

# ■ VELALITE W40X

## Ultra Wide Angle Curved Light

- Curved Shape
- Bright and Soft
- Small and Lightweight
- Wide Angle Light Beam



<b>Model</b>	<b>W40X</b>
<b>Power</b>	<b>45W max</b>
<b>Beam angle</b>	<b>190°</b>
<b>Color temperature</b>	<b>2700K-6500K</b>
<b>CRI</b>	<b>Average 96</b>
<b>TLCI</b>	<b>Average 98</b>
<b>Rf</b>	<b>Average 92</b>
<b>Rg</b>	<b>Average 103</b>
<b>Voltage</b>	<b>AC100V-240V,50/60Hz</b>
<b>Size (light body)</b>	<b>305X180X90mm</b>
<b>Weight</b>	<b>800g</b>
<b>Octopus tripod weight</b>	<b>140g</b>

# ■ VELALITE W40C

## Ultra Wide Angle Curved Light

### The Light Warrior

- 190 ° innovative wide angle Arc-Shaped luminescence
- 45W/800g  
Lightweight, soft and bright
- 4-way power supply mode  
Switching between indoor and outdoor shooting
- Adsorption remote controller  
Unrestricted lighting control: integrated or separate
- One-click splicing function  
Unlock more gameplay with matrix output



Model	W40C
Power	45W max
Beam angle	190°
Color temperature	2700K-10000K
CRI	Average 95
TLCI	Average 96
Rf	Average 92
Rg	Average 100
Voltage	AC100V-240V,50/60Hz
Size (light body)	305X180X90mm
Weight	800g
Octopus tripod weight	140g



# ■ VELALITE W220c

## Full Color Wide-Angle Curved Shape 230W



230W  
constant power



240°  
luminous surface



36 million  
RGB colors



Full color  
gamut adjustable

<b>Model</b>	<b>W220C</b>
<b>Power</b>	230W
<b>Beam angle</b>	160°
<b>Color temperature</b>	2700K-10000K
<b>CRI</b>	Average 95
<b>TLCI</b>	Average 97
<b>Rf</b>	Average 92
<b>Rg</b>	Average 101
<b>Voltage</b>	AC100V-240V,50/60Hz
<b>V-lock battery output</b>	13~30V
<b>Battery Compatibility</b>	14.8V,16.8V battery half power output, 26V,28.8V battery full power output
<b>Size (light body)</b>	510X235X320mm
<b>Weight</b>	6kg
<b>Weight of ball head bracket</b>	1kg

# Cinematic Professional Shooting



Add:NO.55 East Zhenxing Road,Yuyao City,Zhejiang Province,China  
Tel:+86-574-62763333/62636368  
Fax:+86-574-62636398  
Email:ls@lishuai.com.cn  
Http:www.lishuai-lighting.com



Light Reel APP



Facebook



Tiktok