

Lighting Solutions Catalogue



YUYAO LISHUAI FILM & TELEVISION EQUIPMENT CO.,LTD
Add: No.55 East Zhenxing Road,Yuyao City,Zhejiang Province,China
Tel: +86-574-62763333/62636368 Fax: +86-574-62636398
Email: ls@lishuai.com.cn Http: www.lishuai-lighting.com



Facebook

T Z E T Z O U

07

COB Lights

SPARKLUME 100B/200B/300B
COOLCAM 120X(G)/200X(G)/300X(G)
COOLCAM 200D(G)/300D(G)
COOLCAM 200C
COOLCAM400X(G)

19

Weatherproof COB lights

FOCUS 1000X PRO/300X pro
FOCUS 1000D PRO/2000X PRO

25

ACCESSORIES

Softbox
Spotlight mount
Fresnel mount
Beauty dish
Power station

29

Panel Lights

COOLCAM P60X(G)
COOLCAM P60(G)/P120(G)
C-700RSV 2.0 Edition
FLAGLITE E70X

37

Foldable Panel Lights

FLAGLITE F200
FLAGLITE F300X/F300C
FLAGLITE F1200X
FLAGLITE FL100X/FL200X/FL200LX
FLAGLITE FL100C/FL200C/FL200LC

51

Studio Panel lights

VELALITE W40X/W40C
VELALITE W220C/ W220X
VICTORSOFT V-2000ASVL/V-4000ASVL/V-6000ASVL

59

Full Color Panel lights

HUESCAPE HS-120
HUESCAPE HS-300
HUESCAPE HS-600
HSESCA[E HS-600S

63

Stick lights

COOLCAM T50C

65

Full color Tube Lights

HS-T25
HS-T60
HS-T120

69

ACCESSORIES

Light stand
Super Clamp
Bag & Case

Light Reel Intelligent Light Control App Makes “Light ” Accessible to You

Lishuai 's new generation intelligent light control system, based on exclusive technology, allows mobile devices such as smartphones to directly connect and control numerous Lishuai lighting equipment. A brand new workflow mode enhances your shooting experience



APP Download



| Full Scene Coverage

Suitable for flat photography, short video shooting, advertising photography, e-commerce visuals, outdoor photography, and new media contents.



Set

Complete sets of products and solutions meet customers' one-stop lighting needs.



Intelligence

One click control of intelligent lighting APP for different applications in all scenarios



Service

Full case service, ecological accessory support, closely related to every link



| Magic Tool for Commercial Shoots



Intelligent

New intelligent APP for light control
Wireless control, instant scene access



All-weather

Rainproof and extreme weather resistant
24/7 guarantee for filming



High power

Breaking through the limitations of LED light technology
Pioneering high-power innovation



Lightweight

Carry out subtraction to the end
Portable and ready to light



■ Product Specifications

Model	100B	200B
Power	100W	215W
Beam angle	120°	
Color temperature	2700K-6500K	
CRI	≥96	
TLCI	≥97	
Rf	Average 93	
Rg	Average 100	
Working voltage	AC100V-240V	
Size	252X142X170mm	
Weight	About 1.63kg	

100B Illuminance						
CCT	Distance		1m	2m	3m	4m
	Illuminance					
2700K	W/O reflector	2993Lux	759Lux	337Lux	201Lux	
	Standard reflector	20391Lux	3192Lux	1226Lux	653Lux	
3200K	W/O reflector	3170Lux	804Lux	369Lux	213Lux	
	Standard reflector	21594Lux	3373Lux	1296Lux	692Lux	
5600K	W/O reflector	3671Lux	927Lux	422Lux	247Lux	
	Standard reflector	24999Lux	3880Lux	1486Lux	797Lux	
6500K	W/O reflector	3779Lux	955Lux	435Lux	254Lux	
	Standard reflector	25696Lux	3926Lux	1528Lux	802Lux	

200B Illuminance						
CCT	Distance		1m	2m	3m	4m
	Illuminance					
2700K	W/O reflector		5728Lux	1499Lux	725Lux	320Lux
	Standard reflector		35084Lux	5946Lux	2328Lux	805Lux
3200K	W/O reflector		5974Lux	1563Lux	755Lux	334Lux
	Standard reflector		36656Lux	6213Lux	2435Lux	842Lux
5600K	W/O reflector		6678Lux	1760Lux	849Lux	376Lux
	Standard reflector		41587Lux	6996Lux	2768Lux	950Lux
6500K	W/O reflector		6815Lux	1798Lux	867Lux	384Lux
	Standard reflector		42543Lux	7148Lux	2831Lux	972Lux

■ SPARKLUME 100B/200B

Your choice for live streaming rooms



Four major indicators
High CRI



Intelligent APP
scene based
light control



Lightweight design
makes it more
convenient



Bowens Mount
accepts various
accessories



■ Product Specifications

Model	300B
Power	300W
Beam angle	120°
Color temperature	2700K-6500K
CRI	≥ 96
TLCI	≥ 97
Rf	Average 93
Rg	Average 100
Working voltage	AC200V-240V
Size	302x142x170mm
Weight	About 1.8kg

300B Illuminance					
CCT	Distance Illuminance	1m	2m	3m	5m
2700K	W/O reflector	7675Lux	1975Lux	930Lux	394Lux
	Standard reflector	46366Lux	7939Lux	3075Lux	1056Lux
3200K	W/O reflector	8085Lux	2079Lux	979Lux	415Lux
	Standard reflector	49129Lux	8377Lux	3247Lux	1116Lux
5600K	W/O reflector	9442Lux	2441Lux	1144Lux	487Lux
	Standard reflector	58535Lux	9844Lux	3830Lux	1319Lux
6500K	W/O reflector	9756Lux	2519Lux	1182Lux	496Lux
	Standard reflector	60628Lux	10172Lux	3958Lux	1367Lux

- Lamp body
- Standard reflector
- AC Power cord
- Protective cover
- Instructions



■ SPARKLUME 300B

Dual-color Temperature
Live Broadcast Lamp

300W





120X-G & 200X-G & 300X-G

Professional Level for Efficient Lighting

Accurate Color: Rejects distortion for true-to-life colors
Versatile Use: Easily adapts to multi-scene shooting



Product Specifications

Model	120X(G)	200X(G)	300X(G)
Power	146W max	220W max	310W max
Beam angle	120°		
Color temperature	2700K(±200K)-6500K(±300K)		
CRI	≥95	≥95	≥95
TLCI	≥97	≥97	≥96
Dimming range	0-100%		
Voltage	AC100-240V,DC48V		
Scene mode	Support 11 kinds		
Dimension (with stand adapter)	235x132x240mm	235x132x240mm	290x132x240mm
Weight	2.34kg	2.34kg	2.75kg

120X (G) Illuminance without reflector					
CCT Distance Illuminance	2700K	3200K	4400K	5600K	6500K
1m	3259Lux	4191Lux	4636Lux	4377Lux	3724Lux
2m	844Lux	1085Lux	1212Lux	1125Lux	968Lux
120X (G) Illuminance with reflector					
1m	21991Lux	27653Lux	31474Lux	29471Lux	25289Lux
2m	3629Lux	4586Lux	5214Lux	4870Lux	4176Lux

200X (G) Illuminance without reflector					
CCT Distance Illuminance	2700K	3200K	4400K	5600K	6500K
1m	4164Lux	5287Lux	5941Lux	5787Lux	5101Lux
2m	1081Lux	1368Lux	1579Lux	1541Lux	1333Lux
200X (G) Illuminance with reflector					
1m	27053Lux	37888Lux	41102Lux	41499Lux	35692Lux
2m	4714Lux	6089Lux	6937Lux	7027Lux	6047Lux

300X (G) Illuminance without reflector					
CCT Distance Illuminance	2700K	3200K	4400K	5600K	6500K
1m	6546Lux	8187Lux	9087Lux	9968Lux	9351Lux
3m	771Lux	965Lux	1074Lux	1171Lux	1102Lux
300X (G) Illuminance with reflector					
1m	42823Lux	53512Lux	60221Lux	65185Lux	60916Lux
3m	2675Lux	3344Lux	3743Lux	4069Lux	3851Lux

Make Movie Accessible



220W high power
The sense of space is effortless




Single or dual color options
Adjust the scene atmosphere at will



11 major special effects
Tell a story with lights



High-quality appearance
Immersive live streaming starts

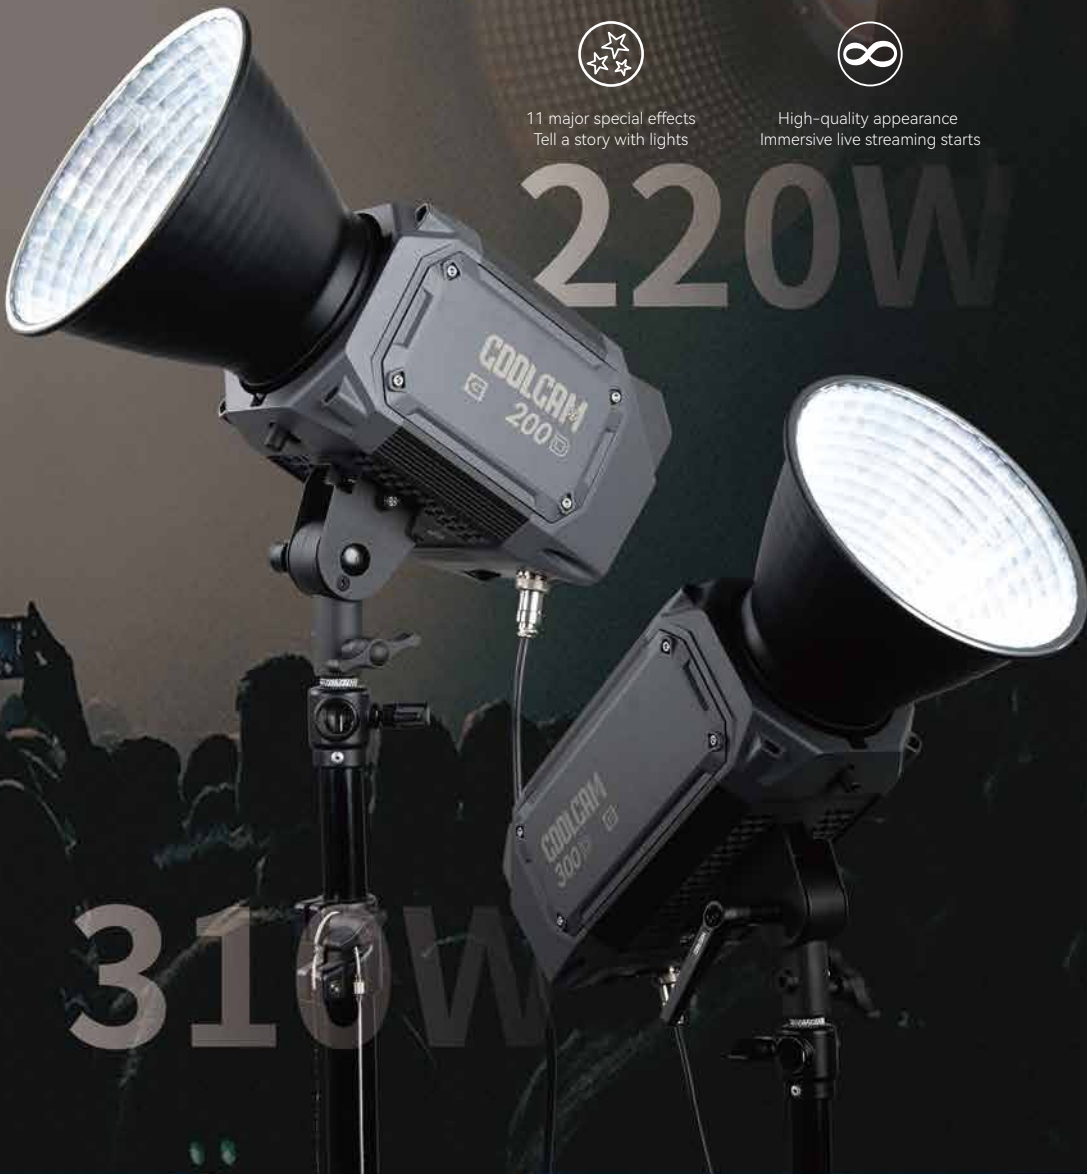

COOLCAM 200D-G & 300D-G

Product Specifications

Model	200D(G)	300D(G)
Power	220W	310W
Color temperature	5600K(±300K)	
CRI	≥96	
Beam angle	120°	
TLCI	≥97	
Dimming range	0-100%	
Voltage	AC200-240V,DC48V	
Scene mode	Support 11 kinds	
Dimension (with stand adapter)	235x132x240mm	290x132x240mm
Weight	2.34kg	2.75kg

200D (G) Illuminance			300D (G) Illuminance		
Distance	W/O reflector	W/ reflector	Distance	W/O reflector	W/ reflector
1m	7456Lux	52757Lux	1m	11059Lux	71493Lux
3m	880Lux	3243Lux	3m	1281Lux	4431Lux

- Lamp body
- Standard reflector
- Power cord
- AC adapter
- Protective cover
- Safety rope
- Instructions



COOLCAM 200C

Outstanding in Color



Product Specifications

Model	200C
Power	220 W max
Beam angle	120°
Color temperature	2700K-7500K
CRI	Average 95
TLCI	Average 97
Rf	Average 92
Rg	Average 101
Voltage	AC adapter:AC100V-240V, lamp body:DC48V
Size	290x132x240mm
Weight	Lamp body2.65kg, AC adapter 1.1kg

200C Illuminance					
CCT	Distance Illuminance	0.5m	1m	1.5m	2m
2700K	W/O reflector	5072Lux	1307Lux	581Lux	211Lux
	W/ reflector	15020Lux	2925Lux	1212Lux	408Lux
3200K	W/O reflector	5600Lux	1441Lux	639Lux	233Lux
	W/ reflector	16565Lux	3234Lux	1338Lux	451Lux
5600K	W/O reflector	6418Lux	1646Lux	728Lux	268Lux
	W/ reflector	19188Lux	3705Lux	1540Lux	519Lux
7500K	W/O reflector	6667Lux	1720Lux	765Lux	278Lux
	W/ reflector	20025Lux	3909Lux	1616Lux	542Lux
Red light	W/O reflector	1047Lux	267Lux	119Lux	43Lux
	W/ reflector	3124Lux	607Lux	252Lux	85Lux
Green light	W/O reflector	3226Lux	805Lux	359Lux	131Lux
	W/ reflector	10459Lux	1992Lux	816Lux	274Lux
Blue light	W/O reflector	613Lux	146Lux	67Lux	23Lux
	W/ reflector	1831Lux	325Lux	129Lux	46Lux

■ COOLCAM 400X G

High Power Integrated Professional Studio Lighting



450W

■ Product Specifications

Model	400X(G)
Power	450 W max
Beam angle	120°
Color temperature	2700K-6500K
CRI	Average 96
TLCI	Average 97
Rf	Average 94
Rg	Average 103
Voltage	AC100V-240V,50/60Hz
Size	300x240x375mm
Weight	5.3kg

400X(G) Illuminance without reflector				
CCT Distance Illuminance	2700K	3200K	5600K	6500K
1m	11210Lux	12200Lux	14110Lux	14710Lux
2m	2870Lux	3120Lux	3610Lux	3790Lux
400X (G) Illuminance with reflector				
1m	32690Lux	35650Lux	41090Lux	43710Lux
2m	7550Lux	8290Lux	9670Lux	10190Lux

- Lamp body
- Standard reflector
- Power cord
- Protective cover
- Instructions



■ Product Specifications

Model	300X pro	1000X pro
Power	400W max	680W max
Beam angle	120°	
Color temperature	2700K(±200K)-6500K(±300K)	
CRI	Ra:96-98	≥95
TLCI	≥97	≥96
Dimming range	0-100%	
Working voltage	AC100-240V,DC24-36V	AC100-240V,DC36-48V
Heat dissipation system	Heat pipe radiator+temperature controlled fan (automatic control fan)	
Size	300X240X375mm	263X307X426mm
Weight	5kg (Lamp body) 3kg (Control box)	5.49kg (Lamp body) 8.3kg (Control box)

1000X pro Illuminance without reflector						
CCT	2700K	3200K	4400K	5600K	6500K	
Distance	Illumination					
1m	12258Lux	16641Lux	18389Lux	18830Lux	1645Lux	
3m	1669Lux	2199Lux	2463Lux	2543Lux	2222Lux	
1000X pro Illuminance with reflector						
1m	146900Lux	197000Lux	224500Lux	230000Lux	197800Lux	
3m	9349Lux	12412Lux	13751Lux	14386Lux	12744Lux	

300X pro Illuminance without reflector						
CCT	2700K	3200K	4400K	5600K	6500K	
Distance	Illumination					
1m	6314Lux	7838Lux	11338Lux	11032Lux	9505Lux	
2m	1610Lux	2008Lux	2909Lux	2838Lux	2456Lux	
300X pro Illuminance with reflector						
1m	19004Lux	24103Lux	34555Lux	33690Lux	29316Lux	
2m	4371Lux	5504Lux	8002Lux	7809Lux	6751Lux	



Your Excellent Performer

FOCUS 1000X PRO

- High power high brightness COB
- High-intensity waterproof
- Lishuai wireless APP control
- Deep dimming



- Owl NOCTUA fan
- Super color rendering restore true colors
- One lamp has multiple functions
- Wireless DMX control

FOCUS 300X PRO



■ Product Specifications

Model	1000D pro	2000X pro
Power	1000W	1000W max
Beam angle	90°	
Color temperature	5600K(±300K)	2700K(±200K)-6500K(±300K)
CRI	≥96	≥95
TLCI	≥96	
Dimming range	0-100%	
Voltage	AC100-240V,DC48-60V	
Heat dissipation system	Heat pipe radiator+temperature controlled fan (automatic control fan)	
Dimension (without stand adapter)	313x219x210mm	313x352x498mm
Weight	7.25kg (Lamp body)	7.7kg (Control box)

1000D pro Illuminance				
Distance	W/O reflector	W/ 45°reflector	W/ 10°reflector	W/ 25°reflector
2m	14727Lux	26453Lux	—	88225Lux
3m	6592Lux	11118Lux	63998Lux	37104Lux
5m	2455Lux	3864Lux	22508Lux	12336Lux
7m	1300Lux	1989Lux	11367Lux	6152Lux
9m	849Lux	1274Lux	6867Lux	3711Lux

2000X pro Illuminance without reflector					
CCT Distance Illuminance	2700K	3200K	4400K	5600K	6500K
3m	3586Lux	4023Lux	4684Lux	4910Lux	4913Lux
5m	1350Lux	1517Lux	1756Lux	1844Lux	1845Lux
2000X pro Illuminance with 10°reflector					
3m	41879Lux	47333Lux	53889Lux	57077Lux	56735Lux
5m	14210Lux	16106Lux	18350Lux	19666Lux	19393Lux
2000X pro Illuminance with 25°reflector					
3m	22735Lux	25751Lux	29929Lux	31278Lux	31149Lux
5m	7474Lux	8470Lux	9789Lux	10331Lux	10340Lux
2000X pro Illuminance with 45°reflector					
3m	6750Lux	7633Lux	8832Lux	9283Lux	9282Lux
5m	2359Lux	2648Lux	3062Lux	3212Lux	3192Lux

Born Strong
Made for Film

FOCUS 2000X_{PRO}

FOCUS 1000D_{PRO}





【10°Reflector】



【25°Reflector】



【45°Reflector】



- Lamp body
- Control box
- Standard reflector
- Power cord
- Extension cable
- DMX cable
- Protective cover
- Safety cable
- Aluminum box with wheels

|Accessories



| Deep parabolic softbox |

Model	P70	P90	P120	P150
Material	High temperature resistant soft light fabric			
Diameter	70x50cm	90x58cm	120x68cm	150x80cm
Weight	1.7kg	1.9kg	2.5kg	3.6kg
Suitable for models	Full range spotlight			
Mount	Bowens mount			
Accessory	White diffuser			
Accessory available	Fabric honeycomb grid			

Model	SBL65	SBL80	SBL100	SBL120
Material	High temperature resistant soft light fabric			
Dimension	65cm	80cm	100cm	120cm
Suitable for models	Full range spotlight			
Mount	Bowens mount			



| Lantern softbox |

Model	CS3120K
Material	High temperature resistant soft light fabric
Weight	1KG
Dimension	30x120cm
Suitable for models	120X,200D/X,300D/X,600D/X
Mount	Bowens mount



| Strip Softbox |

Model	CS690K
Material	High temperature resistant soft light fabric
Dimension	60x90cm
Suitable for models	120X,200D/X,300D/X,600D/X
Mount	Bowens mount



| Square softbox |



| Octagonal Softbox |

Model	S90
Material	High temperature resistant soft light fabric
Diameter	90x58cm
Weight	1.9kg
Suitable for models	Full range spotlight
Mount	Bowens mount
Accessory	White diffuser
Accessory available	Fabric honeycomb grid

| Spotlight mount
SN-1980 |



| Snoot |



| Spotlight mount
SN-1950 |



| Fresnel mount |



| Beauty dish |



| Power station
PSV4810 |



Create a Beautiful World of Light and Shadow

— More professional, advanced, and convenient —



*Live lighting
Everything is under control*



■ Product Specifications

Model	P60X(G)
Power	60W
Beam angle	120°
Color temperature	2700K-6500K
CRI	≥95
TLCI	≥97
Rf	Average 94
Rg	Average 104
Working voltage	AC100V-240V,DC15V
Size	360x380x60mm
Weight	2.2kg

P60X(G) Illuminance without accessory				
CCT Distance Illuminance	2700K	3200K	5600K	6500K
1m	1753Lux	1904Lux	2063Lux	1970Lux
2m	481Lux	517Lux	562Lux	543Lux
P60X(G) Illuminance with softbox				
1m	1157Lux	1257Lux	1362Lux	1300Lux
2m	289Lux	310Lux	337Lux	326Lux

- Light
 - Softbox
 - AC power cord
- AC power adapter
 - Safety cable
 - Instructions



Bi-Color Temperature Panel Light



High
Brightness

Lightweight

Soft
Lighting

■ Product Specifications

Model	P60(G)	P120(G)
Power	60W	120W
Size	360X413X79mm	600x413x79mm
Weight	4.2kg	5.8kg
Beam angle	120°	
Color temperature	2700K(±150K)-6500K(±300K)	
CRI	≥95	
TLCI	≥97	
Working voltage	AC100-240V,DC15V	
Light control method	Support DMX512, 2.4G wireless remote control, and Lishuai APP	
Scene mode	Support (11 kinds)	

P60(G) Illuminance					
CCT Distance Illuminance	2700K	3200K	4400K	5600K	6500K
1m	1890Lux	2021Lux	2184Lux	2162Lux	2146Lux
2m	513Lux	552Lux	592Lux	587Lux	574Lux

P120(G) Illuminance					
CCT Distance Illuminance	2700K	3200K	4400K	5600K	6500K
1m	3709Lux	3915Lux	4267Lux	4317Lux	4109Lux
2m	1034Lux	1093Lux	1186Lux	1193Lux	1160Lux



- Lamp body
- Barn door
- AC adapter
- Power cord
- Safety rope
- Instructions

Professional Lighting and Easy Operation



Wide range of color temperature
powerful and soft



Lightweight aluminum alloy body



Customized lighting accessories



Wide luminous range



COOLCAM P60 - G
60W



COOLCAM P120 - G
120W

■ C-700RSV 2.0 Edition 70W Bi-color Ultra Soft Light

- 360° Surround side lighting
 Provides even and consistent lighting

- 70W powerful output
 Balance soft light and high brightness

- 40cm diameter
 Innovative circular luminous surface



■ Product Specifications

Model	C-700RSV
Power	70W
Beam angle	120°
Color temperature	2700K-6500K
CRI/TLCI	Average 96/Average 98
Rf/Rg	Average 94/Average 103
Working voltage	AC100V-240V,50/60Hz
Size	555x530x50mm
Weight	3kg

C-700RSV Illuminance				
Distance \ CCT Illuminance	2700K	3200K	5600K	6500K
0.5m	4005Lux	4274Lux	4623Lux	4680Lux
1m	1163Lux	1235Lux	1352Lux	1359Lux
2m	314Lux	330Lux	355Lux	359Lux
3m	148Lux	156Lux	167Lux	169Lux
4m	90Lux	95Lux	101Lux	102Lux

- Lamp body
- AC power cord
- AC power adapter
- Safety cable
- Instructions



■ FLAGLITE E70X

Flaglite Easy

A slim 70W light designed for mobile photography and versatile shooting needs

Bi-Color Temperature

Panel Light 2700K-6500K



70W

■ Product Specifications

Model	E70X
Power	70W
Beam angle	120°
Color temperature	2700K-6500K
CRI	Average 96
TLCI	Average 98
Rf	Average 94
Rg	Average 103
Voltage	AC100V-240V,50/60Hz
Size	605X315X15mm
Weight	1.7kg

E70X Illuminance without softbox				
CCT Distance Illuminance	2700K	3200K	5600K	6500K
0.5m	7226Lux	7511Lux	8423Lux	8657Lux
1m	2164Lux	2293Lux	2550Lux	2603Lux
2m	586Lux	613Lux	690Lux	705Lux
3m	270Lux	282Lux	315Lux	322Lux
4m	156Lux	163Lux	183Lux	187Lux

E70X Illuminance with softbox				
CCT Distance Illuminance	2700K	3200K	5600K	6500K
0.5m	5736Lux	5907Lux	6802Lux	6878Lux
1m	1709Lux	1746Lux	1983Lux	2037Lux
2m	453Lux	472Lux	535Lux	546Lux
3m	207Lux	214Lux	242Lux	248Lux
4m	119Lux	125Lux	140Lux	143Lux

■ FLAGLITE F200/F300X/F300C

Foldscreen Lite

A compact version of the Foldscreen engineered for mobile lighting solutions

- Thin lamp body
Dazzling brightness
- Multiple configurations
One-step setup
- Innovative splicing
Multi-scene compatibility



■ Product Specifications


Model	F200	F300X	F300C
Power	200W	300W	300W
Beam angle	120°		
CCT	2700K-6500K	2700K-6500K	2700K-10000K
CRI	Average 96		
TLCI	Average 98		
Rf	Average 94		
Rg	Average 103		
Working voltage	AC100V-240V,50/60Hz		
V-lock battery output	13~30V		
Battery compatibility	14.8V,16.8V Battery half power output, 26V,28.8V Battery full power output		
Size(light body)	665X665X25mm		
Size(control box)	125X80X207mm		
Weight (with bracket, softbox)	3.3kg		
Weight of power control box	1.9kg	2.26kg	2.26kg



Softbox (Package Included)



Inflatable Air Softbox (Optional)

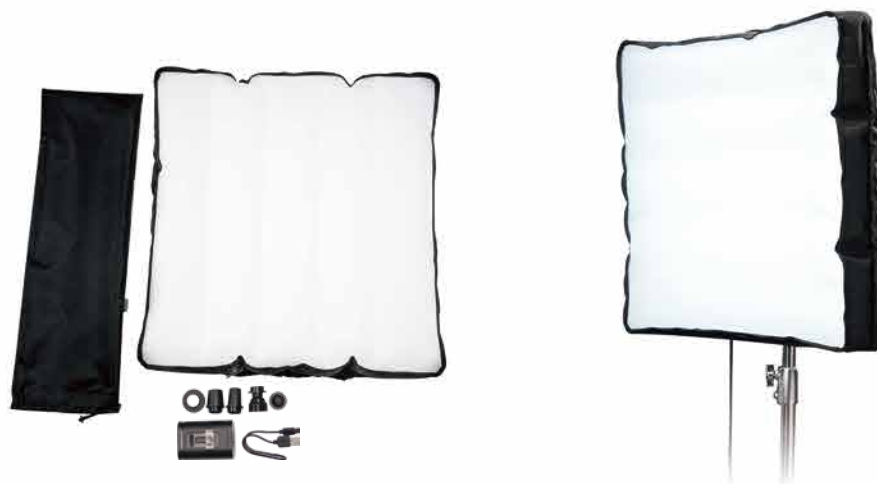

Creative Splicing Combination Multi Scene Flagship Lighting

600W



■ FLAGLITE F1200X FoldScreen Light

A powerful, 1200W lighting system engineered for large-scale applications, providing unmatched brightness and performance for professional settings and expansive environments




■ Product Specifications


Model	F1200X	F1200C
Power	1200W max	
Color temperature	2700K-10000K	
Working Voltage	AC100V-240V,50/60Hz	
CRI	Average 96	
TLCI	Average 98	
Rf	Average 94	
Rg	Average 103	
Working environment temperature	-20°C~45°C	
DC input	DC48~60V	
Size (light body)	1300X1300X50mm	
Size (control box)	162X235X401mm	
Weight	7.5kg(light body) 7.65kg(control box) 1.95kg(bracket)	




1200W
Intense
Illumination



1.3m*1.3m
Expansive
Light Area



Sleek
Radiant



DMX/APP
Lumenradio



■ FLAGLITE FL100X/FL200X/FL200L X

Professional Lighting
for Limited Space

110W & 210W



■ Product Specifications

Model	FL100X	FL200X	FL200LX
Power	110W	210W	210W
Beam angle	120°		
Color temperature	2700K-6500K		
CRI/TLCI	Average 96/Average 98		
Rf/Rg	Average 94/Average 103		
Working voltage	AC100V-240V,50/60Hz		
V-lock battery output	13~30V		
Battery Compatibility	14.8V,16.8V 26V,28.8V Battery full power output	14.8V,16.8V Battery half power output, 26V,28.8V Battery full power output	14.8V,16.8V Battery half power output, 26V,28.8V Battery full power output
Size(light body)	605X315X15mm	605X605X25mm	1175X315X25mm
Size (control box)	144x68x217mm (studio live version) 144x85x272mm (professional version)		
Weight(light body)	1.48kg	3kg	3kg
Weight(control box)	1.3kg (studio live version) 1.85kg (professional version)		

FL200X Illuminance				
CCT	Distance Illuminance	1m	2m	3m
2700K	W/O softbox	6390Lux	1760Lux	820Lux
	W/ softbox	5040Lux	1340Lux	590Lux
3200K	W/O softbox	6670Lux	1840Lux	850Lux
	W/ softbox	5240Lux	1380Lux	610Lux

FL200LX Illuminance				
CCT	Distance Illuminance	1m	2m	3m
2700K	W/O softbox	5800Lux	1710Lux	810Lux
	W/ softbox	3970Lux	1180Lux	560Lux
3200K	W/O softbox	5980Lux	1770Lux	830Lux
	W/ softbox	4160Lux	1250Lux	580Lux

FL100X Illumination without softbox				
CCT Distance Illuminance	2700K	3200K	5600K	6500K
0.5m	14350Lux	14720Lux	16450Lux	16790Lux
1m	3460Lux	3570Lux	4050Lux	4210Lux

FL100X Illuminance with softbox				
0.5m	11180Lux	11580Lux	12980Lux	13270Lux
1m	2770Lux	2880Lux	3270Lux	3340Lux

■ FLAGLITE FL100C/FL200C/FL200LC

Elevate Your Studio
Or Workspace With
Dynamic RGB Effects




■ Product Specifications

Model	FL100C	FL200C	FL200LC
Power	110W	210W	210W
Beam angle	120°		
Color temperature	2700K-10000K		
CRI/TLCI	Average 95/Average 96		
Rf/Rg	Average 92/Average 100		
Working voltage	AC100V-240V,50/60Hz		
V-lock battery output	13~30V		
Battery compatibility	14.8V,16.8V 26V,28.8V Battery full power output	14.8V,16.8V Battery half power output, 26V,28.8V Battery full power output	14.8V,16.8V Battery half power output, 26V,28.8V Battery full power output
Size (light body)	605X315X15mm	605X605X25mm	1175X315X25mm
Size (control box)	144x85x272mm		
Weight	1.48kg(light body) 1.85kg(control box)	3kg(light body) 1.85kg(control box)	3kg(light body) 1.85kg(control box)

FL100C Illuminance							
CCT Dista- nce Illumi- nance	2700K	3200K	5600K	10000K	R (Red light)	G (Green light)	B (Blue light)
0.5m	13370Lux	13900Lux	16870Lux	18100Lux	2300Lux	4190Lux	700Lux
1m	4000Lux	4170Lux	5080Lux	5515Lux	625Lux	1240Lux	230Lux

FL200C Illuminance							
CCT Dista- nce Illumi- nance	2700K	3200K	5600K	10000K	R (Red light)	G (Green light)	B (Blue light)
1m	6250Lux	6550Lux	7760Lux	8350Lux	1020Lux	2140Lux	410Lux
2m	1750Lux	1810Lux	2150Lux	2330Lux	290Lux	600Lux	120Lux

FL200LC Illuminance							
CCT Dista- nce Illumi- nance	2700K	3200K	5600K	10000K	R (Red light)	G (Green light)	B (Blue light)
1m	5750Lux	6050Lux	7260Lux	7950Lux	940Lux	1990Lux	370Lux
2m	1700Lux	1790Lux	2090Lux	2290Lux	280Lux	590Lux	110Lux

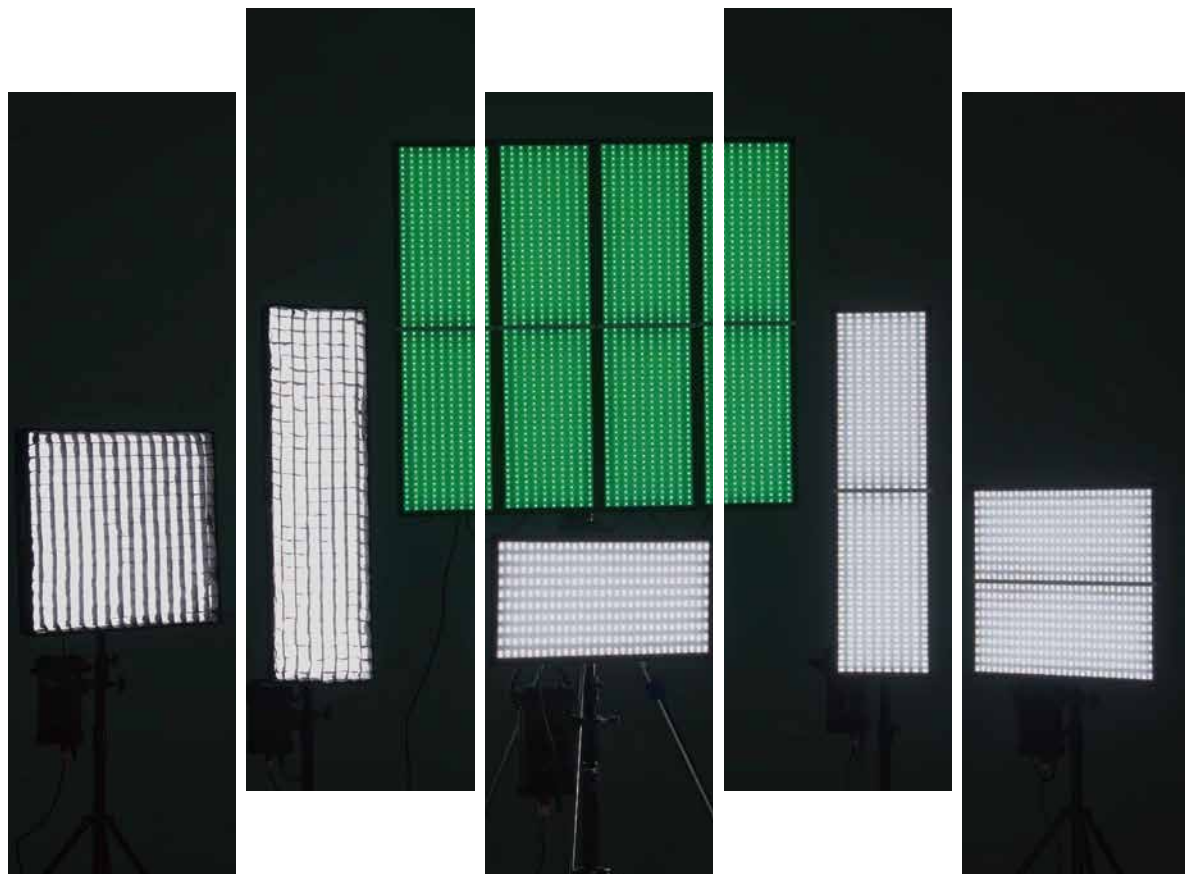

Optional Accessories



【Splicing bracket】



【Bracket】



【DMX cable】



【Remote control】

Package including

- Light
- Bag
- AC Power cord
- Double-female stand mount adapter
- Adapter plate
- Softbox
- Pipe clamp
- Control box
- Extension cable





flaglite



■ VELALITE W40X/W40C

Ultra Wide Angle Curved Light

- Curved Shape
- Bright and Soft
- Small and Lightweight
- Wide Angle Light Beam

■ Product Specifications

Model	W40C	W40X
Power	45W max	
Beam angle	190°	
Color temperature	2700K-10000K	2700K-65000K
CRI	Average 95	Average 96
TLCI	Average 96	Average 98
Rf	Average 92	Average 94
Rg	Average 100	Average 103
Working voltage	AC100V-240V,50/60Hz PD2.0 or above/DC 15V/3.2A DC(Battery) 7.4V x 2	
Remote control charging input voltage	DC5V	
Size	305X180X90mm	
Weight	800g	
Octopus tripod weight	140g	

W40C Illuminance								
CCT Illuminance Distance	2700K	3200K	5600K	6500K	10000K	Red	Green	Blue
0.5m	2684Lux	2938Lux	3282Lux	3373Lux	3551Lux	483Lux	1530Lux	301Lux
1m	766Lux	837Lux	936Lux	962Lux	1026Lux	139Lux	430Lux	84Lux
2m	209Lux	228Lux	255Lux	262Lux	278Lux	37Lux	119Lux	22Lux
3m	101Lux	110Lux	123Lux	126Lux	134Lux	19Lux	57Lux	11Lux

W40X Illuminance				
CCT Illuminance Distance	2700K	3200K	5600K	6500K
0.5m	2300Lux	2385Lux	2620Lux	2510Lux
1m	640Lux	660Lux	720Lux	690Lux
2m	172Lux	185Lux	195Lux	186Lux
3m	80Lux	83Lux	90Lux	87Lux

Creative Splicing

Single Light Turns into a Group of Lights in a Second

90W	180W	360W	675W
dual lights	4 lights	8 lights	15 lights



■ VELALITE W220c W220x

Full Color Wide-Angle Curved Shape

230W




230W
constant power


240°
luminous surface


36 million
RGB colors


Full color
gamut adjustable

■ Product Specifications

Model	W220C	W220X
Power	230W	
Beam angle	160°	
Color temperature	2700K-10000K	2700K-6500K
CRI	Average 95	Average 96
TLCI	Average 97	Average 98
Rf	Average 92	Average 94
Rg	Average 101	Average 102
Working voltage	AC100V-240V,50/60Hz	
V-lock battery output	13~30V	
Battery compatibility	14.8V,16.8V Battery half power output 26V,28.8V Battery full power output	
Size	510X235X320mm	
Weight	6kg	
Weight(Ball head bracket)	1kg	

W220C Illuminance								
Distance CCT Illuminance	2700K	3200K	5600K	10000K	R (Red light)	G (Green light)	B (Blue light)	
1m	3802Lux	3981Lux	4472Lux	5026Lux	624Lux	1378Lux	258Lux	
2m	1078Lux	1128Lux	1274Lux	1420Lux	178Lux	391Lux	75Lux	
3m	508Lux	530Lux	599Lux	666Lux	84Lux	185Lux	36Lux	
4m	296Lux	310Lux	351Lux	392Lux	51Lux	109Lux	22Lux	

W220X Illuminance						
Distance CCT Illuminance	2700K	3200K	4400K	5600K	6500K	
1m	3774Lux	3944Lux	4203Lux	4479Lux	4615Lux	
2m	1076Lux	1126Lux	1205Lux	1275Lux	1304Lux	
3m	505Lux	528Lux	566Lux	598Lux	610Lux	
4m	296Lux	311Lux	333Lux	351Lux	361Lux	

VICTORSOFT

V-2000ASVL/V-4000ASVL/V-6000ASVL



Product Specifications

Model	V-2000ASVL	V-4000ASVL
Power	100W	200W
Illuminance	2565Lux/m, 685Lux/2m	4695Lux/m, 1425Lux/2m
Color temperature	3200K(±150K)~5600K(±300K)	
Voltage	AC100V-240V, DC24V-30V	
Size	45x55x9cm	70x55x9cm
Weight	6.4kg	9.09kg
Accessories	Barndoor, AC power adapter, Power cord, DMX cable, Safety cable	



Model	V-6000ASVL
Power	300W
Illuminance	7430Lux/m, 2185Lux/2m
Color temperature	3200K(±150K)~5600K(±300K)
Voltage	AC100V-240V, DC24V-30V
Size	38x117.5x15cm
Weight	15.27kg
Accessories	Barndoor, AC power adapter, Power cord, DMX cable, Safety cable



HUESCAPE

HS-120/HS-300/HS-600/HS-600S

Product Specifications

Model	HS-120
LED diffusion	Lishuai Huescape Technology
Front diffuser panel	48x25cm
Beam angle	120°
Color temperature	2800K(±100K)-10000K(±100K)
CRI	95~98
TLCI	95~97
Remote control	DMX 512,Remote control, Mobile APP
Voltage	AC100-240V, 50/60HZ, DC15V
Power	120W max
Battery mount	V-lock plate
Battery voltage	DC12-17V
Battery mode power output	0-80%
Working temperature	-4 to 113° F (-20 to 45°C)
Protection level	IP20
LED lifetime	Up to 50,000 hours
Weight	14.3lbs(6.47kg)without adapter 15.8lbs(7.17kg)with adapter
Dimensions	26.4in x 18.7in x 3.1in(67x47.5x8cm)



■ Product Specifications

Model	HS-300
LED diffusion	Lishuai Huescape Technology
Front diffuser panel	30x60cm
Beam angle	120°
Color temperature	2800K(±200K)-10000K(±200K)
CRI	≥95
TLCI	≥91
Remote control	DMX 512,Remote control, Mobile APP
Voltage	AC100-240V, 50/60HZ, DC30V
Power	320W max
Battery mount	V-lock plate
Battery voltage	DC24-36V
Battery mode power output	0-80%
Working temperature	-4 to 113° F (-20 to 45°C)
Protection level	IP20
LED lifetime	Up to 50,000 hours
Weight	38.6lbs(17.5kg)
Dimensions	28.4in x 20.4in x 7.2in(72x51.8x18.2cm)



■ Product Specifications

Model	HS-600S	HS-600
LED diffusion	Lishuai Huescape Technology	
Front diffuser panel	42x75cm	30x130cm
Beam angle	120°	
Color temperature	2800K(±200K)-10000K(±200K)	
CRI	≥95	
TLCI	≥91	
Remote control	DMX 512,Remote control, Mobile APP	
Voltage	AC100-240V, 50/60HZ, DC48V	
Power	600W max	
Working temperature	-4 to 113° F (-20 to 45°C)	
Protection level	IP20	
LED lifetime	Up to 50,000 hours	
Weight	47.6lbs(21.6kg)	57.3lbs(26kg)
Dimensions	36.2in x 21.5in x 7.2in (92x54.4x18.2cm)	57.9in x 20.4in x 7.2in (147x51.8x18.2cm)



■ COOLCAM T50C

Versatile Fill Light for Visual Creators

45cm
Compact and stylish

3-Second
quick installation
light barndoor

20W
efficient power

Versatile
light control accessories

Millions of colors
RGB version



■ Product Specifications

Model	T50C
Power	20W
Color temperature	2700K-7500K
Dimming range	0%~100%
CRI	Average 95
TLCI	Average 96
Rf	Average 92
Rg	Average 100
Working voltage	DC6.4V~8.4V
Built-in lithium battery	7.4V $\approx$ 2600mAh
Working Environment temperature	-10°~+40°
Battery life (100%output, 5600K)	About 50 minutes
Charging time	About 85 minutes (12V-2A)
Size	ϕ 46mm*456mm
Weight(light body)	About 453g
Weight of barndoor	About 190g

T50C Illuminance					
CCT	Distance Illuminance	0.5m	1m	1.5m	2m
2700K	W/O accessory	4912Lux	1410Lux	667Lux	372Lux
	With white diffuser	1459Lux	382Lux	172Lux	100Lux
3200K	W/O accessory	5065Lux	1452Lux	673Lux	382Lux
	With white diffuser	1509Lux	395Lux	179Lux	103Lux
4400K	W/O accessory	5324Lux	1514Lux	697Lux	399Lux
	With white diffuser	1583Lux	414Lux	188Lux	108Lux
5600K	W/O accessory	5438Lux	1561Lux	719Lux	411Lux
	With white diffuser	1638Lux	429Lux	195Lux	111Lux
6500K	W/O accessory	5576Lux	1602Lux	736Lux	417Lux
	With white diffuser	1684Lux	435Lux	200Lux	114Lux
7500K	W/O accessory	5698Lux	1635Lux	750Lux	426Lux
	With white diffuser	1724Lux	445Lux	204Lux	116Lux
R (Red light)	W/O accessory	1184Lux	340Lux	153Lux	90Lux
	With white diffuser	362Lux	88Lux	46Lux	24Lux
G (Green light)	W/O accessory	2710Lux	792Lux	355Lux	210Lux
	With white diffuser	815Lux	209Lux	95Lux	54Lux
B (Blue light)	W/O accessory	689Lux	206Lux	93Lux	52Lux
	With white diffuser	215Lux	53Lux	25Lux	14Lux

Virtual Reality Light Painting Synchronization

RGB Full-Color Tube Light

6W/20W/40W

HS-T120

- Multi light linkage, as free as flowing water
- Different sizes, brainstorming
- 16/32 pixel dot matrix control

HS-T60

HS-T25

Product Specifications

Model	HS-T25	HS-T60	HS-T120
Power	6W	20W	40W
Working voltage	3.7V	DC24V	DC24V
Working duration	70min	120min	120min
Battery	2500mAh	2500mAh	5000mAh
Size	250Xφ44mm	621Xφ44mm	1191Xφ44mm
Weight	260g	750g	1350g
Dimming range	0-100%		
Color temperature	2600K-7500K		
CRI	≥95		
TLCI	≥97		
LEDs	Cold white+Warm white+RGB		
Charging time	About 3.5h		

RGB-T25 Illuminance					
CCT Distance Illuminance	2800K	7500K	Red light	Green light	Blue light
0.3m	1133Lux	1540Lux	58Lux	161Lux	37Lux
1m	118Lux	159Lux	6Lux	16Lux	4Lux

RGB-T60 II Illuminance							
CCT Distance Illuminance	2600K	3200K	4400K	5600K	Red light	Green light	Blue light
0.5m	1077Lux	1138Lux	1224Lux	1309Lux	433Lux	946Lux	205Lux
1m	324Lux	341Lux	364Lux	384Lux	130Lux	279Lux	62Lux

RGB-T120 II Illuminance							
CCT Distance Illuminance	2600K	3200K	4400K	5600K	Red light	Green light	Blue light
0.5m	1455Lux	1516Lux	1653Lux	1722Lux	540Lux	1257Lux	255Lux
1m	550Lux	582Lux	621Lux	653Lux	202Lux	469Lux	95Lux



Light stand

LS-250T



242cm 84cm 73.5cm 1.7kg 3kg

LS-260F



260cm 110cm 110cm 3.8kg 6kg

LS-280T



280cm 96cm 84cm 1.8kg 3kg

C stand C-328



328cm 145cm 145cm 7.5kg 10kg

Pipe clamp

CA120



Dimension	140x70x43mm
Weight	0.23kg
Loading weight	30kg
Pipe diameter	20mm-35mm
V mount	with 1 pc

CA121



Dimension	145x147x43mm
Weight	0.45kg
Loading weight	30kg
Pipe diameter	20mm-35mm
Threaded hole	1/4 and 3/8
V moun	with 2 pcs

CA129



Dimension	240x136x88mm
Weight	1.05kg
Loading weight	12kg
Pipe diameter	10mm-35mm

Bag & case

