



Add:NO.55 East Zhenxing Road,Yuyao City,Zhejiang Province,China
Tel:+86-574-62763333/62636368 Fax:+86-574-62636398
Email:ls@lishuai.com.cn Http:www.lishuai-lighting.com

PRODUCT CATALOGUE
2023/2024



Yuyao Lishuai Film and Television Equipment Co., Ltd. was founded in 2002. It is a comprehensive lighting solution provider integrating R&D, production, sales and service with film and television and photography lamps as the core.

Lishuai Film and Television specializes in the field of film and photographic lighting, with a strong focus on product innovation and development. Its business segments include LED Monolights, flat panel lights, full-color video lights, portable video lights, and lighting accessories. The company is committed to continuously improving its product design, and reinforces its investment in Research & Development, to ensure that its customers receive the highest-quality and most reliable lighting solutions.

Lishuai Film and Television creates a beautiful world of light and shadow.



01

FOCUS SERIES

FOCUS 2000Xpro	05
FOCUS 1000Dpro	09
FOCUS 1000Xpro	13
FOCUS 600Xpro/600Dpro	17
FOCUS 300Xpro	19
FOCUS 300D/300X	21
FOCUS 150X/200D II	23
FOCUS 50D	25

02

COOLCAM SERIES

COOLCAM 600X/600D	29
COOLCAM 300D/300X	31
COOLCAM 200D/200X	33
COOLCAM 120X	35
COOLCAM P60/P120	37
COOLCAM RGB516/LED516AS	39

03

HUESCAPE SERIES

HUESCAPE HS-1360	43
HUESCAPE HS-600S/HS-600	47
HUESCAPE HS-120/HS-150/HS-300	49
C200/C400	51
P-1380ASVL /P-1580ASVL /P-2400ASVL	53
C-300RS/C-700RSV/C-1500RSV	55

04

FIND SERIES

FIND HS-T25/HS-T60/HS-T120	59
FIND HS-T2X/HS-T4X	61
FIND HS-P12/HS-P10	63
FIND A8	65
FIND W5/W10	67

05

FLAGLITE SERIES

FLAGLITE FL50BI/FL70BI	71
FLAGLITE FL150/ FL150L/FL-Q1500R	73

06

VICTORSOFT SERIES

VICTORSOFT V-2000ASVL/V-4000ASVL/V-6000ASVL	77
VICTORSOFT VR-1200ASVL/VR-2500ASVL	79

07

LIGHTING ACCESSORIES

01 FOCUS SERIES

“

Every Watt is a Powerful
Productivity



“

Born Strong, Made for Film
FOCUS 2000X PRO

”

1000W

Ultra bright and Bi-color LED Monolight



Ultra high brightness output



Rainproof



Deep thousand level dimming



Wired and Wireless DMX



Lumenradio CRMX



Lishuai APP



Product Specifications

Model	2000X pro
Power	1000W max
Beam angle	90°
Color temperature	2700K(±200K)-6500K(±300K)
CRI	≥95
TLCI	≥96
Dimming range	0-100.0%
Working voltage	AC100-240V,DC48-60V
Heat dissipation system	Heat pipe radiator, temperature controlled fan (automatic control fan)
Light body size (with stand adapter)	313x352x498mm
Weight	7.25kg (Lamp body) 7.7kg (Control Box)

2000X pro Light without reflector						
Distance	CCT	2700K	3200K	4400K	5600K	6500K
	Illumination					
3m		3586Lux	4023Lux	4684Lux	4910Lux	4913Lux
5m		1350Lux	1517Lux	1756Lux	1844Lux	1845Lux
2000X pro with 10° reflector						
3m		41879Lux	47333Lux	53889Lux	57077Lux	56735Lux
5m		14210Lux	16106Lux	18350Lux	19666Lux	19393Lux
2000X pro with 25° reflector						
3m		22735Lux	25751Lux	29929Lux	31278Lux	31149Lux
5m		7474Lux	8470Lux	9789Lux	10331Lux	10340Lux
2000X pro with 45° reflector						
3m		6750Lux	7633Lux	8832Lux	9283Lux	9282Lux
5m		2359Lux	2648Lux	3062Lux	3212Lux	3192Lux

FOCUS 2000X PRO





A Shining Star FOCUS 1000D PRO




- **Super Bright**
1000W high brightness COB, imported original high-power light source, with brightness comparable to 1.8K traditional HMI light
- **Ultra-Hardcore**
High strength rainproof grade, light body and controller unaffected by heavy rain spray and can easily cope with -20°C-45°C temperatures
- **Super Control**
Lishuai Wireless APP Control, Wireless DMX Control, Wired DMX Control, LumenRadio CRMX control
- **Super Depth**
0-100% ultra deep light control technology, precise control of brightness limits
- **Super Smooth**
Smooth and uniform 0-100% dimming with minimal light decay $\leq 1\%$ within 6000 hours, significantly exceeding industry standards.
- **Super Quiet**
NOCTUA cooling fan with built-in NTC temperature self-checks, ensuring automatic fan speed control for silent and efficient cooling.
- **Super Color Rendering**
CRI ≥ 95 , TLCI ≥ 95 , restore true color representation



Product Specifications

Model	1000D pro
Power	1000W
Beam angle	90°
Color temperature	5600K(±300K)
CRI	≥96
TLCI	≥96
Dimming range	0-100%
Working voltage	AC100-240V,DC48-60V
Heat dissipation system	Heat pipe radiator, temperature controlled fan (automatic control fan)
Light body size (without bracket)	313x219x210mm
Weight	7.25kg (Lamp body) 7.7kg (control box)

1000D pro Illumination				
Distance	Light without reflector	with 45°reflector	with 10°reflector	with 25°reflector
2m	14727Lux	26453Lux	—	88225Lux
3m	6592Lux	11118Lux	63998Lux	37104Lux
5m	2455Lux	3864Lux	22508Lux	12336Lux
7m	1300Lux	1989Lux	11367Lux	6152Lux
9m	849Lux	1274Lux	6867Lux	3711Lux

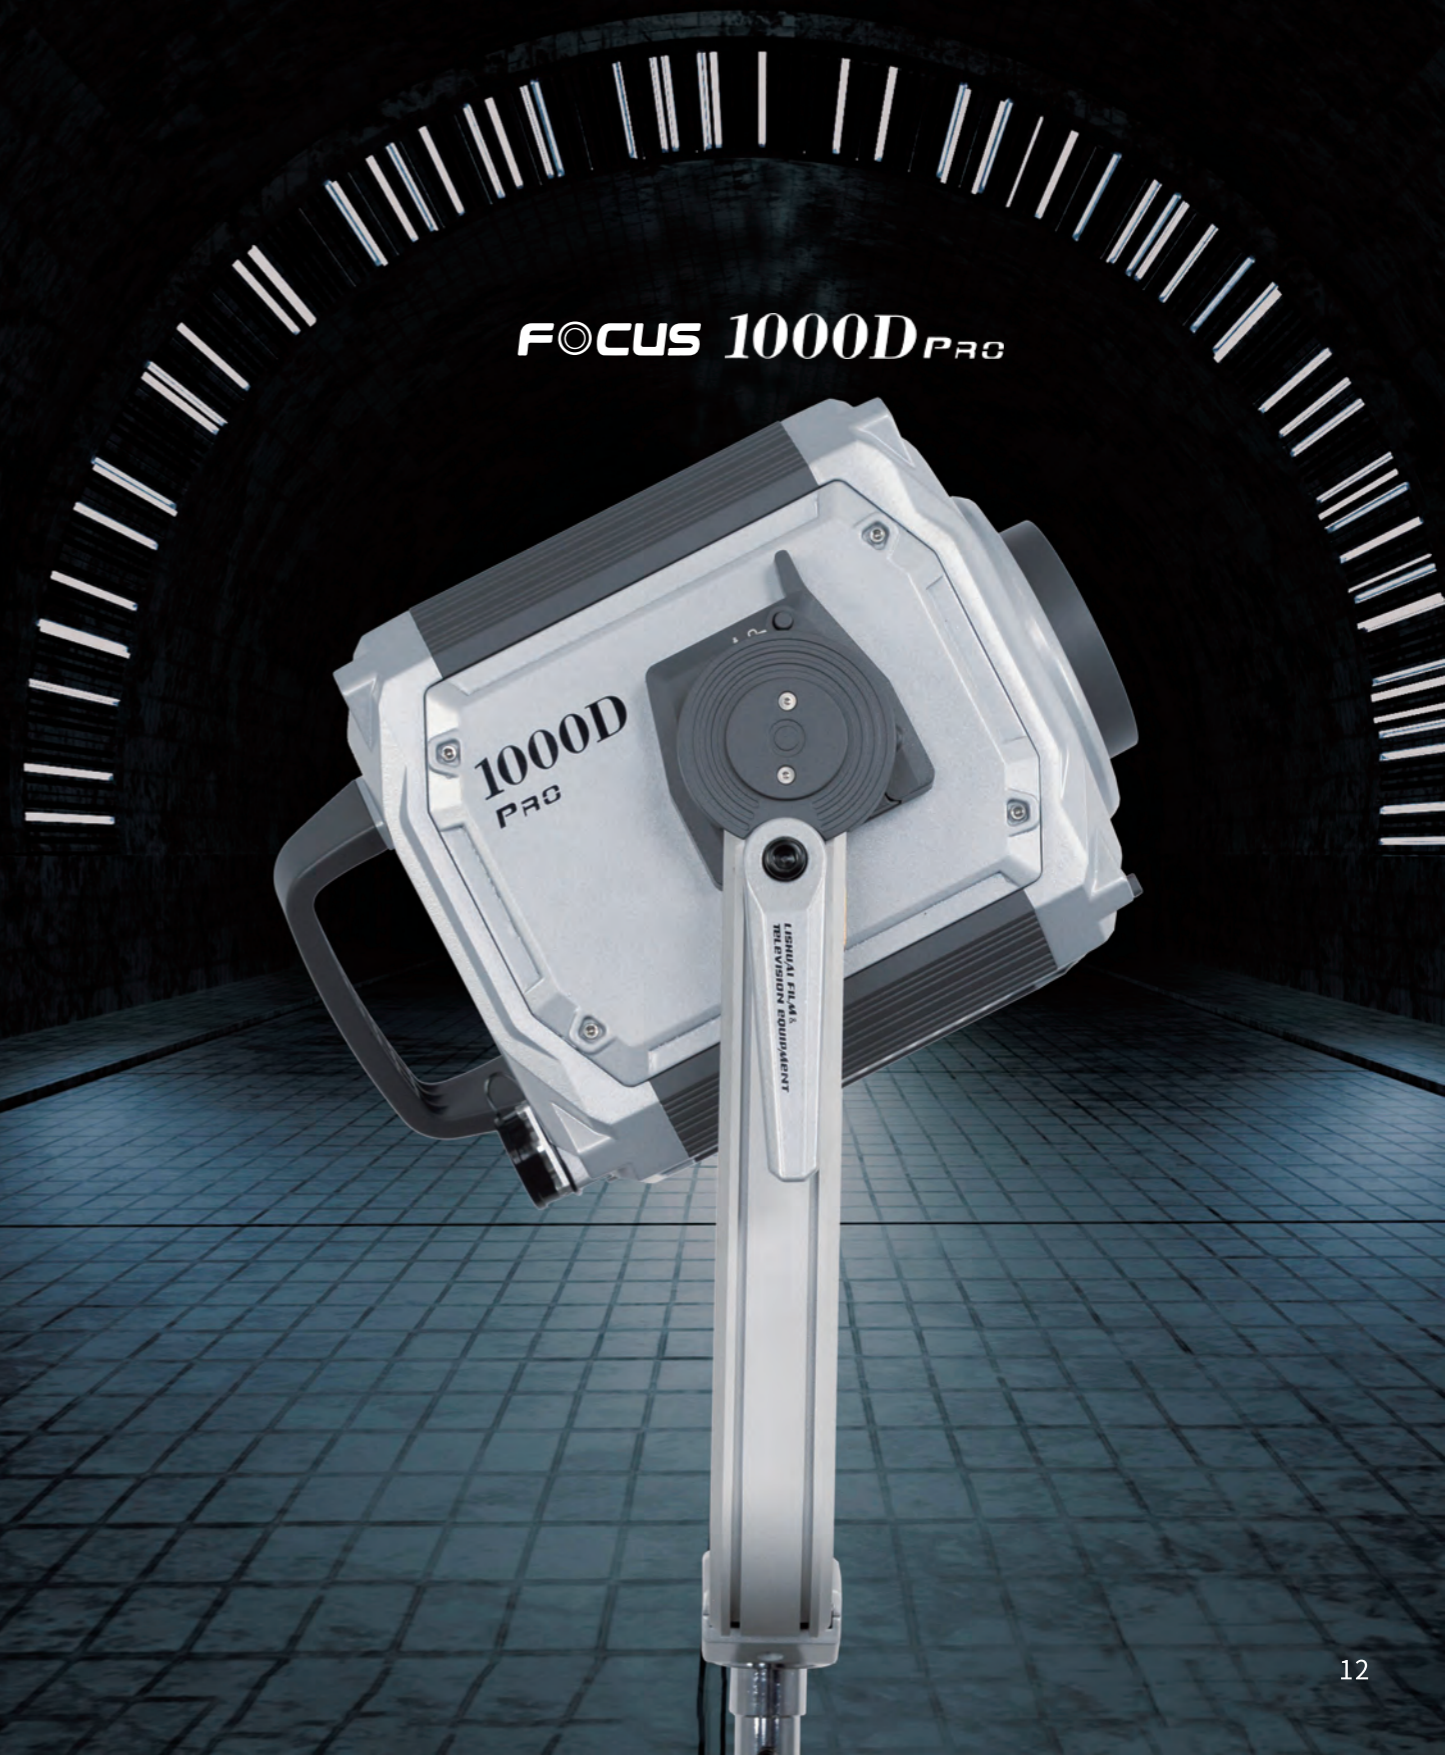

“Your Partner for
Visual Exploration”

Dual color temperature 2700K-6500K **680W**

FOCUS 1000X_{PRO}



680W high
brightness COB



High strength
rainproof



Lishuai Wireless
APP Control



High strength
rainproof



NOCTUA brand
cooling fan



Super color rendering
to restore true colors



One light has
multiple functions



Wireless
DMX control



Product Specifications

Model	1000X pro
Power	680W max
Beam angle	120°
Color temperature	2700K(±200K)-6500K(±300K)
CRI	≥95
TLCI	≥96
Dimming range	0-100%
Working voltage	AC100-240V,DC36-48V
Heat dissipation system	Heat pipe radiator, temperature controlled fan (automatic control fan)
Light body size	263x307x426mm
Weight	5.49kg (Lamp body) 8.3kg (Control Box)

1000X pro Light without reflector						
Distance	CCT	2700K	3200K	4400K	5600K	6500K
	1m	Illumination	12258Lux	16641Lux	18389Lux	18830Lux
3m		1669Lux	2199Lux	2463Lux	2543Lux	2222Lux
1000X pro Illumination with reflector						
1m		146900Lux	197000Lux	224500Lux	230000Lux	197800Lux
3m		9349Lux	12412Lux	13751Lux	14386Lux	12744Lux

FOCUS 1000X_{PRO}



Product Specifications

Model	600X pro	600D pro
Power	500W max	660W max
Color temperature	2700K(±200K)-6500K(±300K)	5600K(±300K)
CRI	≥95	≥96
TLCI	≥95	≥96
Beam angle	120°	
Dimming range	0-100%	
Working voltage	AC100-240V,DC36-48V	
Heat dissipation system	Heat pipe radiator, temperature controlled fan (automatic control fan)	
Light body size	263x307x426mm	
Weight	5.49kg (Lamp body) 8.3kg (Control Box)	

600X pro Light without reflector						
Distance	CCT	2700K	3200K	4400K	5600K	6500K
	Illumination					
1m		7302Lux	9638Lux	14381Lux	10183Lux	9108Lux
3m		1002Lux	1290Lux	1937Lux	1428Lux	1235Lux
600X pro Illumination with reflector						
1m		104500Lux	142800Lux	210600Lux	156300Lux	136000Lux
3m		6402Lux	8398Lux	12467Lux	9388Lux	8108Lux

600D pro Illumination		
Distance	Light without reflector	with reflector
1m	20500Lux	278000Lux
3m	2872Lux	16438Lux



Illuminate Your World

FOCUS 600X/600D PRO



Taiwan Original
High Power LED



High strength
rainproof



11 special effects
scene simulation



Light decay within
6000 hours ≤ 1%



FOCUS 600X PRO
Dual color temperature
2700K-6500K

FOCUS 600D PRO
Daylight LED Monolight
5600K

“Your Excellent Performer”

FOCUS 300X PRO



Product Specifications

Model	300X pro
Power	400W max
Beam angle	120°
Color temperature	2700K(±200K)-6500K(±300K)
CRI	≥96
TLCI	≥96
Dimming range	0-100%
Working voltage	AC100-240V,DC24-36V
Heat dissipation system	Heat pipe radiator, temperature controlled fan (automatic control fan)
Light body size (with stand adapter)	300x240x375mm
Weight	5kg (Lamp body) 3kg (Control Box)

300X pro Light without reflector						
Distance	CCT	2700K	3200K	4400K	5600K	6500K
	Illumination					
1m		4932Lux	6410Lux	9764Lux	6983Lux	6073Lux
2m		1311Lux	1712Lux	2569Lux	1866Lux	1627Lux
300X pro Illumination with reflector						
1m		22054Lux	28375Lux	44308Lux	31534Lux	27570Lux
2m		5048Lux	6552Lux	9967Lux	7330Lux	6385Lux

- **Design of integrated light control**
Exquisite, compact and convenient
- **Ultra deep dimming**
0-10% linear
- **Four optional control methods**
Wireless DMX/ Wired DMX/ 2.4G/ Lishuai APP
- **High intensity rainproof**
Rainstorm high temperature
- **High power dual color temperature**
200W cold light and 200W warm light



Product Specifications

Model	300D	300X
Color temperature	5600K(±200K)	2700K(±200K)-6500K(±200K)
Power	300W	
CRI	96-98	
TLCI	≥96	
Beam angle	120°	
Dimming range	0-100%	
Working voltage	AC100-240V,DC24-34V	
Heat dissipation system	Heat pipe radiator, temperature controlled fan (automatic control fan)	
Light body size	418x313x210mm	
Weight	3.41kg (Lamp body)	3.8kg (Control Box)

300D Illumination		
Distance	Light without reflector	with reflector
1m	11800Lux	37300Lux
2m	3163Lux	8869Lux

300X Light without reflector						
Distance	CCT	2700K	3200K	4400K	5600K	6500K
	Illumination					
1m		4610Lux	5715Lux	7453Lux	7137Lux	6036Lux
2m		1267Lux	1565Lux	2018Lux	1901Lux	1646Lux
300X Illumination with reflector						
1m		20313Lux	25800Lux	32000Lux	31618Lux	27261Lux
2m		4973Lux	6098Lux	8073Lux	7721Lux	6673Lux



Essential for Novice
Professional Creators



FOCUS 300D/300X

- High Brightness

Illumination up to 37300Lux/m

- Built-in Light Effect

Taiwan original COB, CRI≥96, with 11 special effects

- Lightweight

Effortlessly controllable by one person with its ultra-lightweight 3.41kg light body.





Small Body, Big power

FOCUS 150X/200D II



Integrated lighting control



MeanWell brand power adapter



All-metal body, lightweight and durable



11 kinds of scene effects simulation



0-100% stepless dimming



Standard Bowens mount



Product Specifications

Model	200D II	150X
Power	200W max	120W max
Color temperature	5600K(±200K)	2700(±200K)-6500K(±300K)
Beam angle	120°	
CRI	≥95	
TLCI	≥95	
Dimming range	0-100%	
Working voltage	AC100-240V,DC15-24V	
Heat dissipation system	Heat pipe radiator, temperature controlled fan (automatic control fan)	
Light body size (with stand adapter)	230x130x265mm	
Weight	2.7kg	

200D II Illumination		
Distance	Light without reflector	with reflector
1m	7102Lux	23487Lux
2m	1898Lux	5578Lux

150X Light without reflector						
Distance	CCT Illumination	2700K	3200K	4400K	5600K	6500K
		1m	1952Lux	2371Lux	3193Lux	2980Lux
2m	529Lux	642Lux	877Lux	807Lux	694Lux	

150X Illumination with reflector						
Distance	CCT Illumination	2700K	3200K	4400K	5600K	6500K
		1m	6600Lux	8094Lux	11192Lux	10298Lux
2m	1580Lux	1934Lux	2692Lux	2467Lux	2205Lux	



Ultra Mini Light

FOCUS 50D



Daylight LED Monolight 5600K



Ultra high color rendering professional light experience



0-100% stepless dimming



All metal forged, lightweight and durable



Dual power supply mode, more convenient

Product Specifications

Model	50D
Power	50W
Beam angle	120°
Color temperature	5600(±300K)
CRI	95-98
TLCI	≥95
Working duration	70min (with batteries)
Working voltage	AC100-240V,DC13-17V
Battery	4400mAh 7.4V
Light body size	245x100mm
Weight	1.58kg

50D Illumination		
Distance	Light without reflector	with reflector
1m	2227Lux	9714Lux
2m	591Lux	2191Lux
3m	277Lux	930Lux
5m	113Lux	337Lux



02
COOLCAM[®] SERIES

“

Experience the Emotions of
the Movie Like Never Before,
Right at Your Fingertips



Product Specifications

Model	600D	600X
Power	660W	500W max
Color temperature	5600(±300K)	2700(±200K)-6500K(±300K)
CRI	≥96	≥95
TLCI	≥96	≥97
Weight	5.49kg (Lamp body) 5kg (Control Box)	5.49kg (Lamp body) 3.85kg (Control Box)
Beam angle	120°	
Scene effect	Support(11)	
Working voltage	AC100-240V,DC36-48V	
Light control	Lishuai APP/ DMX 512/2.4G Remote control	
Size	263x307x426mm (Lamp body)	325x185x212mm (Control Box)

600X Light without reflector						
Distance	CCT	2700K	3200K	4400K	5600K	6500K
	2m	Illumination	2923Lux	3490Lux	4105Lux	4215Lux
5m		510Lux	615Lux	723Lux	742Lux	692Lux
600X Illumination with reflector						
2m		21371Lux	26324Lux	31766Lux	31762Lux	29783Lux
5m		2716Lux	3407Lux	4022Lux	4017Lux	3766Lux

600D Illumination		
Distance	Light without reflector	with reflector
1m	21300Lux	298800Lux
3m	2998Lux	16967Lux



One Light Breaks All Limits

COOLCAM 600D/600X



Film-grade professional light experience



High brightness, essential for large scenes



Surging output capability



Intelligent multi-light control



Product Specifications

Model	300D	300X
Power	310W	310W max
Color temperature	5600K(±300K)	2700(±200K)-6500K(±300K)
CRI	≥96	≥95
TLCI	≥97	≥96
Beam angle	120°	
Working voltage	AC100-240V,DC48V	
Scenario mode	Support (11)	
Heat dissipation system	Heat pipe radiator, temperature controlled fan (automatic control fan)	
Light body size (with stand adapter)	290x132x240mm	
Weight	2.75kg (Lamp body)	1.1kg (AC power adapter)

300X Light without reflector						
Distance	CCT	2700K	3200K	4400K	5600K	6500K
	Illumination					
1m		6546Lux	8187Lux	9087Lux	9968Lux	9351Lux
3m		771Lux	965Lux	1074Lux	1171Lux	1102Lux
300X Illumination with reflector						
1m		42823Lux	53512Lux	60221Lux	65185Lux	60916Lux
3m		2675Lux	3344Lux	3743Lux	4069Lux	3851Lux

300D Illumination		
Distance	Light without reflector	with reflector
1m	11059Lux	71493Lux
3m	1281Lux	4431Lux



An Essential for Movie-Grade Live Streaming Rooms



COOLCAM 300X
Dual color temperature
2700K-6500K

- Film-grade professional light experience
- Full scene application of live video
- Intelligent multi-light control
- Surging output capability



COOLCAM 300D
Daylight 5600K

Product Specifications

Model	200D	200X
Power	220W	220W max
Color temperature	5600K(±300K)	2700(±150K)-6500K(±300K)
CRI	≥96	≥95
TLCI	≥97	
Beam angle	120°	
Dimming range	0-100%	
Working voltage	AC200-240V,DC48V	
Scenario mode	Support (11)	
Light body size (with stand adapter)	235x132x240mm	
Weight	2.34kg	

200X Light without reflector						
Distance	CCT	2700K	3200K	4400K	5600K	6500K
	1m	Illumination	4164Lux	5287Lux	5941Lux	5787Lux
2m		1081Lux	1368Lux	1579Lux	1541Lux	1333Lux
200X Illumination with reflector						
1m		27053Lux	37888Lux	41102Lux	41499Lux	35692Lux
2m		4714Lux	6089Lux	6937Lux	7027Lux	6047Lux

200D Illumination		
Distance	Light without reflector	with reflector
1m	7456Lux	52757Lux
3m	880Lux	3243Lux

Redefine Studio Lighting

COOLCAM 200D / 200X



220W high power



11 special effects



Stylish appearance



COOLCAM 200D
Daylight LED Monolight
5600K

COOLCAM 200X
Dual color temperature
2700K-6500K

“

Small and Exquisite
Excellent Entry Level

”

COOLCAM 120X

Dual color temperature 2700K-6500K

146W

■ Product Specifications

Model	120X
Power	146W max
Beam angle	120°
Color temperature	2700(±200K)-6500K(±300K)
CRI	≥95
TLCI	≥97
Dimming range	0-100%
Working voltage	AC100-240V,DC48V
Scenario mode	Support (11)
Light body size (with stand adapter)	235x132x240mm
Weight	2.34kg





120X Light without reflector						
Distance	CCT	2700K	3200K	4400K	5600K	6500K
	Illumination					
1m		3259Lux	4191Lux	4636Lux	4377Lux	3724Lux
2m		844Lux	1085Lux	1212Lux	1125Lux	968Lux
120X Illumination with reflector						
1m		21991Lux	27653Lux	31474Lux	29471Lux	25289Lux
2m		3629Lux	4586Lux	5214Lux	4870Lux	4176Lux

Product Specifications

Model	P60	P120
Power	60W	120W
Size	360x413x79mm	600x413x79mm
Weight	4.2kg	5.8kg
Beam angle	120°	
Color temperature	2700(±150K)-6500K(±300K)	
CRI	≥95	
TLCI	≥97	
Working voltage	AC100-240V,DC15V	
Light control mode	Lishuai APP/ DMX 512/2.4G Remote control	
Scenario mode	Support (11)	

P60 Illumination						
Distance	CCT	2700K	3200K	4400K	5600K	6500K
	Illumination					
1m		1753Lux	1904Lux	1987Lux	2063Lux	1970Lux
2m		481Lux	517Lux	543Lux	562Lux	543Lux

P120 Illumination						
Distance	CCT	2700K	3200K	4400K	5600K	6500K
	Illumination					
1m		3542Lux	3650Lux	3702Lux	3890Lux	3704Lux
2m		980Lux	1004Lux	1035Lux	1088Lux	1044Lux



Professional Lighting
and Easy Operation



COOLCAM P60 / P120

Dual color temperature 2700K-6500K



COOLCAM P120
120W

COOLCAM P60
60W


Product Specifications

Model	RGB516	LED516AS
Power	18W	15W
Dimming range	0-100%	10-100%
Size	594.5mmxφ55mm	553mmxφ55mm
Weight	885g	950g
Charging time	About 1.5h	About 5h
Color temperature	2700K(±200K)-6500K(±200K)	
CRI	≥95	
TLCI	≥97	
Built-in battery	5200mAh 7.4V	
Battery working duration	100% About 2 hours at 100% power	

RGB516 Illumination						
Distance	CCT	2700K	6500K	R(Red Light)	G(Green light)	B(Blue Light)
	Illumination					
0.5m		2856Lux	3524Lux	400Lux	1017Lux	186Lux
1m		884Lux	1085Lux	110Lux	286Lux	50Lux
2m		240Lux	296Lux	30Lux	76Lux	13Lux

COOLCAM RGB516

Full color soft light handheld tube light

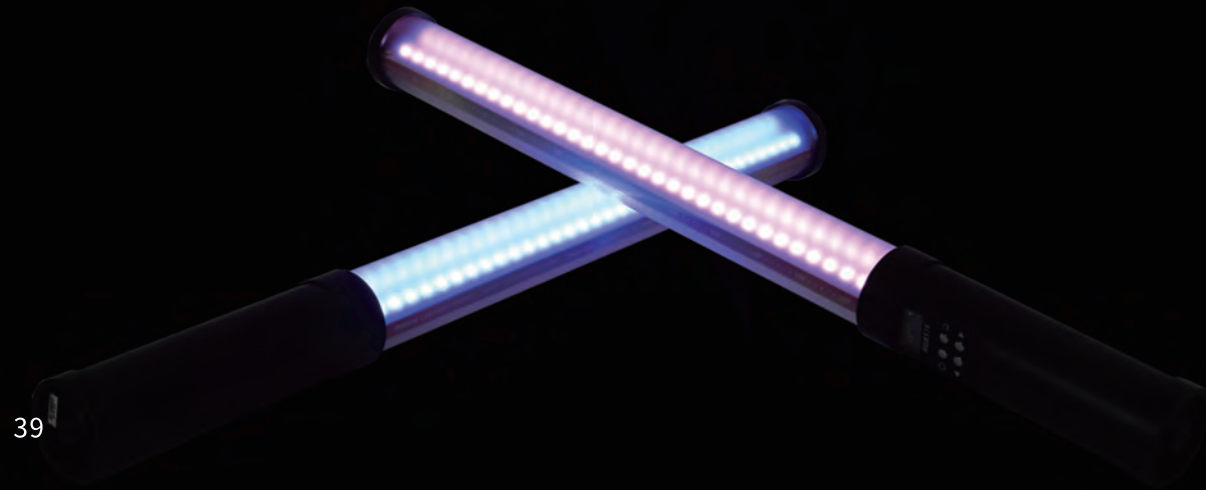

Dynamic Lighting for Our Creative Space - Essential for Creators



- One light multiple functions
- Mobile studio
- Handheld or light stand support




COOLCAM LED516AS

Dual color temperature
3200K-5600K

03 HUESCAPE SERIES



Experience the Era of Soft Lighting - Enhance Your Visual Experience with Vivid, Full-Color Illumination

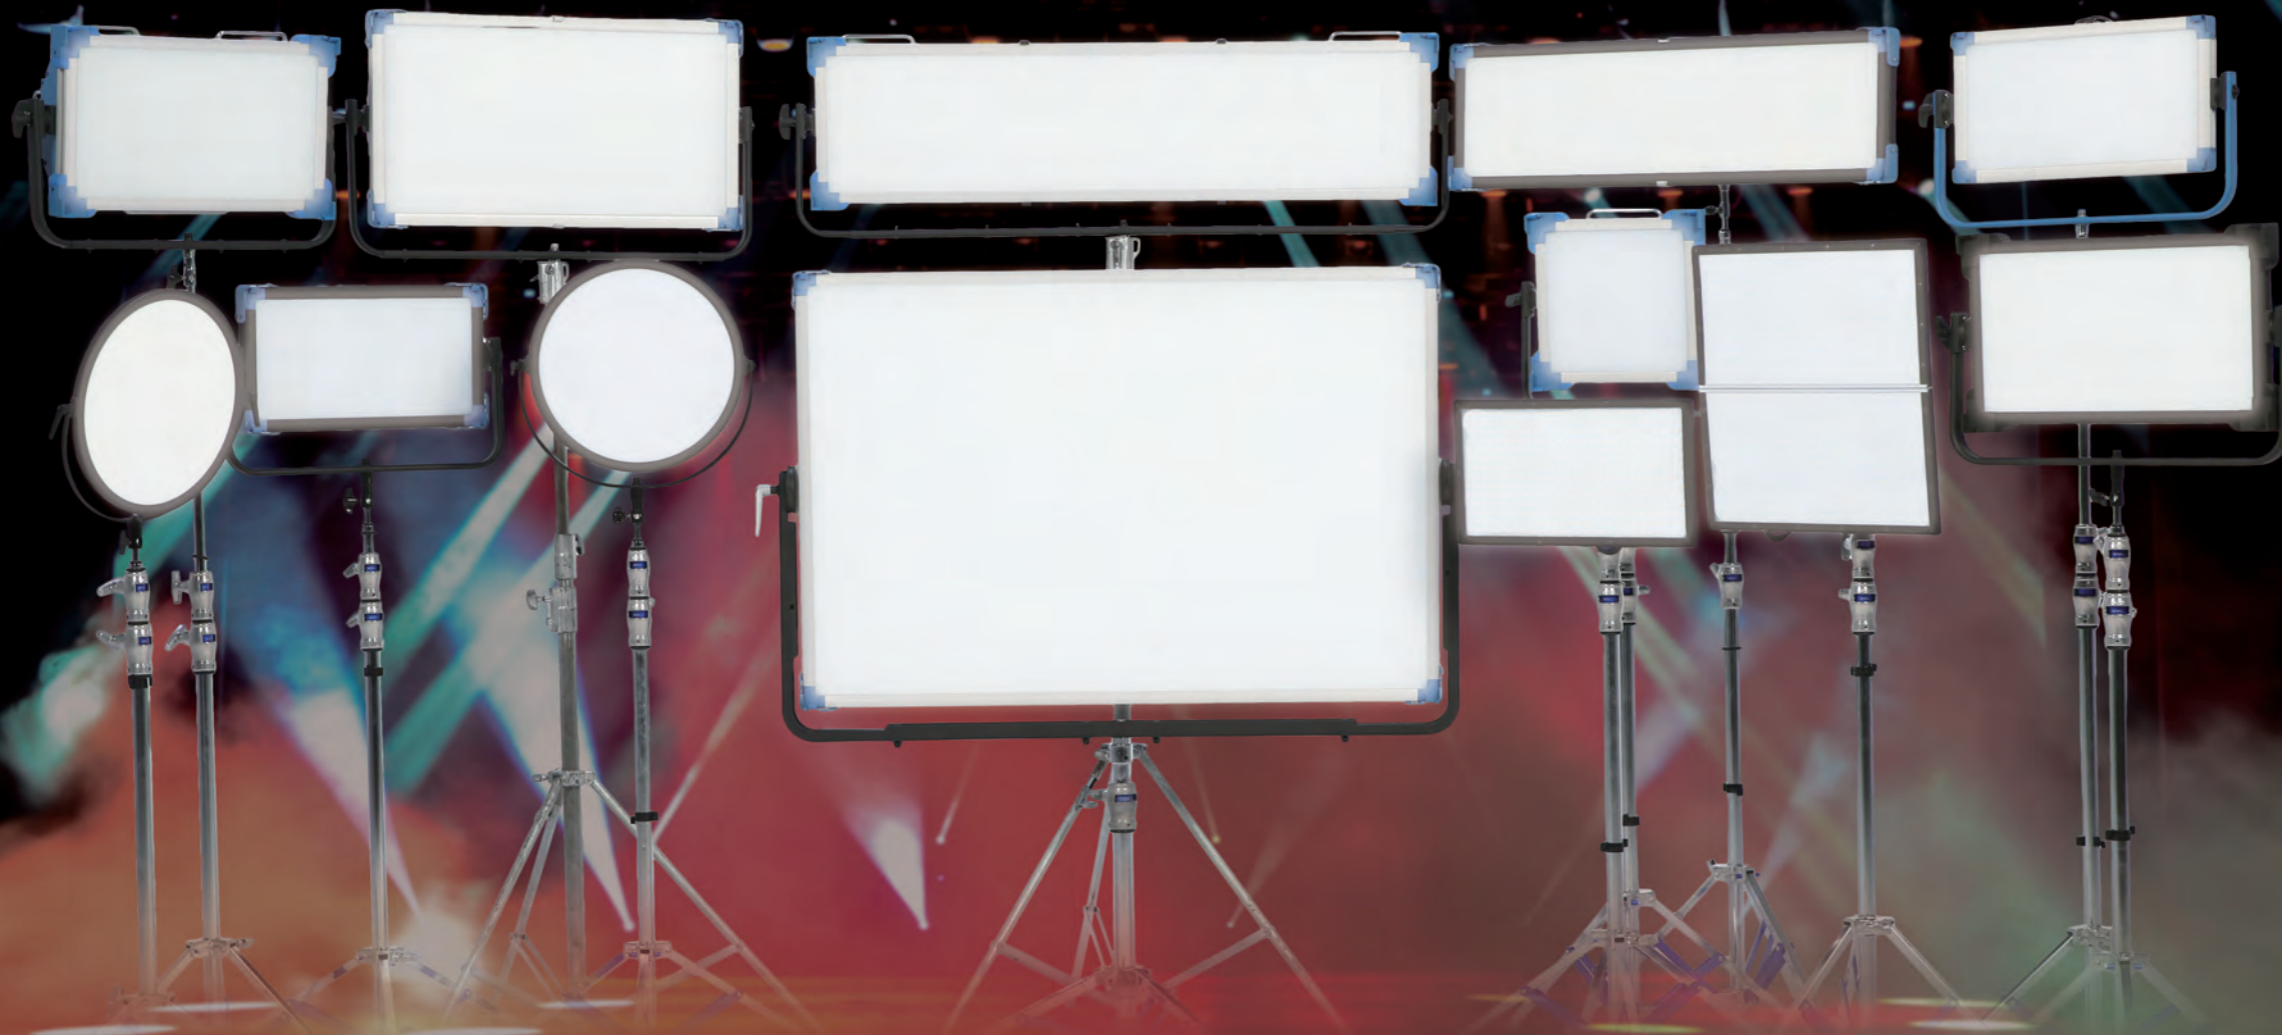

“

1 light > 12 lights
One screen with 12 zones

”

[Ultra High Power] [Split Screen and Control] [Soft Light and Full Color]

1400W

12

RGBW



HUESCAPE HS-1360

Professional RGB Full Color Panel Light





Product Specifications

Model	HS-1360
Power	1400W max
White light	2800K-10000K continuously adjustable
Color light	Full RGB+white gamut with hue saturation control
Beam angle	120°
CRI	≥95
TLCI	≥91
Dimming range	0-100%
Power output	AC100-240V
Light emission surface	870x1300mm
Remote control	DMX, Remote control, Lishuai APP
Weight	65kg

Distance	CCT Illumination	2800K	3200K	5600K	10000K
	1m		29370Lux	30120Lux	34080Lux
2m		10410Lux	10680Lux	11220Lux	11880Lux
5m		2220Lux	2290Lux	2410Lux	2510Lux
10m		500Lux	520Lux	540Lux	570Lux

2800K-10000K
Adjustable color temperature

RGBW full color
panel light

Innovative split
screen breakthrough

Outstanding
soft panel light



Product Specifications

Model	HS-600S	HS-600
Power	600W max	
White light	2800K-10000K continuously adjustable	
Color light	Full RGB+white gamut with hue saturation control	
Beam angle	120°	
CRI	≥95	
TLCI	≥91	
Dimming range	0-100%	
Scene effect	Support	
Remote control	DMX512, Remote control, Lishuai APP	
Power output	AC100-240V,50/60HZ,DC48V	
Light emission surface	420x750mm	300x1300mm
Light body size	920x544x182mm	1480x518x182mm
Weight	21.6kg	20.9kg

HS-600S Illumination								
Distance	CCT Illumination	2800K	3200K	5600K	10000K	R (Red light)	G (Green light)	B (Blue light)
	1m		14820Lux	14830Lux	17180Lux	15810Lux	2705Lux	9545Lux
2m		4300Lux	4240Lux	4950Lux	4520Lux	780Lux	2750Lux	365Lux

HS-600 Illumination								
Distance	CCT Illumination	2800K	3200K	5600K	10000K	R (Red light)	G (Green light)	B (Blue light)
	1m		12890Lux	13040Lux	14260Lux	14550Lux	2050Lux	8260Lux
2m		4080Lux	4140Lux	4520Lux	4660Lux	670Lux	2670Lux	380Lux




Professional RGB Full Color Panel Light



HUESCAPE HS-600S / HS-600

Professional RGB Full Color Panel Light 600W

- Soft light without harshness
- High frequency photography without flicker
- Supports Bluetooth APP control
- Four-leaf barndoor design
- LED display screen
- High color reproduction

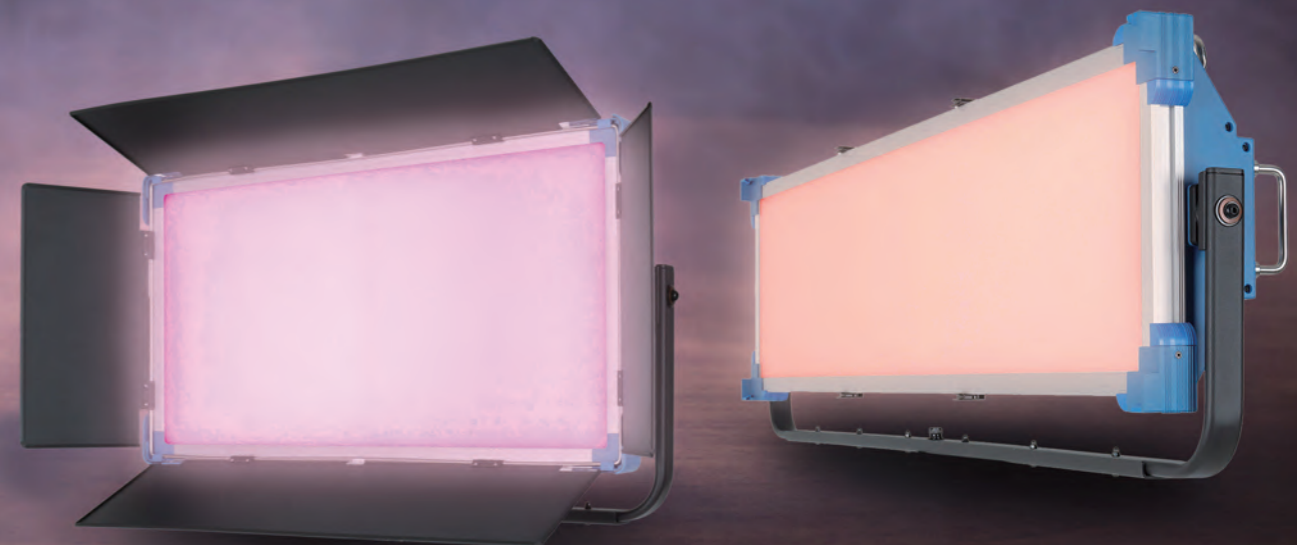

Product Specifications

Model	HS-120	HS-150	HS-300
Beam angle	120°		
White light	2800K-10000K continuously adjustable		
Color light	Full RGB+white gamut with hue saturation control		
Dimming range	0-100%		
Power	120W max	140W max	320W max
CRI	≥95	>95	>95
TLCI	≥95	>91	>91
Light emission surface	480x250mm	300x300mm	300x550mm
Power output	AC100-240V, 50/60HZ,DC15V	AC100-240V, 50/60HZ,DC15V	AC100-240V, 50/60HZ,DC30V
Light body size	670x475x80mm	470x518x182mm	720x518x182mm
Weight	7.17kg	9.2kg	14.7kg

Distance	CCT Illumination				R (Red light)	G (Green light)	B (Blue light)
	2800K	3200K	5600K	10000K			
1m	2632Lux	2803Lux	2894Lux	2640Lux	595Lux	1534Lux	260Lux
2m	696Lux	739Lux	757Lux	697Lux	161Lux	401Lux	72Lux

Distance	CCT Illumination				R (Red light)	G (Green light)	B (Blue light)
	2800K	3200K	5600K	10000K			
1m	2972Lux	3060Lux	3394Lux	3502Lux	467Lux	2067Lux	292Lux
2m	848Lux	860Lux	942Lux	996Lux	133Lux	575Lux	85Lux

Distance	CCT Illumination				R (Red light)	G (Green light)	B (Blue light)
	2800K	3200K	5600K	10000K			
1m	6385Lux	6522Lux	6917Lux	6960Lux	1049Lux	4058Lux	607Lux
2m	1839Lux	1860Lux	1996Lux	2008Lux	297Lux	1176Lux	183Lux



Be Brighter, Be Softer,
Be Standout



HUESCAPE HS-120 / HS-150 / HS-300

Professional RGB Full Color Panel Light



High brightness
essential for large scenes




All metal
design



0-100%
stepless dimming



Lishuai
APP control

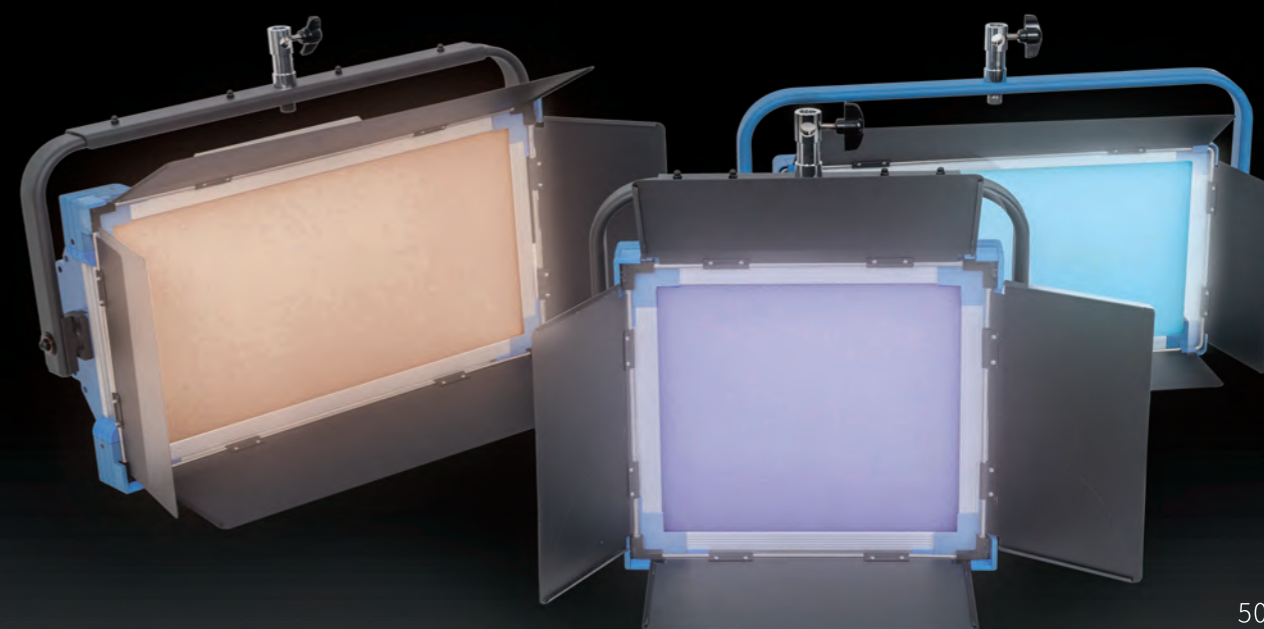



B i-color Soft light Series

C200 / C400



Product Specifications

Model	C400	C200
Beam angle	120°	
Color temperature	2800K(±150K)-6500K(±300K)	
Dimming range	0-100%	
CRI	≥96	
Power	200W	120W
Working voltage	AC100V-240V DC25.6V-33.6V	AC100V-240V DC15V
Size	1056x335x133mm	630x130x440mm
Weight	10.5kg	4.9kg

Professional Studio Panel Light

C400 200W

C200 120W

C400 Illumination					
CCT \ Distance	2800K	3200K	4400K	5600K	6500K
1m	3116Lux	3585Lux	3979Lux	3919Lux	3955Lux
2m	942Lux	1074Lux	1199Lux	1187Lux	1201Lux

C200 Illumination					
CCT \ Distance	2800K	3200K	4400K	5600K	6500K
1m	2443Lux	2611Lux	2908Lux	2815Lux	2620Lux
2m	696Lux	751Lux	833Lux	802Lux	746Lux



Product Specifications

Model	P-1380 ASVL	P-1580 ASVL	P-2400 ASVL
Beam angle	120°		
Color temperature	3200K(±150K)-5600K(±300K)		
Dimming range	10-100%		
Power	100W	120W	160W
CRI	≥96	≥95	≥96
Working voltage	AC100V-240V, DC15V	AC100V-240V, DC12-24V	AC100V-240V, DC25.6V-33.6V
Size	630x130x440mm	615x490x95mm	1056x335x133mm
Weight	4.9kg	5.42kg	10.5kg

P-1380ASVL Illumination				
Distance	CCT	3200K	4400K	5600K
	1m		2190Lux	2813Lux
2m		606Lux	788Lux	696Lux

P-1580ASVL Illumination				
Distance	CCT	3200K	4400K	5600K
	1m		3277Lux	3817Lux
2m		917Lux	1079Lux	1047Lux

P-2400ASVL Illumination				
Distance	CCT	3200K	4400K	5600K
	1m		3573Lux	4105Lux
2m		1117Lux	1259Lux	1248Lux



Large Luminous Surface
P-1380 / 1580 / 2400 ASVL



Bi-color Panel Light

P-1380 ASVL
100W

P-1580 ASVL
120W

P-2400 ASVL
160W





Unleash the Power of Light - Let
it Reveal Everything



C-300RS / C-700RSV / C-1500RSV

Bi-color Soft LED Round Panel

Product Specifications

Model	C-300RS	C-700RSV	C-1500RSV
Power	30W	60W	120W
Color temperature	3200K(±200K)- 5600K(±300K)	3200K(±200K)- 5600K(±300K)	3200K(±150K)- 5600K(±300K)
Working voltage	DC7.4V-14.8V	DC14.8V-16.8V	DC13V-17V
Beam angle	2050Lux/0.5m, 570Lux/m	1065Lux/m, 350Lux/2m	1900Lux/m, 655Lux/2m
Size	φ260x46mm	φ520x50mm	φ800x87mm
Weight	742g	2.85kg	9.23kg

C-300RS 30W



C-700RSV 60W



C-1500RSV 120W



04
FIN D SERIES



Here's a Billion Colors for You - Discover a World of Endless Possibilities

【 Full color 】

【 Portable 】

【 Flowing Light 】



Product Specifications

Model	HS-T25	HS-T60	HS-T120
Power	6W	20W	40W
Working voltage	3.7V	DC24V	DC24V
Working duration	70min	120min	120min
Battery	2500mAh	2500mAh	5000mAh
Dimension	250xφ44mm	621xφ44mm	1191xφ44mm
Weight	260g	750g	1350g
Dimming range	0-100%		
Color temperature	2600K-7500K		
CRI	≥95		
TLCI	≥97		
LEDs	Cool white+Warm white+RGB		
Charging time	About 3.5h		

HS-T25 Illumination					
CCT Illumination	2600K	7500K	R (Red light)	G (Green light)	B (Blue light)
Distance 0.3m	1133Lux	1540Lux	58Lux	161Lux	37Lux
1m	118Lux	159Lux	6Lux	16Lux	4Lux

HS-T60 Illumination							
CCT Illumination	2600K	3200K	4400K	5600K	R (Red light)	G (Green light)	B (Blue light)
Distance 0.5m	1077Lux	1138Lux	1224Lux	1309Lux	433Lux	946Lux	205Lux
1m	324Lux	341Lux	364Lux	384Lux	130Lux	279Lux	62Lux

HS-T120 Illumination							
CCT Illumination	2600K	3200K	4400K	5600K	R (Red light)	G (Green light)	B (Blue light)
Distance 0.5m	1455Lux	1516Lux	1653Lux	1722Lux	540Lux	1257Lux	255Lux
1m	550Lux	582Lux	621Lux	653Lux	202Lux	469Lux	95Lux



Flowing Light and Color Dynamic and Static Balance



Pixel dot matrix control

Wireless DMX support, driving creativity

Different sizes, brainstorming

Multi light linkage, as free as flowing water

HS-T25 / HS-T60/ HS-T120

RGB Full Color Tube Light

6W/20W/40W

Product Specifications

Model	HS-T2X	HS-T4X
Power	30W	60W
Color light	Full RGB+white gamut with hue saturation control	Full RGB+WT gamut with hue saturation control
CRI	≥96	≥93
TLCI	≥95	≥95
Light emission surface	φ50x590mm	φ50x1190mm
Dimension	φ58x830mm	φ58x1540mm
Weight	900g	1.58kg
Working voltage	AC100-240V,50/60HZ,DC13-17V	
Beam angle	360°	
Dimming range	10-100%	
White light	2800-10000Kcontinuously adjustable	

HS-T2X Illumination								
Distance	CCT Illumination	2800K	3200K	5600K	10000K	R (Red light)	G (Green light)	B (Blue light)
		0.5m	504Lux	530Lux	571Lux	567Lux	309Lux	850Lux
1m	160Lux	168Lux	181Lux	178Lux	91Lux	255Lux	36Lux	

HS-T4X Illumination								
Distance	CCT Illumination	2800K	3200K	5600K	10000K	R (Red light)	G (Green light)	B (Blue light)
		0.5m	948Lux	980Lux	1039Lux	1000Lux	413Lux	1195Lux
1m	393Lux	395Lux	426Lux	400Lux	170Lux	487Lux	86Lux	



Walking Studios in the Future

HS-T2X/ HS-T4X



Light, soft,
and explosion-proof



360 ° fully soft
luminous surface



One light with
multiple functions



Color as
you wish



Movie grade
special effects



Efficient heat
dissipation

Full Color RGB Soft Tube Light



Product Specifications

Model	HS-P12	HS-P10
Power	12W	10W
Color temperature	3200K-5600K continuously adjustable	2500K-8500K continuously adjustable
Battery capacity	7.4V/3000mAh	3.85V/4000mAh
Working duration	140min	90min
Weight	200g	165g
Dimension	132x79x17.5mm	134.7x77.6x10.5mm
Charging time	2.5h	2h
Scene effect	Support (>15)	Support (20)
TLCI	≥95	≥97
CRI	≥95	
Color light	RGBW control	
Dimming range	0-100%	

HS-P10 Illumination					
LEDs Distance	Warm white	Cool white	R (Red light)	G (Green light)	B (Blue light)
0.3m	1731Lux	2160Lux	525Lux	1292Lux	262Lux
0.5m	638Lux	879Lux	248Lux	476Lux	83Lux
1m	255Lux	315Lux	88Lux	188Lux	51Lux



Easy Creativity Play with Color



HS-P12 / HS-P10



Lightweight and portable,
easy to place anywhere




TYPE-C
charging



Super long
battery life

RGB Full Color Pocket Light

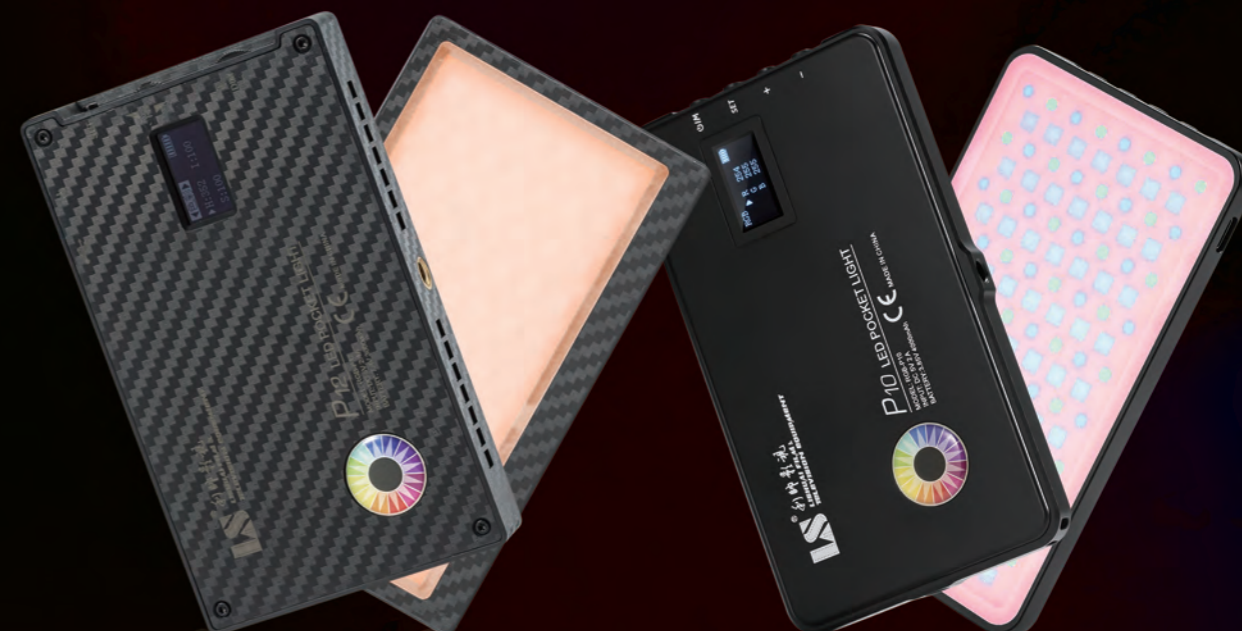



Dazzling · Brilliant

FIND A8



Accessible on-site
light source



Multi light collective power supply
Pick up the suitcase and go



APP control wireless
group creativity



Flexible Light, compact in
size with superpowers

RGB Full Color Ball Light



Product Specifications

Model	A8
Power	8W
Color light	RGBW control
Dimming range	0-100%
Color temperature	2600K-7500K continuously adjustable
CRI	95 max
TLCI	97 max
Battery capacity	7.4V/2500mAh
Working duration	130min
Scene effect	Support (15)
HSI	0-360°
Charging time	About 3h
Weight	290g
Dimension	87xφ104mm

A8 Illumination

CCT \ Distance	2600K	7500K	R (Red light)	G (Green light)	B (Blue light)
0.3m	649Lux	735Lux	26Lux	77Lux	21Lux
0.5m	274Lux	312Lux	11Lux	31Lux	8Lux
1m	73Lux	83Lux	3Lux	9Lux	2Lux

FIND W5 / W10

Pioneer of Curved Wide-Angle Lights

- | 180° ultra wide beam angle |
- | High soft light diffuser |
- | Small size with powerful functionality |



“

Light Up Your World
with a Wider View

”


Product Specifications

Model	W5	W10
Power	5W	18W
Beam angle	120°-140°	180°
Working voltage	DC5V	DC12-17V
Battery capacity	2500mAh, 3.7V	4400mAh, 7.4V
Size	120x27x75mm	191x67x121mm
Weight	166g	534g
Color temperature	3200K(±200K)-5600K(±300K)	
CRI	95-98	
TLCI	≥95	
Working duration	90min	
Charging time	About 4-5h	

W5 Illumination				
CCT	3200K (without diffuser)	5600K (without diffuser)	3200K (with diffuser)	5600K (with diffuser)
Distance				
0.5m	637Lux	667Lux	423Lux	455Lux
1m	173Lux	185Lux	120Lux	133Lux

05 FLAGLITE SERIES

“ Reshaping Portability and Efficiency - Redefining the Way You Work

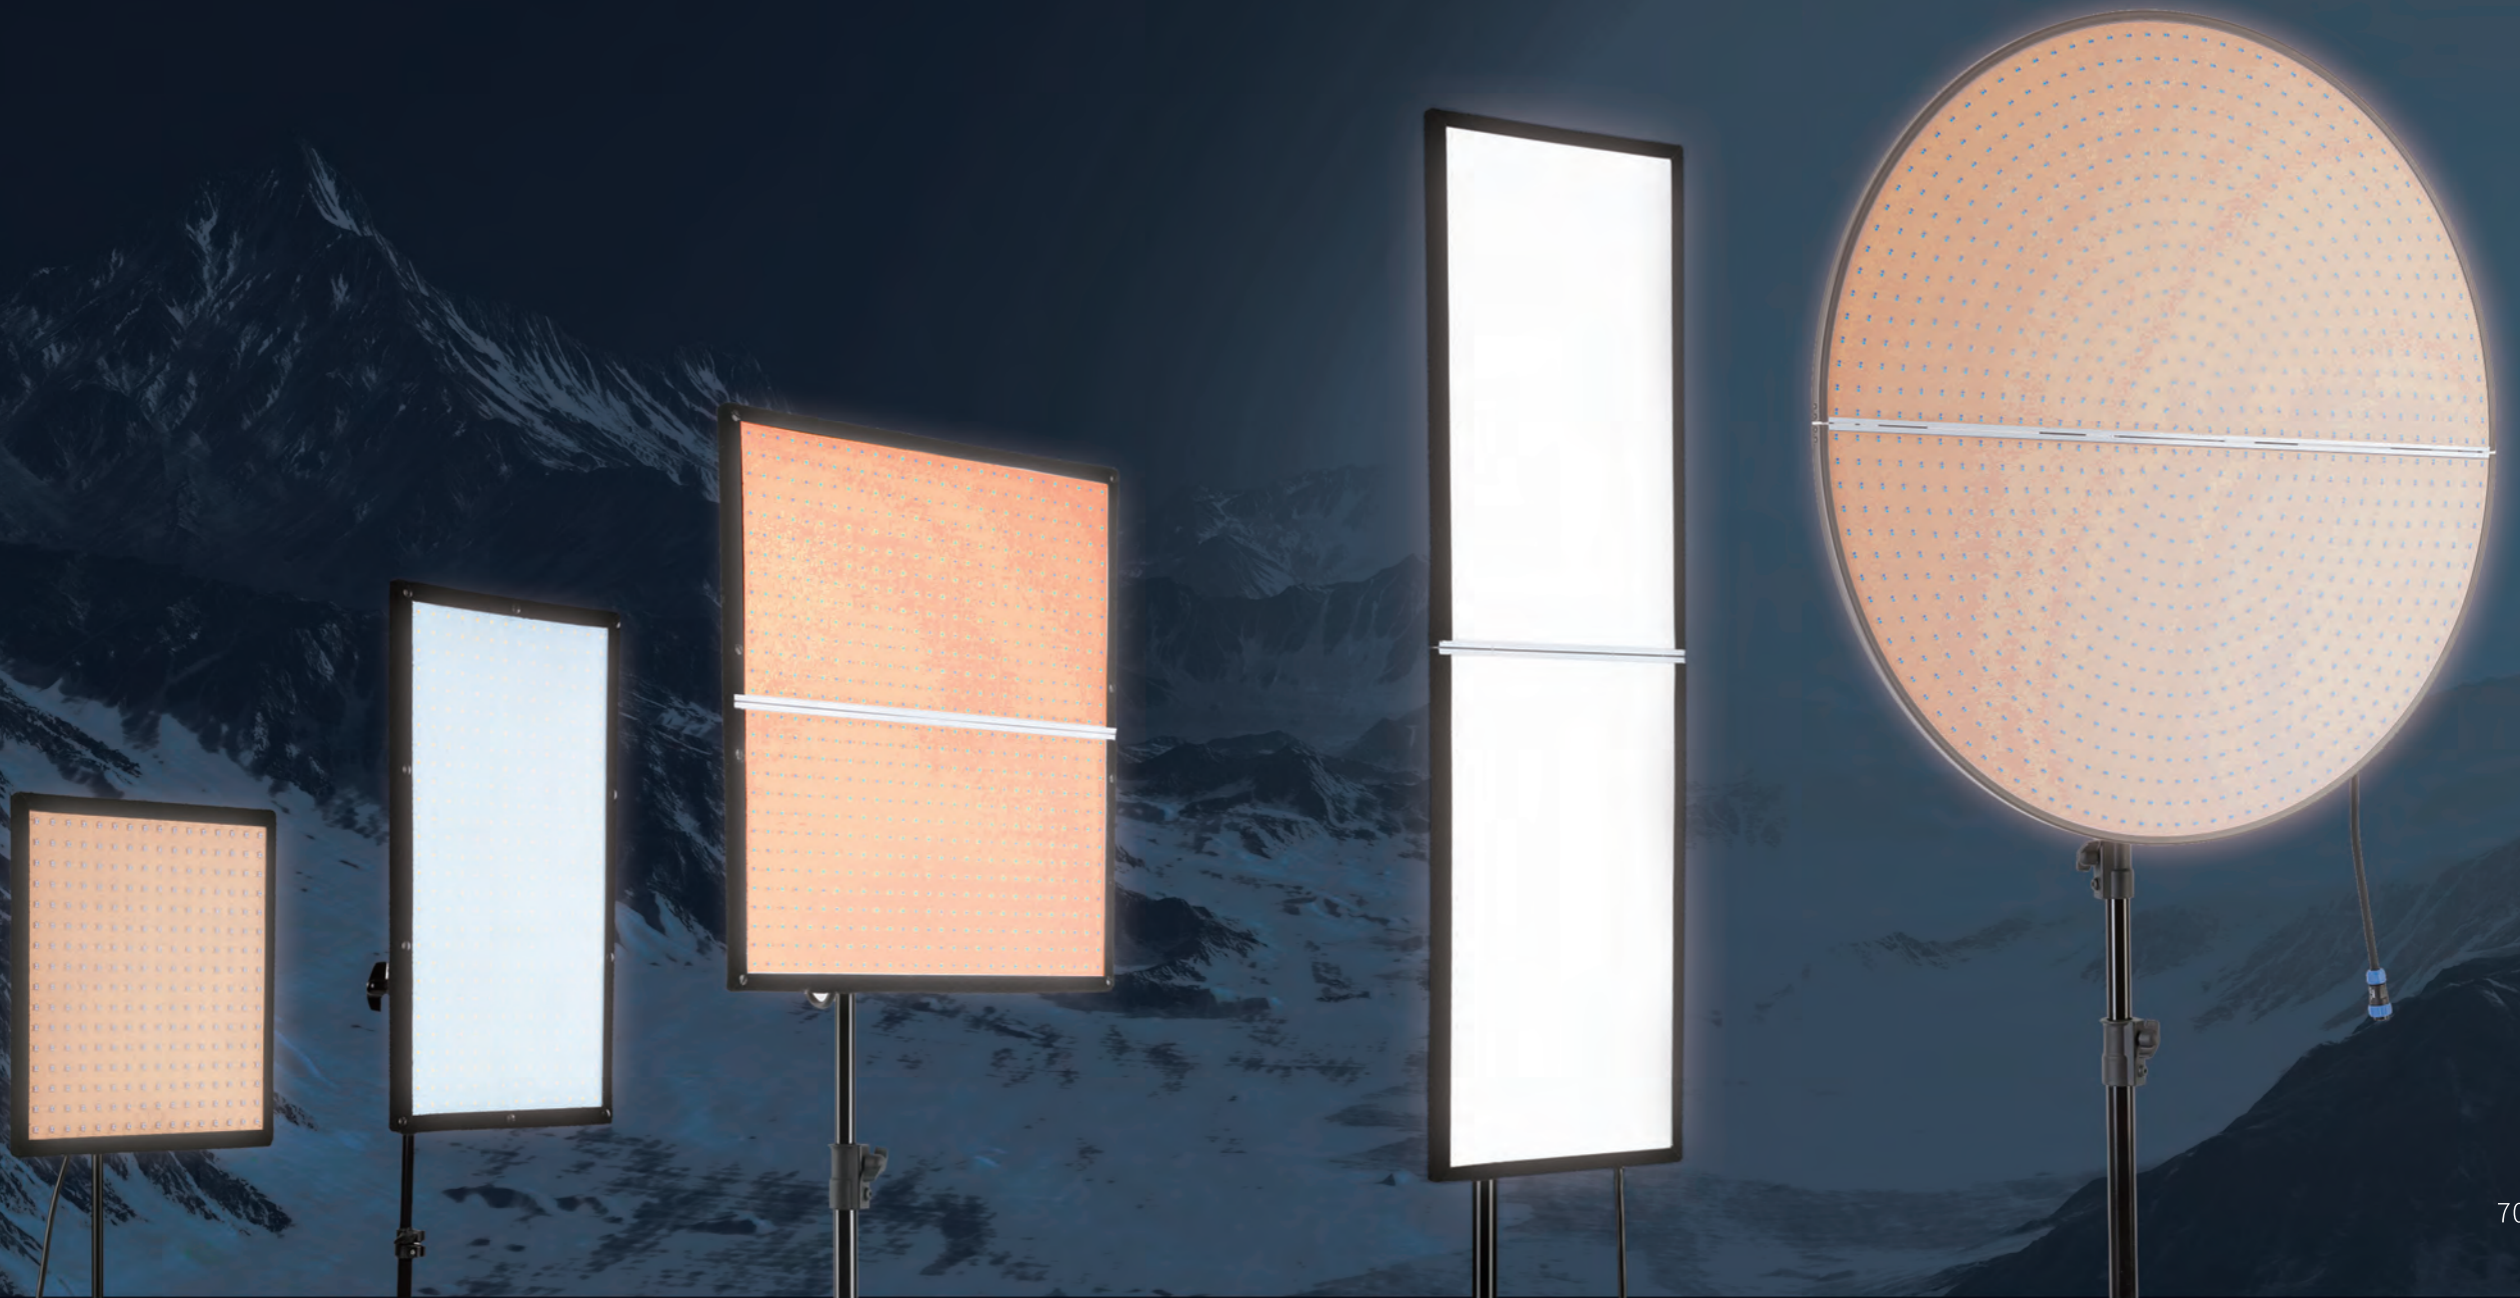

Product Specifications

Model	FL50BI	FL70BI
Power	50W	70W
Light body size	335x335x20mm	530x305x20mm
Light body Weight	1.4kg	1.65kg
Beam angle	120°	
Color temperature	2800K(±150K)-6500K(±200K)	
CRI	96-98	
TLCI	≥96	
Working voltage	AC100-240V,DC13-17V	
Size(Control Box)	235x140x69mm	

FL50BI Illumination					
CCT \ Distance	2800K	3200K	4400K	5600K	6500K
1m	1579Lux	1670Lux	1897Lux	1853Lux	1763Lux
2m	424Lux	448Lux	509Lux	493Lux	472Lux

FL70BI Illumination					
CCT \ Distance	2800K	3200K	4400K	5600K	6500K
1m	2064Lux	2283Lux	2492Lux	2436Lux	2298Lux
2m	558Lux	619Lux	694Lux	670Lux	635Lux



Lighten Your Load with a
Reliable, Lightweight Solution




Bi-color Portable LED Panel

FLAGLITE FL50BI

50W

FLAGLITE FL70BI

70W

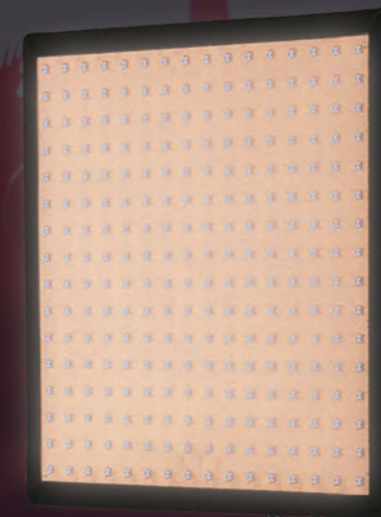



Slim and Bright Visual Presentation



Bi-color portable LED panel

FL150 / FL150L 150W

FL-Q1500R 260W



Product Specifications

Model	FL150	FL150L	FL-Q1500R
Power	150W	150W	260W
Working voltage	AC100-240V, DC13-17V	AC100-240V, DC13-17V	AC100-240V, DC24-30V
Size(Control Box)	142x270x83mm	142x270x83mm	142x480x83mm
Size(Light body)	520x560x30mm	1020x300x48mm	φ900x300mm
Weight(Light body)	2.96kg	2.75kg	6.2kg
Beam angle	120°		
Color temperature	2800K(±150K)-6500(±200K)		
CRI	96-98		
TLCI	≥96		


FL150 Illumination					
Distance \ CCT	2800K	3200K	4400K	5600K	6500K
1m	3852Lux	4259Lux	4649Lux	4543Lux	4342Lux
2m	1083Lux	1183Lux	1317Lux	1269Lux	1217Lux

FL150L Illumination					
Distance \ CCT	2800K	3200K	4400K	5600K	6500K
1m	3492Lux	3767Lux	4259Lux	4103Lux	3900Lux
2m	1051Lux	1146Lux	1278Lux	1229Lux	1184Lux

06 VICTORSOFT SERIES



Light and Shadow Change,
Creating Stunning Beauty



Product Specifications

Model	V-2000ASVL	V-4000ASVL	V-6000ASVL
Power	100W	200W	300W
Weight(Light body)	6.4kg	9.09kg	15.27kg
Size(Light body)	450x550x90mm	700x550x90mm	380x1175x150mm
Color temperature	3200K(±150K)-5600K(±300K)		
Beam angle	120°		
CRI	≥96		
Working voltage	AC100V-240V,DC24V-30V		

V-2000ASVL Illumination			
Distance \ CCT	3200K	4400K	5600K
1m	2337Lux	2821Lux	2732Lux
2m	658Lux	777Lux	748Lux

V-4000ASVL Illumination			
Distance \ CCT	3200K	4400K	5600K
1m	4645Lux	5420Lux	5267Lux
2m	1337Lux	1554Lux	1513Lux

V-6000ASVL Illumination			
Distance \ CCT	3200K	4400K	5600K
1m	6600Lux	7522Lux	7226Lux
2m	2087Lux	2319Lux	2242Lux



Momentary Highlights
Stunning to All



VICTORSOFT Bi-Color LED Panel Light

V-2000ASVL
100W

V-4000ASVL
200W

V-6000ASVL
300W



“**R**estore Luster to Your World
VICTORSOFT VR-2500 / 1200ASVL”

■ **Product Specifications**

Model	VR-1200ASVL	VR-2500ASVL
Power	55W	100W
Size	405x460x95mm	550x600x95mm
Weight	3.7kg	6.7kg
Beam angle	120°	
CRI	≥96	
Working voltage	AC100V-240V,DC13V-17V	
Color temperature	3200K(±150K)-5600K(±300K)	

Distance	CCT		
	3200K	4400K	5600K
1m	1287Lux	1433Lux	1383Lux
2m	357Lux	395Lux	385Lux

Distance	CCT		
	3200K	4400K	5600K
1m	2698Lux	2633Lux	2968Lux
2m	746Lux	731Lux	836Lux

VR-2500ASVL

100W

VR-1200ASVL

55W



Accessories



FN1815 Fresnel mount



Material	Nylon , Glass fiber, Optical glass
Dimension	180X(140-195)mm
Weight	1.09kg
Suitable for models	150D/150X/200D/200X/300D/300X
Mount	Bowens mount
Accessory available	Honeycomb , barndoor, color filters
Beam angle	12° -40°

Material	Aluminium alloy shell Nylon , Glass fiber Optical glass
Dimension	195X(325-365)mm
Weight	2kg
Suitable for models	150D/150X, 200D/200X, 300D/300X, 600D/600X, 1000X PRO
Mount	Bowens mount
Accessory available	Gobo pack, gobo holder, color filter holder, spotlight iris
Beam angle	20°



| SN1980 Spotlight mount |

| Deep parabolic softbox |




Model	P70	P90	P120	P150
Material	High temperature resistant soft light fabric			
Diameter	70X50cm	90X58cm	120X68cm	150X80cm
Weight	1.7kg	1.9kg	2.5kg	3.6kg
Suitable for models	150D/150X, 200D/200X, 300D/300X, 600D/600X, 1000X PRO			
Mount	Bowens mount			
Accessory	White diffuser			
Accessory available	Fabric honeycomb grid			

| Lantern softbox |



Model	SBL65	SBL80	SBL100	SBL120
Material	High temperature resistant soft light fabric			
Dimension	65cm	80cm	100cm	120cm
Suitable for models	150D/150X, 200D/200X, 300D/300X, 600D/600X, 1000X PRO			
Mount	Bowens mount			

| CS3120 Strip Softbox |

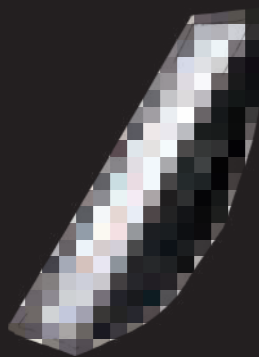

Material	High temperature resistant soft light fabric
Weight	1KG
Dimension	30X120CM
Suitable for models	120X,200D/X,300D/X,600D/X
Mount	Bowens mount

Light stand

| LS-250T |



242cm
 84cm
 73.5cm
 1.7kg
 3kg

| LS-260F |



260cm
 110cm
 110cm
 3.8kg
 6kg

| LS-280T |



280cm
 96cm
 84cm
 1.8kg
 3kg

| LS-400BS |



408cm
 149cm
 142cm
 18.8kg
 10kg

Light stand

| LS-226F |



226cm	115cm	93cm	11.5kg	15kg

| C stand C-328 |



328cm	145cm	145cm	7.5kg	10kg

| LS-60T |



60cm	36.5cm	10.5cm	1.05kg	5kg

| BM-370 |



370cm	224cm	224cm	23.4kg	30kg

Pipe clamp

| CA119 |



Dimension	140*70*36mm
Weight	0.23kg
Loading weight	30kg
Pipe diameter	20mm-35mm
Threaded hole	1/4 and 3/8

| CA120 |



Dimension	140*70*43mm
Weight	0.23kg
Loading weight	30kg
Pipe diameter	20mm-35mm
V mount	with 1pcs

| CA121 |



Dimension	145*147*43mm
Weight	0.45kg
Loading weight	30kg
Pipe diameter	20mm-35mm
Threaded hole	1/4 and 3/8
V mount	with 2pcs

| CA129 |



Dimension	240*136*88mm
Weight	1.05kg
Loading weight	12kg
Pipe diameter	10mm-35mm

Bag & case



Lishuai
Wechat Account



Lishuai
Wechat Assistant



Tiktok
China



Android



iOS