



LISHUAI FILM & TELEVISION EQUIPMENT

About us
ENTERPRISE INTRODUCTION

Established in 2003, Yuyao Lishuai Film & Television Equipment Co., Ltd is a high-tech enterprise integrating R&D, production and sales of LED photo and video lighting equipments and accessories, and has passed ISO9001 certification. Since 2006, the company has been mainly committed to the application of various LED lights in the film and photography industries. Up to now, the LS brand and products are specially preferred by film crews, program groups, TV stations, advertisers, lighting engineers, photographers and cameramen. During the company's development, we adhered to the principle of "taking honesty as foundation, self-surpassing and creative". By present the company has obtained 2 invention patents, 36 Utility Model patents and Design patents and has been recognized as a "National High-tech Enterprise" for three years since 2014. Every year the company develops sino-foreign cooperation projects and by now has cooperated with several well-known enterprises at home and abroad and has achieved good results. By now the company's current products have passed CE certification. By steady efforts, our products have been sold far to Europe, America, Middle East, Southeast Asia and Hong Kong, Macao and Taiwan regions, many provinces and cities in China. Customer's trust is always our company's pursue and company's development is inseparable from the support of customers. We sincerely welcome you to join us for future development.



LS FOCUS 1000X PRO Specifications

- 500W+500W Bi-color
- High CRI 95
- Taiwan imported LED
- MW Power adapter
- Outdoor rainproof



FOCUS 1000X PRO	
LED	1000W COB
Beam angle	120°
CRI	95
Color temperature	2700K-6500K
TLCI	95
Power	500W daylight+500W tungsten(600W max)
Working voltage	AC100-240V,DC36-48V
Cooling system	Heat pipe radiator, Temperature controlled fan
Dimension (light body)	10.4 x 12.1x16.8" (263x307x426mm)
Dimension (power control box)	12.8x7.3 x8.3" (325x185x212mm)
Weight	Light body: 12.1 lb (5.49kg), Power control box: 18.3 lb (8.3kg)



300W+300W Bi-color FOCUS 600D/X

- High CRI 95+
- Taiwan imported LED
- MW Power adapter



- Control box with handle, easy to carry
- Remote control or APP control
- LCD display
- Bowens mount

LS FOCUS 600D/X Specifications

FOCUS 600D	
LED	600W COB
Beam angle	120°
CRI	≥96
Color temperature	5600K ± 200K
TLCI	≥96
Power	600W
Working voltage	AC100-240V,DC36-48V
Cooling system	Heat pipe radiator, Temperature controlled fan
Dimension (light body)	10.4 x 12.1x16.8" (263x307x426mm)
Dimension (power control box)	12.8x7.3 x8.3" (325x185x212mm)
Weight	Light body: 12.1 lb (5.49kg), Power control box: 11 lb (5kg)

FOCUS 600X Bi-color		
LED	600W COB	
Beam angle	120°	
CRI	≥95	
Color temperature	2700K-6500K	
TLCI	≥95	
Power	300W daylight+300W tungsten(600W max)	
Working voltage	AC100-240V,DC36-48V	
Cooling system	Heat pipe radiator, Temperature controlled fan	
Dimension (light body)	10.4 x 12.1x16.8" (263x307x426mm)	
Dimension (power control box)	12.8x7.3 x8.3" (325x185x212mm)	
Weight	Light body: 12.1 lb (5.49kg), Power control box: 8.5 lb (3.85kg)	

[600X illuminance without reflector]					
Color temperature	2700K	3200K	4400K	5600K	6500K
1m	716Lux	913Lux	1409Lux	1079Lux	907Lux
2m	179Lux	228Lux	352Lux	269Lux	226Lux
5m	37Lux	47Lux	73Lux	56Lux	47Lux
10m	9Lux	12Lux	18Lux	14Lux	12Lux

[600X illuminance with standard reflector 15°]					
Color temperature	2700K	3200K	4400K	5600K	6500K
1m	1101Lux	1430Lux	2043Lux	1720Lux	1334Lux
2m	275Lux	357Lux	510Lux	430Lux	333Lux
5m	55Lux	71Lux	102Lux	86Lux	66Lux
10m	14Lux	18Lux	25Lux	21Lux	16Lux

150W+150W Bi-color FOCUS 300D/X

- High CRI 95+
- Taiwan imported LED
- MW Power adapter



- Remote control or APP control
- Bowens mount
- Stepless dimming
- Support household AC power supply or power control box with V-lock battery

- High brightness
- High CRI 95+
- Bowens mount
- 11 special effects
- Taiwan imported LED



- Focus 150D II 150W High power
- Focus 200D II 200W High power
- Remote control or APP control

LS LISHUAI FILM & TELEVISION EQUIPMENT

Specifications: 150D II 150X 200D II 300D II 300X

Model	Focus 150D II	Focus 150X	Focus 200D II	Focus 300D II	Focus 300X
Color temperature	2700K(±200K)~6500K(±300K)	2700K(±200K)~6500K(±300K)	5600K±200K	5600K±200K	2700K(±200K)~6500K(±300K)
CRI	96+	95+	96+	96+	95+
TLCI	96-98	95-98	96-98	96-98	95-98
AC power supply	AC100-240V	AC100-240V	AC100-240V	AC100-240V	AC100-240V
DC power supply	DC15-24V	DC15-24V	DC15-24V	DC24-34V	DC24-34V
Power	150W(Max)	120W(Max)	200W(Max)	300W(Max)	300W(Max)
Remoting mode	Remote +APP control	Remote +APP control	Remote +APP control	Remote +APP control	Remote +APP control
Remote control is optional	Yes	Yes	Yes	Yes	Yes
Dimming	0%-100%	0%-100%	0%-100%	0%-100%	0%-100%
Lighting effects	11	11	11	11	11
DMX	Support	Support	Support	Support	Support
Power control box	Integrated	Integrated	Integrated	Separate	Separate
Multi lamp interconnection	Support	Support	Support	Support	Support
Cooling system	Fan	Fan	Fan	Fan	Fan
Aluminum housing	Yes	Yes	Yes	Yes	Yes
Firmware update	/	/	/	Support	Support
Mount	Bowens mount	Bowens mount	Bowens mount	Bowens mount	Bowens mount
Dimension	230x130x265mm	230x130x265mm	230x130x265mm	229x207x313mm (light body) 160x133x290mm (power control box)	229x207x313mm (light body) 160x133x290mm (power control box)
Weight	2.7kg	2.7kg	2.7kg	3.41kg (light body) 3.8kg (power control box)	3.41kg (light body) 3.8kg (power control box)

LS LISHUAI FILM & TELEVISION EQUIPMENT


FN1815 SN1980



Deep parabolic Softbox		Lantern Softbox	
Model	P70,P90,P120,P150	Model	SBL65,SBL80,SBL100,SBL120
Product material	Selected high temperature resistant soft light fabric	Product material	Selected high temperature resistant soft light fabric
Dimension	Diameter:70cm,90cm,120cm,150cm	Dimension	Diameter:65cm,80cm,100cm,120cm
Suitable for models	150DIX,200D,300DIX,600DIX,1000X	Suitable for models	150DIX,200D,300DIX,600DIX,1000X
Mount	Bowens mount	Mount	Bowens mount
Accessories included	White diffusion cloth		
Accessories available	Cloth light guide grid		

LS LISHUAI FILM & TELEVISION EQUIPMENT

LS-250T LS-260F LS-270F

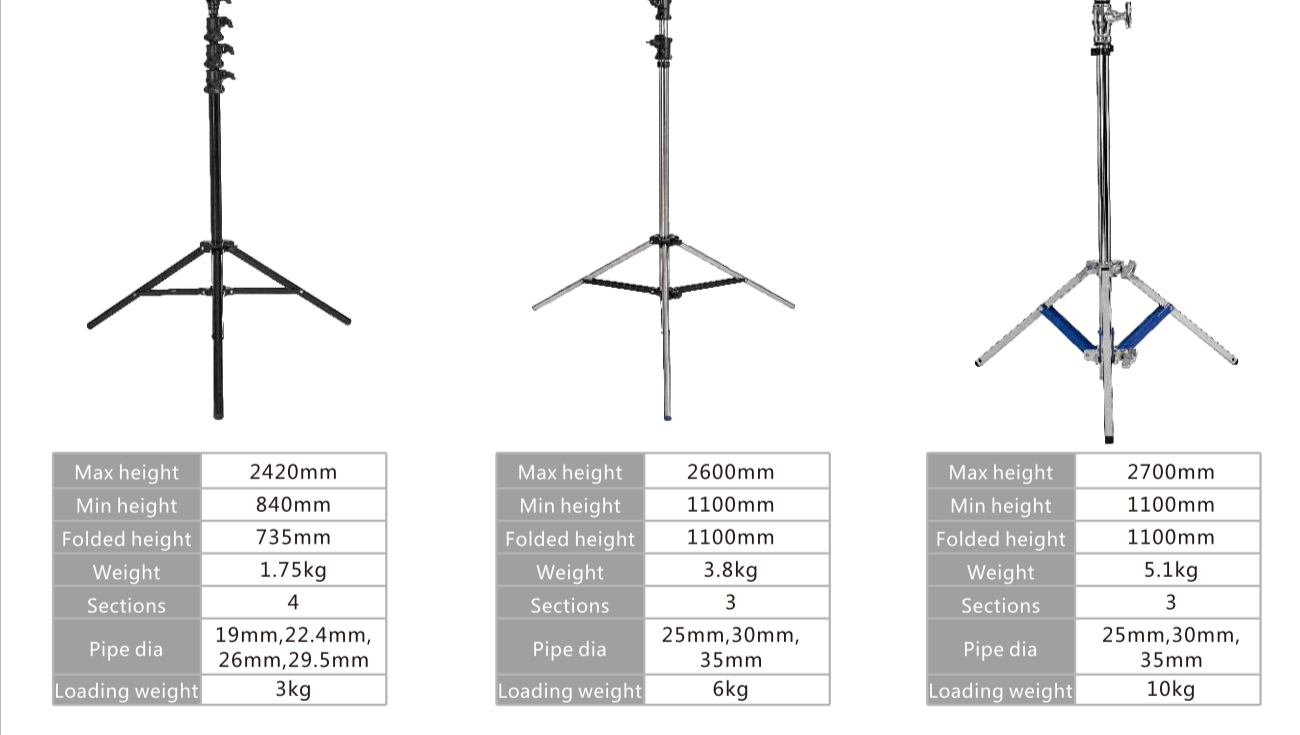

CA119		CA120		CA121	
Size	140x70x36mm	Size	140x70x43mm	Size	145x147x43mm
Weight	0.23kg	Weight	0.23kg	Weight	0.45kg
Loading weight	30kg	Loading weight	30kg	Loading weight	30kg
Pipe dia	20mm-35mm	Pipe dia	20mm-35mm	Pipe dia	20mm-35mm
Threaded hole	1/4" 3/8"	V mount	with 1pc	Threaded hole	1/4" 3/8"
				V mount	with 2pcs

LS LISHUAI FILM & TELEVISION EQUIPMENT

利帅影视

LISHUAI FILM & TELEVISION EQUIPMENT

YUYAO LISHUAI FILM & TELEVISION EQUIPMENT CO.,LTD
Add: No.55 East Zhenxing Road, Yuyao City, Zhejiang Province, China
Tel: +86-574-8279333/82626368 Fax: +86-574-82626368
Email: ls@lishuai.com.cn
http://www.lishuai-lighting.com www.led-studiolights.com