NICAR®

warning & safety product

2003-2020

JUCAR AUTO ACCESSORIES CO.,LTD.

Add:No.23 , West Tongji Road,Nantou Town,
Zhongshan City,Guangdong Province,China
Tel:+86-760-23136716
E-mail:sales@jucarauto.com
http://www.jucarauto.com (car accessories)
http://www.nicar.cn (safety products)

2020.09.30

NICAR®

warning & safety product

2003-2020

TÜV CERT ISO9001

amfori BSCI Trade with purpose Approved

2020

CE E RoHS

JUCAR AUTO ACCESSORIES CO.,LTD.

Company profile

Zhongshan Jucar Car accessories Co.,Ltd was founded in 2003 , we are a high-tech manufacturer specialize in research and manufacturing of warning light and truck lighting products , we own full set of automatic production line , Perfect quality control system and advanced quality inspection equipment, we also own groups of professional , efficient producing staff and Reserch & Develop Engineers

After 17years development , As a manufacturer of high quality products ,we always follow the top technology level in the world , our company has passed ISO 2001 Quality management system certification, our main products hold the E-mark certificate, our quality has been proved to be as good as that of the top manufacturer in this field of the wold, gain the high Praise from our customer all over the world

Global sales network

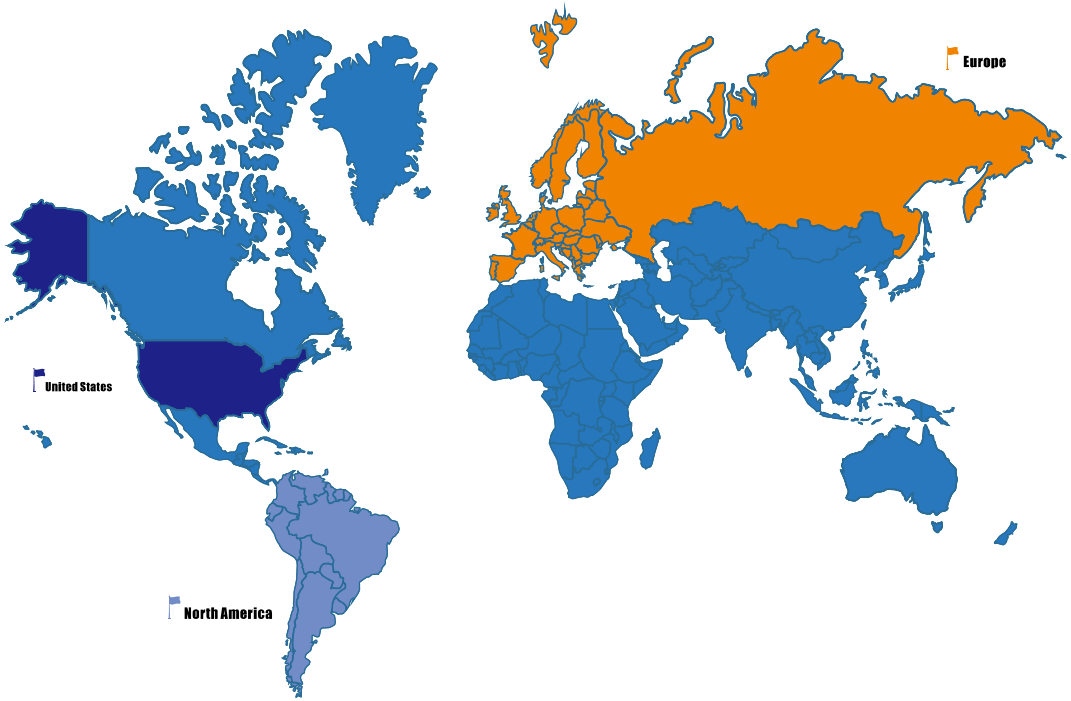

LED WARNING LIGHT
LED STROBE LIGHT
LED LIGHT BAR

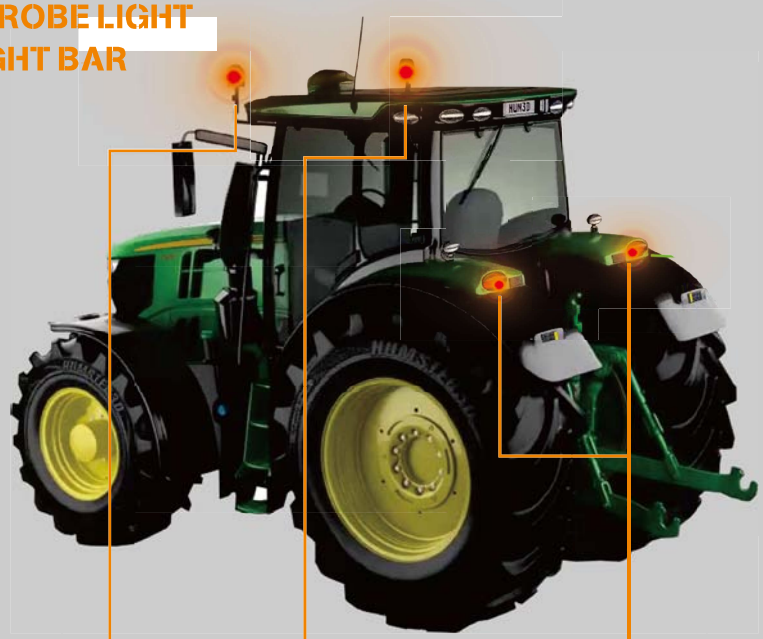

LED WARNING LIGHT
(P 1 ~ P 37)

LED LIGHT BAR
(P 81 ~ P 84)

LED STROBE LIGHT
(P 62 ~ P 66)

LED WARNING LIGHT
LED STROBE LIGHT
MINI LED LIGHT BAR

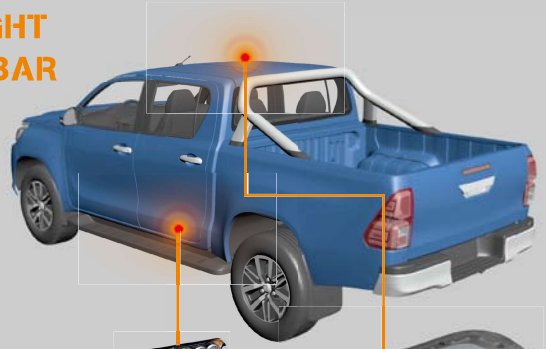

LED STROBE LIGHT
(P 60 ~ P 61)

MINI LED LIGHT BAR
(P 85 ~ P 86)

LED WARNING LIGHT
(P 112 ~ P 114)

MINI LED LIGHT BAR
(P 79)

EMC E9 10R 05 1638

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base



TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL54D	TYPE K Base
WL53D	TYPE I Base
WL116D	TYPE G Base
WL139D	TYPE A Base
WL177D	TYPE H Base
WL263D	TYPE J Base

Item No.	Mounting
WL53SC-D	TYPE D Base
WL99D	TYPE C Base
WL107D	TYPE E Base
WL170D	TYPE F Base
WL166D	TYPE B Base
WL139D-LP	TYPE L Base

LED WARNING LIGHT

EMC E9 10R 05 1638

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | POWR LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base

TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL623	TYPE K Base
WL624	TYPE I Base
WL625	TYPE G Base
WL626	TYPE A Base
WL627	TYPE H Base
WL628	TYPE J Base

Item No.	Mounting
WL629	TYPE D Base
WL630	TYPE C Base
WL631	TYPE E Base
WL632	TYPE F Base
WL633	TYPE B Base
WL626-LP	TYPE L Base

LED WARNING LIGHT

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65

LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base



TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL176A-D	TYPE K Base
WL194D	TYPE I Base
WL176D	TYPE G Base
WL189D	TYPE A Base
WL176BS-D	TYPE H Base
WL266D	TYPE J Base

Item No.	Mounting
WL176SC-D	TYPE D Base
WL187D	TYPE C Base
WL178D	TYPE E Base
WL168D	TYPE F Base
WL188D	TYPE B Base
WL189D-LP	TYPE L Base

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65

POWR LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base



TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base

TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL713	TYPE K Base
WL714	TYPE I Base
WL715	TYPE G Base
WL716	TYPE A Base
WL717	TYPE H Base
WL718	TYPE J Base

Item No.	Mounting
WL719	TYPE D Base
WL720	TYPE C Base
WL721	TYPE E Base
WL722	TYPE F Base
WL723	TYPE B Base
WL716-LP	TYPE L Base

LED WARNING LIGHT

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65

POWR LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base



TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL746	TYPE K Base
WL747	TYPE I Base
WL748	TYPE G Base
WL749	TYPE A Base
WL750	TYPE H Base
WL751	TYPE J Base

Item No.	Mounting
WL752	TYPE D Base
WL753	TYPE C Base
WL754	TYPE E Base
WL755	TYPE F Base
WL756	TYPE B Base
WL749-LP	TYPE L Base

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65

LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base

TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL93D	TYPE K Base
WL96D	TYPE I Base
WL117D	TYPE G Base
WL140D	TYPE A Base
WL97D	TYPE H Base
WL95D	TYPE J Base

Item No.	Mounting
WL93SC-D	TYPE D Base
WL98D	TYPE C Base
WL109D	TYPE E Base
WL169D	TYPE F Base
WL167D	TYPE B Base
WL140D-LP	TYPE L Base

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base



TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL104D	TYPE K Base
WL211D	TYPE I Base
WL212D	TYPE G Base
WL213D	TYPE A Base
WL214D	TYPE H Base
WL215D	TYPE J Base

Item No.	Mounting
WL216D	TYPE D Base
WL105D	TYPE C Base
WL110D	TYPE E Base
WL217D	TYPE F Base
WL218D	TYPE B Base
WL213D-LP	TYPE L Base

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | POWR LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base

TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL93S	TYPE K Base
WL96S	TYPE I Base
WL117S	TYPE G Base
WL140S	TYPE A Base
WL97S	TYPE H Base
WL95S	TYPE J Base

Item No.	Mounting
WL93SC-S	TYPE D Base
WL98S	TYPE C Base
WL109S	TYPE E Base
WL169S	TYPE F Base
WL167S	TYPE B Base
WL140S-LP	TYPE L Base

LED WARNING LIGHT

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | POWR LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base



TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL104S	TYPE K Base
WL211S	TYPE I Base
WL212S	TYPE G Base
WL213S	TYPE A Base
WL214S	TYPE H Base
WL215S	TYPE J Base

Item No.	Mounting
WL216S	TYPE D Base
WL105S	TYPE C Base
WL110S	TYPE E Base
WL217S	TYPE F Base
WL218S	TYPE B Base
WL213S-LP	TYPE L Base

LED WARNING LIGHT

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base

TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL192D	TYPE K Base
WL135D	TYPE I Base
WL210D	TYPE G Base
WL136D	TYPE A Base
WL150D	TYPE H Base
WL193D	TYPE J Base

Item No.	Mounting
WL135SC-D	TYPE D Base
WL146D	TYPE C Base
WL145D	TYPE E Base
WL159D	TYPE F Base
WL160D	TYPE B Base
WL136D-LP	TYPE L Base

LED WARNING LIGHT

R65 E9 10R 05 1668
R10 TA1 E9 00 1525

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65

POWR LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base



TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL192S	TYPE K Base
WL135S	TYPE I Base
WL210S	TYPE G Base
WL136S	TYPE A Base
WL150S	TYPE H Base
WL193S	TYPE J Base

Item No.	Mounting
WL135SC-S	TYPE D Base
WL146S	TYPE C Base
WL145S	TYPE E Base
WL159S	TYPE F Base
WL160S	TYPE B Base
WL136S-LP	TYPE L Base

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65

POWR LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base

TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL558	TYPE K Base
WL557	TYPE I Base
WL560	TYPE G Base
WL553	TYPE A Base
WL554	TYPE H Base
WL561	TYPE J Base

Item No.	Mounting
WL563	TYPE D Base
WL556	TYPE C Base
WL562	TYPE E Base
WL555	TYPE F Base
WL559	TYPE B Base
WL553-LP	TYPE L Base

LED WARNING LIGHT

R65 E9 10R 05 16100
R10 TA1 E9 00 6040

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | POWR LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base



TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL569	TYPE K Base
WL568	TYPE I Base
WL571	TYPE G Base
WL564	TYPE A Base
WL565	TYPE H Base
WL572	TYPE J Base

Item No.	Mounting
WL574	TYPE D Base
WL567	TYPE C Base
WL566	TYPE E Base
WL573	TYPE F Base
WL570	TYPE B Base
WL564-LP	TYPE L Base

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | POWR LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base



TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base

TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL702	TYPE K Base
WL703	TYPE I Base
WL704	TYPE G Base
WL705	TYPE A Base
WL706	TYPE H Base
WL707	TYPE J Base

Item No.	Mounting
WL708	TYPE D Base
WL709	TYPE C Base
WL710	TYPE E Base
WL711	TYPE F Base
WL712	TYPE B Base
WL705-LP	TYPE L Base

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | POWR LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base



TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL735	TYPE K Base
WL736	TYPE I Base
WL737	TYPE G Base
WL738	TYPE A Base
WL739	TYPE H Base
WL740	TYPE J Base

Item No.	Mounting
WL741	TYPE D Base
WL742	TYPE C Base
WL743	TYPE E Base
WL744	TYPE F Base
WL745	TYPE B Base
WL738-LP	TYPE L Base

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base

TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL656	TYPE K Base
WL657	TYPE I Base
WL658	TYPE G Base
WL659	TYPE A Base
WL660	TYPE H Base
WL661	TYPE J Base

Item No.	Mounting
WL662	TYPE D Base
WL663	TYPE C Base
WL664	TYPE E Base
WL665	TYPE F Base
WL666	TYPE B Base
WL659-LP	TYPE L Base

LED WARNING LIGHT

R65 E9 10R 05 16211
R10 TA1 E9 00 1996

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | POWR LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base



TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL192H	TYPE K Base
WL135H	TYPE I Base
WL192HS	TYPE G Base
WL136H	TYPE A Base
WL150H	TYPE H Base
WL193H	TYPE J Base

Item No.	Mounting
WL135SC-H	TYPE D Base
WL146H	TYPE C Base
WL145H	TYPE E Base
WL159H	TYPE F Base
WL160H	TYPE B Base
WL136H-LP	TYPE L Base

R65 E9 10R 05 16099
R10 TA1 E9 00 6063

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base

TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL602	TYPE K Base
WL601	TYPE I Base
WL604	TYPE G Base
WL597	TYPE A Base
WL598	TYPE H Base
WL605	TYPE J Base

Item No.	Mounting
WL607	TYPE D Base
WL600	TYPE C Base
WL599	TYPE E Base
WL606	TYPE F Base
WL603	TYPE B Base
WL597-LP	TYPE L Base

LED WARNING LIGHT

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65

POWR LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base



TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL591	TYPE K Base
WL590	TYPE I Base
WL593	TYPE G Base
WL586	TYPE A Base
WL587	TYPE H Base
WL594	TYPE J Base

Item No.	Mounting
WL596	TYPE D Base
WL589	TYPE C Base
WL595	TYPE E Base
WL588	TYPE F Base
WL592	TYPE B Base
WL586-LP	TYPE L Base

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65

POWR LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base

TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL689	TYPE K Base
WL690	TYPE I Base
WL691	TYPE G Base
WL692	TYPE A Base
WL693	TYPE H Base
WL694	TYPE J Base

Item No.	Mounting
WL695	TYPE D Base
WL696	TYPE C Base
WL697	TYPE E Base
WL698	TYPE F Base
WL699	TYPE B Base
WL692-LP	TYPE L Base

LED WARNING LIGHT

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | POWR LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base



TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL724	TYPE K Base
WL725	TYPE I Base
WL726	TYPE G Base
WL727	TYPE A Base
WL728	TYPE H Base
WL729	TYPE J Base

Item No.	Mounting
WL730	TYPE D Base
WL731	TYPE C Base
WL732	TYPE E Base
WL733	TYPE F Base
WL734	TYPE B Base
WL727-LP	TYPE L Base

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base



TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base

TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL882	TYPE K Base
WL883	TYPE I Base
WL884	TYPE G Base
WL885	TYPE A Base
WL886	TYPE H Base
WL887	TYPE J Base

Item No.	Mounting
WL888	TYPE D Base
WL889	TYPE C Base
WL890	TYPE E Base
WL891	TYPE F Base
WL892	TYPE B Base
WL893	TYPE L Base

LED WARNING LIGHT

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | POWR LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base



TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL402B	TYPE K Base
WL402	TYPE I Base
WL395	TYPE G Base
WL392	TYPE A Base
WL398	TYPE H Base
WL399	TYPE J Base

Item No.	Mounting
WL403	TYPE D Base
WL394	TYPE C Base
WL396	TYPE E Base
WL393	TYPE F Base
WL397	TYPE B Base
WL392-LP	TYPE L Base

LED WARNING LIGHT

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | POWR LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base



TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base

TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL422B	TYPE K Base
WL422	TYPE I Base
WL417	TYPE G Base
WL414	TYPE A Base
WL420	TYPE H Base
WL421	TYPE J Base

Item No.	Mounting
WL423	TYPE D Base
WL416	TYPE C Base
WL415	TYPE E Base
WL418	TYPE F Base
WL419	TYPE B Base
WL414-LP	TYPE L Base

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | POWR LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base



TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL440	TYPE K Base
WL441	TYPE I Base
WL442	TYPE G Base
WL443	TYPE A Base
WL444	TYPE H Base
WL445	TYPE J Base

Item No.	Mounting
WL446	TYPE D Base
WL447	TYPE C Base
WL448	TYPE E Base
WL449	TYPE F Base
WL450	TYPE B Base
WL443-LP	TYPE L Base

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base



TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base

TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL470	TYPE K Base
WL471	TYPE I Base
WL472	TYPE G Base
WL473	TYPE A Base
WL474	TYPE H Base
WL475	TYPE J Base

Item No.	Mounting
WL476	TYPE D Base
WL477	TYPE C Base
WL478	TYPE E Base
WL479	TYPE F Base
WL480	TYPE B Base
WL473-LP	TYPE L Base

LED WARNING LIGHT

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65

LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber, Red, Blue, Green, Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base



TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Item No.	Mounting
WL676	TYPE K Base
WL677	TYPE I Base
WL678	TYPE G Base
WL679	TYPE A Base
WL680	TYPE H Base
WL681	TYPE J Base

Item No.	Mounting
WL682	TYPE D Base
WL683	TYPE C Base
WL684	TYPE E Base
WL685	TYPE F Base
WL686	TYPE B Base
WL679-LP	TYPE L Base

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65

POWR LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber, Red, Blue, Green, Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base

TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Item No.	Mounting
WL757	TYPE K Base
WL758	TYPE I Base
WL759	TYPE G Base
WL760	TYPE A Base
WL761	TYPE H Base
WL762	TYPE J Base

Item No.	Mounting
WL763	TYPE D Base
WL764	TYPE C Base
WL765	TYPE E Base
WL766	TYPE F Base
WL767	TYPE B Base
WL760-LP	TYPE L Base

LED WARNING LIGHT

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber, Red, Blue, Green, Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base



TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL768	TYPE K Base
WL769	TYPE I Base
WL770	TYPE G Base
WL771	TYPE A Base
WL772	TYPE H Base
WL773	TYPE J Base

Item No.	Mounting
WL774	TYPE D Base
WL775	TYPE C Base
WL776	TYPE E Base
WL777	TYPE F Base
WL778	TYPE B Base
WL771-LP	TYPE L Base

LED WARNING LIGHT

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber, Red, Blue, Green, Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base



TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base

TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL191D	TYPE K Base
WL190D	TYPE I Base
WL219D	TYPE G Base
WL186D	TYPE A Base
WL148D	TYPE H Base
WL180D	TYPE J Base

Item No.	Mounting
WL186SC-D	TYPE D Base
WL181D	TYPE C Base
WL182D	TYPE E Base
WL184D	TYPE F Base
WL185D	TYPE B Base
WL186D-LP	TYPE L Base

R65 E9 10R 05 1668
R10 TA1 E9 00 1525

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | POWR LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base



TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL191H	TYPE K Base
WL190H	TYPE I Base
WL219H	TYPE G Base
WL186H	TYPE A Base
WL148H	TYPE H Base
WL180H	TYPE J Base

Item No.	Mounting
WL186SC-H	TYPE D Base
WL181H	TYPE C Base
WL182H	TYPE E Base
WL184H	TYPE F Base
WL185H	TYPE B Base
WL186H-LP	TYPE L Base

R65 E9 10R 05 1668
R10 TA1 E9 00 1545

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | POWR LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base

TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL191S	TYPE K Base
WL190S	TYPE I Base
WL219S	TYPE G Base
WL186S	TYPE A Base
WL148S	TYPE H Base
WL180S	TYPE J Base

Item No.	Mounting
WL186SC-S	TYPE D Base
WL181S	TYPE C Base
WL182S	TYPE E Base
WL184S	TYPE F Base
WL185S	TYPE B Base
WL186S-LP	TYPE L Base

R65 E9 10R 05 16099
R10 TA1 E9 00 6105

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base



TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL536	TYPE K Base
WL535	TYPE I Base
WL538	TYPE G Base
WL531	TYPE A Base
WL532	TYPE H Base
WL539	TYPE J Base

Item No.	Mounting
WL541	TYPE D Base
WL536	TYPE C Base
WL533	TYPE E Base
WL540	TYPE F Base
WL537	TYPE B Base
WL531-LP	TYPE L Base

R65 E9 10R 05 16099
R10 TA1 E9 00 6105

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base



TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base

TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL547	TYPE K Base
WL546	TYPE I Base
WL549	TYPE G Base
WL542	TYPE A Base
WL543	TYPE H Base
WL550	TYPE J Base

Item No.	Mounting
WL552	TYPE D Base
WL545	TYPE C Base
WL544	TYPE E Base
WL551	TYPE F Base
WL548	TYPE B Base
WL542-LP	TYPE L Base

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base



TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL645	TYPE K Base
WL646	TYPE I Base
WL647	TYPE G Base
WL648	TYPE A Base
WL649	TYPE H Base
WL650	TYPE J Base

Item No.	Mounting
WL651	TYPE D Base
WL652	TYPE C Base
WL653	TYPE E Base
WL654	TYPE F Base
WL655	TYPE B Base
WL648-LP	TYPE L Base

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base

TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL656	TYPE K Base
WL657	TYPE I Base
WL658	TYPE G Base
WL659	TYPE A Base
WL660	TYPE H Base
WL661	TYPE J Base

Item No.	Mounting
WL662	TYPE D Base
WL663	TYPE C Base
WL664	TYPE E Base
WL665	TYPE F Base
WL666	TYPE B Base
WL659-LP	TYPE L Base

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65

POWR LED | ECE R65 | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base



TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Item No.	Mounting
WL783	TYPE K Base
WL784	TYPE I Base
WL785	TYPE G Base
WL786	TYPE A Base
WL787	TYPE H Base
WL788	TYPE J Base

Item No.	Mounting
WL789	TYPE D Base
WL790	TYPE C Base
WL791	TYPE E Base
WL792	TYPE F Base
WL793	TYPE B Base
WL786-LP	TYPE L Base

WARNING LIGHT

12-24V | RoHS Certificatte | IP65

HALOGEN | ECE R65 | EMC R10

Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base

TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Item No.	Mounting
WL191MG	TYPE K Base
WL190MG	TYPE I Base
WL219MG	TYPE G Base
WL186MG	TYPE A Base
WL148MG	TYPE H Base
WL180MG	TYPE J Base

Item No.	Mounting
WL186SC-MG	TYPE D Base
WL181MG	TYPE C Base
WL182MG	TYPE E Base
WL184MG	TYPE F Base
WL185MG	TYPE B Base
WL186MG-LP	TYPE L Base

WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | LED | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber, Red, Blue, Green, Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base



TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL192F	TYPE K Base
WL135F	TYPE I Base
WL210F	TYPE G Base
WL136F	TYPE A Base
WL150F	TYPE H Base
WL193F	TYPE J Base

Item No.	Mounting
WL135SC-F	TYPE D Base
WL146F	TYPE C Base
WL145F	TYPE E Base
WL159F	TYPE F Base
WL160F	TYPE B Base
WL136F-LP	TYPE L Base

WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | HALOGEN | EMC R65 | EMC R10

Rotating

Function Available

Belt Drive

Lens Colors Available
Amber, Red, Blue, Green, Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base



TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base

TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL24B-T	TYPE K Base
WL24A-T	TYPE I Base
WL116T	TYPE G Base
WL139T	TYPE A Base
WL177T	TYPE H Base
WL263T	TYPE J Base

Item No.	Mounting
WL24SC-T	TYPE D Base
WL99T	TYPE C Base
WL107T	TYPE E Base
WL170T	TYPE F Base
WL166T	TYPE B Base
WL139T-LP	TYPE L Base

WARNING LIGHT

R65 E9 10R 05 1636
R10 TA1 E8 00 1165

WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | HALOGEN | EMC R65 | EMC R10

Rotating
Function Available

Gear Motor

Lens Colors Available
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base



TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material
Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL24B-G	TYPE K Base
WL24A-G	TYPE I Base
WL116G	TYPE G Base
WL139G	TYPE A Base
WL177G	TYPE H Base
WL263G	TYPE J Base

Item No.	Mounting
WL24SC-G	TYPE D Base
WL99G	TYPE C Base
WL107G	TYPE E Base
WL170G	TYPE F Base
WL166G	TYPE B Base
WL139G-LP	TYPE L Base

WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | HALOGEN | EMC R10

Rotating
Function Available

Gear Motor

Lens Colors Available
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base



TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base

TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material
Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL176A-G	TYPE K Base
WL194G	TYPE I Base
WL176G	TYPE G Base
WL189G	TYPE A Base
WL176BS-G	TYPE H Base
WL266G	TYPE J Base

Item No.	Mounting
WL194SC-G	TYPE D Base
WL187G	TYPE C Base
WL178G	TYPE E Base
WL186G	TYPE F Base
WL188G	TYPE B Base
WL189G-LP	TYPE L Base

WARNING LIGHT

R65 E9 10R 05 1637
R10 E4 00 6579

WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | HALOGEN | EMC R65 | EMC R10

Rotating
Function Available

Belt Drive

Lens Colors Available
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base


TYPE K Base Screw Base


TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug


TYPE H Base Bolt Base


TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base


TYPE E Base Screwing cap Base


TYPE C Base Flexible DIN Base


TYPE G Base Bolt Base


TYPE A Base Flexible DIN Base


TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material
Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL93T	TYPE K Base
WL96T	TYPE I Base
WL117T	TYPE G Base
WL140T	TYPE A Base
WL97T	TYPE H Base
WL95T	TYPE J Base

Item No.	Mounting
WL93SC-T	TYPE D Base
WL98T	TYPE C Base
WL109T	TYPE E Base
WL169T	TYPE F Base
WL167T	TYPE B Base
WL140T-LP	TYPE L Base

WARNING LIGHT

WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | HALOGEN | EMC R10

Rotating
Function Available

Gear Motor

Lens Colors Available
Amber,Red,Blue,Green,Clear

TYPE D Base Screwing cap Base


TYPE K Base Screw Base


TYPE B Base


TYPE J Base Magnetic Sucker Base + Cigar Plug


TYPE H Base Bolt Base


TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base


TYPE E Base Screwing cap Base


TYPE C Base Flexible DIN Base

TYPE G Base Bolt Base


TYPE A Base Flexible DIN Base


TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material
Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL93G	TYPE K Base
WL96G	TYPE I Base
WL117G	TYPE G Base
WL140G	TYPE A Base
WL97G	TYPE H Base
WL95G	TYPE J Base

Item No.	Mounting
WL93SC-G	TYPE D Base
WL98G	TYPE C Base
WL109G	TYPE E Base
WL169G	TYPE F Base
WL167G	TYPE B Base
WL140G-LP	TYPE L Base

WARNING LIGHT

R65 E9 10R 05 1637
R10 TA1 E8 00 1556

WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | HALOGEN | EMC R65 | EMC R10

Rotating
Function Available

Belt Drive

Lens Colors Available
Amber, Red, Blue, Green, Clear

TYPE D Base Screwing cap Base


TYPE K Base Screw Base


TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug


TYPE H Base Bolt Base


TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base


TYPE E Base Screwing cap Base


TYPE C Base Flexible DIN Base


TYPE G Base Bolt Base


TYPE A Base Flexible DIN Base


TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material
Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL104T	TYPE K Base
WL211T	TYPE I Base
WL212T	TYPE G Base
WL213T	TYPE A Base
WL214T	TYPE H Base
WL215T	TYPE J Base

Item No.	Mounting
WL216T	TYPE D Base
WL105T	TYPE C Base
WL110T	TYPE E Base
WL217T	TYPE F Base
WL218T	TYPE B Base
WL213T-LP	TYPE L Base

WARNING LIGHT

WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | HALOGEN | EMC R10

Rotating
Function Available

Gear Motor

Lens Colors Available
Amber, Red, Blue, Green, Clear

TYPE D Base Screwing cap Base


TYPE K Base Screw Base


TYPE B Base


TYPE J Base Magnetic Sucker Base + Cigar Plug


TYPE H Base Bolt Base


TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base


TYPE E Base Screwing cap Base


TYPE C Base Flexible DIN Base

TYPE G Base Bolt Base


TYPE A Base Flexible DIN Base


TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material
Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL104G	TYPE K Base
WL211G	TYPE I Base
WL212G	TYPE G Base
WL213G	TYPE A Base
WL214G	TYPE H Base
WL215G	TYPE J Base

Item No.	Mounting
WL216G	TYPE D Base
WL105G	TYPE C Base
WL110G	TYPE E Base
WL217G	TYPE F Base
WL218G	TYPE B Base
WL213G-LP	TYPE L Base

WARNING LIGHT

WARNING LIGHT

12-24V | RoHS Certificatte | IP65

HALOGEN | EMC R10

Rotating
Function Available

Gear Motor

Lens Colors Available
Amber, Red, Blue, Green, Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base



TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL192G	TYPE K Base
WL135G	TYPE I Base
WL210G	TYPE G Base
WL136G	TYPE A Base
WL150G	TYPE H Base
WL193G	TYPE J Base

Item No.	Mounting
WL135SC-G	TYPE D Base
WL146G	TYPE C Base
WL145G	TYPE E Base
WL159G	TYPE F Base
WL160G	TYPE B Base
WL136G-LP	TYPE L Base

R65 E9 10R 05 1637
R10 TA1 E8 00 1556

WARNING LIGHT

12-24V | RoHS Certificatte | IP65

HALOGEN | EMC R65 | EMC R10

Rotating
Function Available

Belt Drive

Lens Colors Available
Amber, Red, Blue, Green, Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base

TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL191T	TYPE K Base
WL190T	TYPE I Base
WL219T	TYPE G Base
WL186T	TYPE A Base
WL148T	TYPE H Base
WL180T	TYPE J Base

Item No.	Mounting
WL186SC-T	TYPE D Base
WL181T	TYPE C Base
WL182T	TYPE E Base
WL184T	TYPE F Base
WL185T	TYPE B Base
WL186T-LP	TYPE L Base

R65 E9 10R 05 1637
R10 TA1 E8 00 1556

WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | HALOGEN | EMC R65 | EMC R10

Rotating
Function Available

Gear Motor

Lens Colors Available
Amber, Red, Blue, Green, Clear

TYPE D Base Screwing cap Base



TYPE K Base Screw Base



TYPE B Base

TYPE J Base Magnetic Sucker Base + Cigar Plug



TYPE H Base Bolt Base



TYPE I Base Magnetic Base + Cigar Plug

TYPE L Base



TYPE E Base Screwing cap Base



TYPE C Base Flexible DIN Base



TYPE G Base Bolt Base



TYPE A Base Flexible DIN Base



TYPE F Base

Agriculture | Automotive | Construction | Industrial | Material
Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting
WL191G	TYPE K Base
WL190G	TYPE I Base
WL219G	TYPE G Base
WL186G	TYPE A Base
WL148G	TYPE H Base
WL180G	TYPE J Base

Item No.	Mounting
WL186SC-G	TYPE D Base
WL181G	TYPE C Base
WL182G	TYPE E Base
WL184G	TYPE F Base
WL185G	TYPE B Base
WL186G-LP	TYPE L Base

R65 TA1 E9 00 6235
R10 E9 10R 05 16099

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | LED | EMC R65 | EMC R10

WL431SK-SM

WL430SK-SM

WL400SK-SM

WL401SK-SM-RG

Smooth

Striple

Dual Flashing | Single Flashing | Rotating
Function Available

Lens Colors
Amber, Red, Blue, Green, Clear



TYPE M Base
DIN Flexible Base

TYPE N Base
Screw Base

TYPE P Base
Magnetic Base + Spring cable & cigar Plug



TYPE Q Base
Bolt Base

Agriculture | Automotive | Construction | Industrial | Material
Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting	Lens
WL401SK-SM-RG	TYPE M Base	Smooth
WL431SK-SM	TYPE N Base	
WL400SK-SM	TYPE P Base	
WL430SK-SM	TYPE Q Base	

Item No.	Mounting	Lens
WL401SK-ST-RG	TYPE M Base	Striple
WL431SK-ST	TYPE N Base	
WL400SK-ST	TYPE P Base	
WL430SK-ST	TYPE Q Base	

R65 TA1 E9 00 6233

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | POWR LED | EMC R65 | EMC R10

WL670-SM

WL673-SM

WL671-SM

WL672-SM-RG



Smooth

Striple

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors

Amber,Red,Blue,Green,Clear



TYPE M Base
DIN Flexible Base

TYPE N Base
Screw Base

TYPE P Base
Magnetic Base+ Spring cable & cigar Plug



TYPE Q Base
Bolt Base

Agriculture | Automotive | Construction | Industrial | Material | Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting	Lens
WL672-SM-RG	TYPE M Base	Smooth
WL670-SM	TYPE N Base	
WL671-SM	TYPE P Base	
WL673-SM	TYPE Q Base	

Item No.	Mounting	Lens
WL672-ST-RG	TYPE M Base	Striple
WL670-ST	TYPE N Base	
WL671-ST	TYPE P Base	
WL673-ST	TYPE Q Base	

R65 E9 65R00 10 6104 00
R10 E9 10R 05 01.16099 00

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | LED | EMC R65 | EMC R10

WL431S

WL430S

WL400S

WL401S-RG



Smooth

Striple

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors

Amber,Red,Blue,Green,Clear



TYPE M Base
DIN Flexible Base

TYPE N Base
Screw Base

TYPE P Base
Magnetic Base+ Spring cable & cigar Plug



TYPE Q Base
Bolt Base

Agriculture | Automotive | Construction | Industrial | Material | Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting	Lens
WL401S-RG	TYPE M Base	Smooth
WL431S	TYPE N Base	
WL400S	TYPE P Base	
WL430S	TYPE Q Base	

Item No.	Mounting	Lens
WL401S-ST-RG	TYPE M Base	Striple
WL431S-ST	TYPE N Base	
WL400S-ST	TYPE P Base	
WL430S-ST	TYPE Q Base	

SAE J845 JUN2013(SAE W3)
Class 1(Amber/Yellow)

R65 TA1 E9 00 1916
R10 E9 10R 05.1669

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | POWR LED | EMC R65 | EMC R10

WL431

WL430

WL400

WL401-RG



Smooth

Striple

Lens Colors
Amber,Red,Blue,Green,Clear

Dual Flashing | Single Flashing | Rotating
Function Available



TYPE M Base
DIN Flexible Base

TYPE N Base
Screw Base

TYPE P Base
Magnetic Base+ Spring cable & cigar Plug



TYPE Q Base
Bolt Base

Agriculture | Automotive | Construction | Industrial | Material
Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting	Lens
WL401-RG	TYPE M Base	Smooth
WL431	TYPE N Base	
WL400	TYPE P Base	
WL430	TYPE Q Base	

Item No.	Mounting	Lens
WL401-ST-RG	TYPE M Base	Striple
WL431-ST	TYPE N Base	
WL400-ST	TYPE P Base	
WL430-ST	TYPE Q Base	

R65 TA1 E9 00 1916
R10 E9 10R 05.1669

LED WARNING LIGHT Clear Lens

12-24V | RoHS Certificatte | IP65 | POWR LED | EMC R65 | EMC R10

WL431

WL430

WL400

WL401-RG



Smooth

Striple

Lens Colors
Amber,Red,Blue,Green,Clear

Dual Flashing | Single Flashing | Rotating
Function Available



TYPE M Base
DIN Flexible Base

TYPE N Base
Screw Base

TYPE P Base
Magnetic Base+ Spring cable & cigar Plug



TYPE Q Base
Bolt Base

Agriculture | Automotive | Construction | Industrial | Material
Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting	Lens
WL401-RG	TYPE M Base	Smooth
WL431	TYPE N Base	
WL400	TYPE P Base	
WL430	TYPE Q Base	

Item No.	Mounting	Lens
WL401-ST-RG	TYPE M Base	Striple
WL431-ST	TYPE N Base	
WL400-ST	TYPE P Base	
WL430-ST	TYPE Q Base	

LED WARNING LIGHT

R65 E9 65R00 10 6104 00
R10 E9 10R 05 01.16099 00

LED WARNING LIGHT

Clear Lens

12-24V | RoHS Certificatte | IP65 | LED | EMC R65 | EMC R10

WL431S

WL430S

WL400S

WL401S-RG



Smooth

Striple

Lens Colors
Amber,Red,Blue,Green,Clear

Dual Flashing | Single Flashing | Rotating
Function Available



TYPE M Base
DIN Flexible Base

TYPE N Base
Screw Base

TYPE P Base
Magnetic Base+ Spring cable & cigar Plug



TYPE Q Base
Bolt Base

Agriculture | Automotive | Construction | Industrial | Material
Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting	Lens
WL401S-RG	TYPE M Base	Smooth
WL431S	TYPE N Base	
WL400S	TYPE P Base	
WL430S	TYPE Q Base	

Item No.	Mounting	Lens
WL401S-ST-RG	TYPE M Base	Striple
WL431S-ST	TYPE N Base	
WL400S-ST	TYPE P Base	
WL430S-ST	TYPE Q Base	

R65 TA1 E9 00 6235
R10 E9 10R 05 16099

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | LED | EMC R65 | EMC R10

WL431SK-ST

WL430SK-ST

WL400SK-ST

WL401SK-ST-RG



Smooth

Striple

Lens Colors
Amber,Red,Blue,Green,Clear

Dual Flashing | Single Flashing | Rotating
Function Available



TYPE M Base
DIN Flexible Base

TYPE N Base
Screw Base

TYPE P Base
Magnetic Base+ Spring cable & cigar Plug



TYPE Q Base
Bolt Base

Agriculture | Automotive | Construction | Industrial | Material
Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting	Lens
WL401SK-SM-RG	TYPE M Base	Smooth
WL431SK-SM	TYPE N Base	
WL400SK-SM	TYPE P Base	
WL430SK-SM	TYPE Q Base	

Item No.	Mounting	Lens
WL401SK-ST-RG	TYPE M Base	Striple
WL431SK-ST	TYPE N Base	
WL400SK-ST	TYPE P Base	
WL430SK-ST	TYPE Q Base	

LED WARNING LIGHT

R65 TA1 E9 00 6233

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | POWR LED | EMC R65 | EMC R10

WL670-ST

WL673-ST

WL671-ST

WL672-ST-RG



Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber, Red, Blue, Green, Clear



TYPE M Base
DIN Flexible Base

TYPE N Base
Screw Base

TYPE P Base
Magnetic Base+ Spring cable & cigar Plug



TYPE Q Base
Bolt Base

Agriculture | Automotive | Construction | Industrial | Material | Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting	Lens
WL672-SM-RG	TYPE M Base	Smooth
WL670-SM	TYPE N Base	
WL671-SM	TYPE P Base	
WL673-SM	TYPE Q Base	

Item No.	Mounting	Lens
WL672-ST-RG	TYPE M Base	Striple
WL670-ST	TYPE N Base	
WL671-ST	TYPE P Base	
WL673-ST	TYPE Q Base	

R65 E9 65R00 10 6104 00
R10 E9 10R 05 01.16099 00

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | LED | EMC R65 | EMC R10

WL431S-ST

WL430S-ST

WL400S-ST

WL401S-ST-RG



Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber, Red, Blue, Green, Clear



TYPE M Base
DIN Flexible Base

TYPE N Base
Screw Base

TYPE P Base
Magnetic Base+ Spring cable & cigar Plug



TYPE Q Base
Bolt Base

Agriculture | Automotive | Construction | Industrial | Material | Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting	Lens
WL401S-RG	TYPE M Base	Smooth
WL431S	TYPE N Base	
WL400S	TYPE P Base	
WL430S	TYPE Q Base	

Item No.	Mounting	Lens
WL401S-ST-RG	TYPE M Base	Striple
WL431S-ST	TYPE N Base	
WL400S-ST	TYPE P Base	
WL430S-ST	TYPE Q Base	

SAE J845 JUN2013(SAE W3)
Class 1(Amber/Yellow)

R65 TA1 E9 00 1916
R10 E9 10R 05.1669

LED WARNING LIGHT

12-24V | RoHS Certificatte | IP65

POWR LED | EMC R65 | EMC R10

WL431-ST

WL430-ST

WL400-ST

WL401-ST-RG



Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green,Clear



TYPE M Base
DIN Flexible Base

TYPE N Base
Screw Base

TYPE P Base
Magnetic Base+ Spring cable & cigar Plug



TYPE Q Base
Bolt Base

Agriculture | Automotive | Construction | Industrial | Material
Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Mounting	Lens
WL401-RG	TYPE M Base	Smooth
WL431	TYPE N Base	
WL400	TYPE P Base	
WL430	TYPE Q Base	

Item No.	Mounting	Lens
WL401-ST-RG	TYPE M Base	Striple
WL431-ST	TYPE N Base	
WL400-ST	TYPE P Base	
WL430-ST	TYPE Q Base	

ULTRR-THIN LED MODULE

R65 E9 65R00/10 6158 00
R10 E9 10R 05.11935

8 kind of strobe function

ECE R65 | EMC R10 | SAE J845

LED-3N

12 kind of strobe function

ECE R65 | EMC R10 | SAE J845

LED-4N

12 kind of strobe function

ECE R65 | EMC R10 | SAE J845

LED-6N



Voltage range	12/24V Multivolt
LED type	3W High Power LED
Lens material	Clear polycarbonate
Base material	Aluminium
Approval	ECE R65 EMC R10
Ingress protection	IP65

synchronized function available , groups of led module can work together

LED STROBE LIGHT

8 kind of strobe function

ECE R65 EMC R10 SAE J845

LED-1801-3

12 kind of strobe function

ECE R65 EMC R10 SAE J845

LED-1801-4

12 kind of strobe function

ECE R65 EMC R10 SAE J845

LED-1801-6



Voltage range	12/24V Multivolt
LED type	3W High Power LED
Lens material	Clear polycarbonate
Base material	Aluminium
Mounting	Screw mount
Warranty	Five years
Approval	ECE R65 EMC R10
Ingress protection	IP65

LED STROBE LIGHT

8 kind of strobe function

ECE R65 EMC R10 SAE J845

LED-3X

12 kind of strobe function

ECE R65 EMC R10 SAE J845

LED-4X

12 kind of strobe function

ECE R65 EMC R10 SAE J845

LED-6X

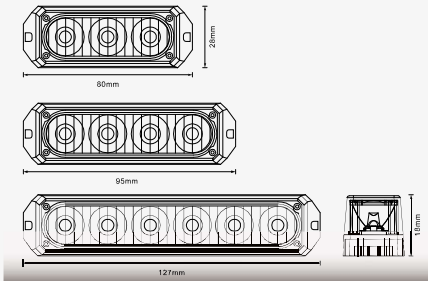

Voltage range	12/24V Multivolt	
Model number	LED-3X	3x3W High Power LED
	LED-4X	4x3W High Power LED
	LED-6X	6x3W High Power LED
LED type	3-Watt	
Lens material	Clear polycarbonate	
Base material	Aluminium	
Mounting	Screw mount	
Warranty	Five years	
Approval	ECE R65	EMC R10
Ingress protection	IP65	

LED STROBE LIGHT

LED STROBE LIGHT

8 kind of strobe function

ECE R65 EMC R10 SAE J845

LED-3R

12 kind of strobe function

ECE R65 EMC R10 SAE J845

LED-4R

12 kind of strobe function

ECE R65 EMC R10 SAE J845

LED-6R



Voltage range	12/24V Multivolt
LED type	3W High Power LED
Lens material	Clear polycarbonate
Base material	Aluminium
Mounting	Screw mount
Warranty	Five years
Approval	ECE R65 EMC R10
Ingress protection	IP65

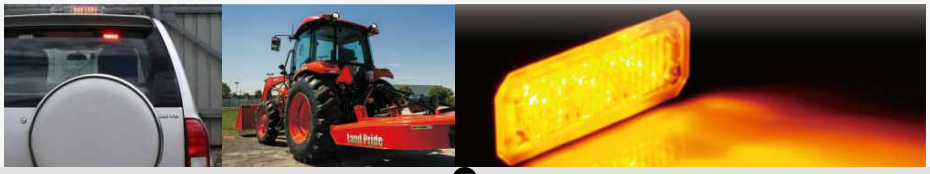

LED STROBE LIGHT

8 kind of strobe function

ECE R65 EMC R10 SAE J845

LED-3

12 kind of strobe function

ECE R65 EMC R10 SAE J845

LED-4

12 kind of strobe function

ECE R65 EMC R10 SAE J845

LED-6



Voltage range	12/24V Multivolt
LED type	3W High Power LED
Lens material	Clear polycarbonate
Base material	Aluminium
Mounting	Screw mount
Warranty	Five years
Approval	ECE R65 EMC R10
Ingress protection	IP65

LED STROBE LIGHT

8 kind of strobe function

R10 E9 10R 05.11935

ECE R65 EMC R10 **SAE J845**



LED-3S

12 kind of strobe function

R65 XA1 E9 00 1655
R10 E9 10R 05.11935

ECE R65 EMC R10 **SAE J845**



LED-4S

8 kind of strobe function

R10 E9 10R 05.11935

ECE R65 EMC R10 **SAE J845**



LED-3R

Voltage range	**12/24V Multivolt**
LED type	**3W High Power LED**
Lens material	**Clear polycarbonate**
Base material	**Aluminium**
Mounting	**Screw mount**
Warranty	**Five years**
Approval	**ECE R65 EMC R10**
Ingress protection	**IP65**

POWER LED LIGHT HEAD

R65 XA1 E9 00. 1867

11 function

ECE R65 EMC R10 **SAE J845**

LED-6M



Voltage range	**12/24V Multivolt**
LED type	**6x3W High Power LED**
Speed	**125+/-1 rpm**
Lens material	**PC**
Base material	**Aluminium**
Approval	**ECE R65 EMC R10**
Ingress protection	**IP65**

LED STROBE LIGHT

Description

LED-80 Headlight Tail Light LED hideaway unit can be used for internal mount in a 1" hole of your headlight and tail light housing.
This hideaway strobe light creates considerable light output, extremely bright and easy to install.
Working at DC 12V

Color : Amber & White,Amber,Red,White,Blue,Red & White(Please choose your color at the bottom)

Features:

Generation III high power LED, Hide-away light
Pre-programmed multiple flash patterns
Alternating or simultaneous flashing available

Technical Specifications:

8 PCS of 3 Watt LEDs
19 Flash Patterns
Mounts into a 1" hole of the headlight and tail light housing of any vehicle.

Wiring

RED: + 12V DC (Fuse@ 3A)
BLACK: - GROUND Connect to Ground vehicle chassis
YELLOW Pattern Selection
To select Flash pattern, apply Yellow to red, Less than 1 second for next pattern
About 3-5 seconds for steady burn, more than 5 seconds to turn off
White: Synchronization
Connect White wire of all heads together for synchronization
All heads must be on same flash pattern to be able to sync

LED-80-2

LED-80-4

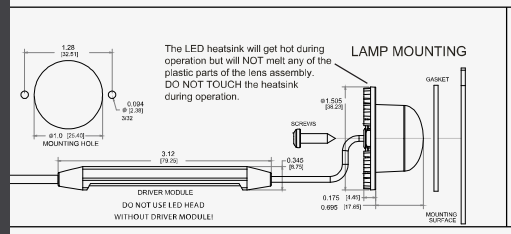

FIGURE 1

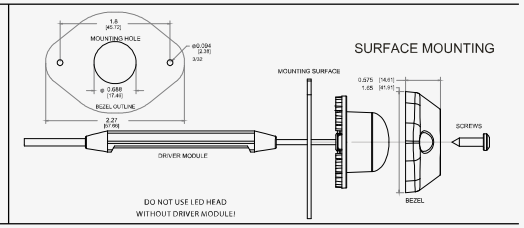

FIGURE 2

LED STROBE LIGHT

Description

LED-80 Headlight Tail Light LED hideaway unit can be used for internal mount in a 1" hole of your headlight and tail light housing.
This hideaway strobe light creates considerable light output, extremely bright and easy to install.
Working at DC 12V

Color : Amber & White,Amber,Red,White,Blue,Red & White(Please choose your color at the bottom)

Features:

Generation III high power LED, Hide-away light
Pre-programmed multiple flash patterns
Alternating or simultaneous flashing available

Technical Specifications:

8 PCS of 3 Watt LEDs
19 Flash Patterns
Mounts into a 1" hole of the headlight and tail light housing of any vehicle.

Wiring

RED: + 12V DC (Fuse@ 3A)
BLACK: - GROUND Connect to Ground vehicle chassis
YELLOW Pattern Selection
To select Flash pattern, apply Yellow to red, Less than 1 second for next pattern
About 3-5 seconds for steady burn, more than 5 seconds to turn off
White: Synchronization
Connect White wire of all heads together for synchronization
All heads must be on same flash pattern to be able to sync

LED-80-6

6x8 PCS of 3 Watt LEDs

LED-80-8

8x8 PCS of 3 Watt LEDs

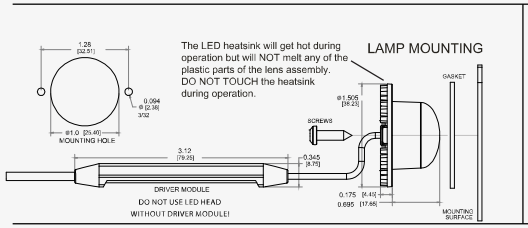

FIGURE 1

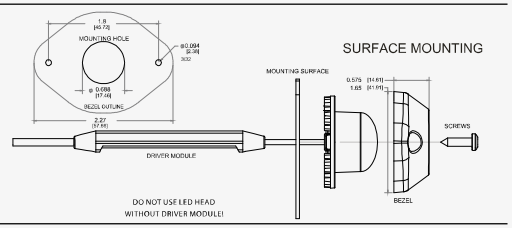

FIGURE 2

112043

112044

112045

112046

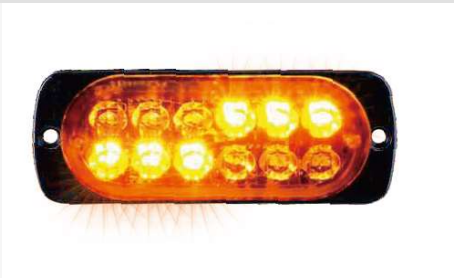

LED type	**High Power LED**
Lens material	**Clear polycarbonate**
Base material	**Aluminium**
Ingress protection	**IP67**

112047

112048

112049

112050

LED type	**High Power LED**
Lens material	**Clear polycarbonate**
Base material	**Aluminium**
Ingress protection	**IP67**

LED STROBE LIGHT

112051

12/24VDC Amber + Red Blue + White



L-4A

1W*4pieces power LED

12/24VDC

L-4B

SMD LED

12/24VDC

L-6A

1W*6pieces power LED

12/24VDC

Installationaccessories.

No.L-4R

No.L-4M

LED STROBE LIGHT

112042-3

3x2 3W High Power LED

12VDC Amber + Red Blue + White



LED type	3W High Power LED
Function	8Kind of Strobe Mode
Housing Material	Aluminium
Mounting Mode	BY SCREW
Ingress protection	IP67

112042-4

4x2 3W High Power LED

12VDC Amber + Red Blue + White



LED type	3W High Power LED
Function	
Housing Material	Aluminium
Mounting Mode	BY SCREW
Ingress protection	IP67

112042-6

6x2 3W High Power LED

12VDC Amber + Red Blue + White



LED type	3W High Power LED
Function	12Kind of Strobe Mode
Housing Material	Aluminium
Mounting Mode	BY SCREW
Ingress protection	IP67

112019

12VDC Amber + Red Blue + White

LED type	3W High Power LED
Function	Multi flashing pattern
Housing Material	Aluminium
Mounting Mode	BY SCREW
Ingress protection	IP67

112020

12VDC Amber + Red Blue + White

LED type	3W High Power LED
Function	8Kind of Strobe Mode
Housing Material	Aluminium
Mounting Mode	BY SCREW
Ingress protection	IP67

112021

12VDC Amber + Red Blue + White

LED type	3W High Power LED
Function	8Kind of Strobe Mode
Housing Material	Aluminium
Mounting Mode	BY SCREW
Ingress protection	IP67

112022

12VDC Amber + Red Blue + White

LED type	1W High Power LED
Function	8Kind of Strobe Mode
Housing Material	Aluminium
Mounting Mode	BY SCREW
Ingress protection	IP67

LED STROBE LIGHT

112023

12VDC Amber + Red Blue + White

LED type	1W High Power LED
Function	8Kind of Strobe Mode
Housing Material	Aluminium
Mounting Mode	BY SCREW
Ingress protection	IP67

112024

12VDC Amber + Red Blue + White

LED type	3W High Power LED
Function	8Kind of Strobe Mode
Housing Material	Aluminium
Mounting Mode	BY SCREW
Ingress protection	IP67

112031

12VDC Amber + Red Blue + White

LED type	1W High Power LED
Function	8Kind of Strobe Mode
Housing Material	Aluminium
Mounting Mode	BY SCREW
Ingress protection	IP67

112032

12VDC Amber + Red Blue + White

LED type	0.5W High Power LED
Function	8Kind of Strobe Mode
Housing Material	Aluminium
Mounting Mode	BY SCREW
Ingress protection	IP67

LED STROBE LIGHT

112034

12VDC Amber + Red Blue + White

LED type	3W High Power LED
Function	8Kind of Strobe Mode
Housing Material	Aluminium
Mounting Mode	BY SCREW
Ingress protection	IP67

112035

12VDC Amber + Red Blue + White

LED type	3W High Power LED
Function	8Kind of Strobe Mode
Housing Material	Aluminium
Mounting Mode	BY SCREW
Ingress protection	IP67

112036

12VDC Amber + Red Blue + White

LED type	1W High Power LED
Function	8Kind of Strobe Mode
Housing Material	Aluminium
Mounting Mode	BY SCREW
Ingress protection	IP67

112037

12VDC Amber + Red Blue + White

LED type	0.5W High Power LED
Function	8Kind of Strobe Mode
Housing Material	Aluminium
Mounting Mode	BY SCREW
Ingress protection	IP67

LED STROBE LIGHT

112038

12VDC Amber + Red Blue + White

LED type	2W High Power LED
Function	8Kind of Strobe Mode
Housing Material	Aluminium
Mounting Mode	BY SCREW
Ingress protection	IP67

112040

12VDC Amber + Red Blue + White

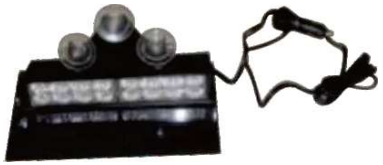

LED type	High Power LED
Function	8Kind of Strobe Mode
Housing Material	Aluminium
Mounting Mode	BY SCREW
Ingress protection	IP67

112041

12VDC Amber + Red Blue + White

LED type	3W High Power LED
Function	8Kind of Strobe Mode
Housing Material	Aluminium
Mounting Mode	BY SCREW
Ingress protection	IP67

112042

12VDC Amber + Red Blue + White

LED type	3W High Power LED
Function	8Kind of Strobe Mode
Housing Material	Aluminium
Mounting Mode	BY SCREW
Ingress protection	IP67

LED WARNING STROBE BAR LIGHT

JC60111 Series

LED type	3W High Power LED, 4LEDS Per Module
Function	7kind of Flashing patterns
Housing Material	Aluminium
Mounting Mode	BY SCREW
Ingress protection	IP65

Dimension	49*65*250mm	49*65*360mm	49*65*470mm	49*65*580mm	49*65*690mm	49*65*800mm	49*65*910mm
Module Quantity	2	3	4	5	6	7	8

JC60127 Series

LED type	3W High Power LED, 6LEDS Per Module
Function	7kind of Flashing patterns
Housing Material	Aluminium
Mounting Mode	BY SCREW
Ingress protection	IP65

Dimension	49*65*325mm	49*65*485mm	49*65*645mm	49*65*805mm	49*65*965mm	49*65*1125mm	49*65*1285mm
Module Quantity	2	3	4	5	6	7	8

JC60812COB Series

LED type	4W High Power COB LED, 1LEDS Per Module
Function	7kind of Flashing patterns
Housing Material	Aluminium
Mounting Mode	BY SCREW
Ingress protection	IP65

Dimension	49*65*250mm	49*65*360mm	49*65*470mm	49*65*580mm	49*65*690mm	49*65*800mm	49*65*910mm
Module Quantity	2	3	4	5	6	7	8

JC60127D Series

LED type	3W High Power LED, 6LEDS Per Module
Function	7kind of Flashing patterns
Housing Material	Aluminium
Mounting Mode	BY SCREW
Ingress protection	IP65

Dimension	49*65*325mm	49*65*485mm	49*65*645mm	49*65*805mm	49*65*965mm	49*65*1285mm
Module Quantity	4	6	8	10	12	16

EMERGENCY LED LIGHT BAR

R65 XA1 E9 00 1713
R10 E9 10R 03 11934

With bracket type

LTF-17L

With bracket type

LTF-17LS

With magenet base

LTF-17L

With magenet base

LTF-17LS

With single bolt base

LTF-17L

With single bolt base

LTF-17LS

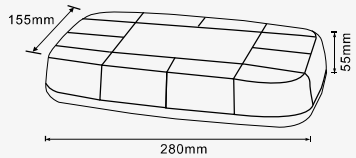

Voltage range	12/24V Multivolt
Function	Rotating&Flashing
Lens material	PC
Base material	ABS
Approval	EMC R10
Ingress protection	IP65

R65 XA1 E9 00 1713
R10 E9 10R 03 11934

EMERGENCY LED LIGHT BAR

The original Bar
This compact unit bridges the gap between beacon and light bars, offering the visibility and performance of a light bars ,with the ease of use and value of a beacon. Available in 8kind of flashing flashing patterns

- **3W High power LED, encapsuled by PC lens, ensure the perfect lumen output and perfect beam pattern**
- **PC Lens, good performance in transmittance, Anti ultraviolet.**
- **DOT certificate approvaled**
- **Long life-span & Low power consumption**



LTF-17L With magenet base

LTF-17L With bracket type

LTF-17L With single bolt base

MINI LED LIGHT BAR

R65 TA1 E9 00 1686
R10 E9 10R 03 11934

With power magenet 3Wx14PCS

LTF-18L

With power magenet SMD2835x45PCS

LTF-18LS

AC-018
turn on/off the power supply
shitch the function of waning light

AC-011
turn on/off the power supply
shitch the function of waning light

AC-013
socket and power switch

Rubber suction cap
protects paintwork

With pole 3Wx14PCS

LTF-18L

With pole SMD2835x45PCS

LTF-18LS

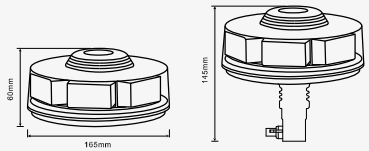

- Hight power LED,encapsuled by PC lens,ensure the perfect lumen output and perfect beam pattern
- PC lens,good performance in transmittance,Anti ultraviolet.
- DOT certificate approval, and E-Mark Certificate
- Long life-span&Low power consumption

The original Bar.This compact unit bridges the gap between beacon and light bars, offering the visibility andperformance of a light bar, with the ease of use and value of a beacon. Available in rotator or double flash

Voltage range	**12/24V Multivolt**
Model number	**High Power LED**
Function	**Rotating&Flashing**
Lens material	**PC**
Base material	**ABS**
Approval	**EMC R65 EMC R10**
Ingress protection	**IP65**

EMERGENCY LED LIGHT BAR

R65 XA1 E9 00 1713
R10 E9 10R 03 11934

With bracket type

LTF-19S

With bracket type

LTF-19H

With bracket type

LTF-19L

With magenet base

LTF-19S

With magenet base

LTF-19H

With magenet base

LTF-19L

With single bolt base

LTF-19S

With single bolt base

LTF-19H

With single bolt base

LTF-19L

- The original Bar
- This compact unit bridges the gap between beacon and light bars, offering the visibility and performance of a light bars ,with the ease of use and value of a beacon.
- Available in rotating or double flashing
- Light bar with LED light source is the tendency

- SMD light source-120degree beam angel
- Aluminum radiator, good performance in heat radiation,protect LED chips & electronic component from over-heat
- Reflector guarantee the beam pattern satisfy the requirement of R65 of E-mark
- Long life-span & Low power consumption

Voltage range	**12/24V Multivolt**
Function	**Rotating&Flashing**
Lens material	**PC**
Base material	**ABS**
Approval	**ECE R65 EMC R10**
Ingress protection	**IP65**

MINI LED LIGHT BAR

R10 E9 10R 03 11934

With bracket type

LTF-23L

With magenet base

LTF-23L

With single bolt base

LTF-23L



- Hight power LED,encapsuled by PC lens,ensure the perfect lumen output and perfect beam pattern
- PC lens,good performance in transmittance,Anti ultraviolet.
- DOT certificate approval, and E-Mark Certificate
- Long life-span&Low power consumption

The original Bar.This compact unit bridges the gap between beacon and light bars, offering the visibility andperformance of a light bar, with the ease of use and value of a beacon. Available in rotator or double flash

Voltage range	**12/24V Multivolt**
Model number	**3W High Power LED**
Function	**Rotating&Flashing**
Lens material	**PC**
Base material	**ABS**
Approval	**EMC R10**
Ingress protection	**IP65**

EMERGENCY LED LIGHT BAR

*Light Source Upgraded *More bright*More long life-span

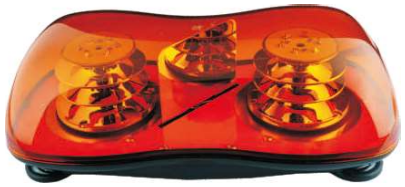

ECE R65 EMC R10

LTF-26S

*Light Source Upgraded *More bright*More long life-span

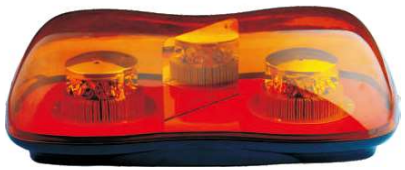

ECE R65 EMC R10

LTF-26H

*Light Source Upgraded *More bright*More long life-span

ECE R65 EMC R10

ECE R65 EMC R10

LTF-26B-LED

LTF-26D-XENON



The original Bar.This compact unit bridges the gap between beacon and lightbars,offering the visibility andperformance of alighrbar,with the ease of use and valueof abeacon.
Available in rotator or double flash Xenon Strobe and High power LED Type

Voltage range	**12/24V Multivolt**
Approval	**ECE R65 EMC R10**
Ingress protection	**IP65**

MINI LED LIGHT BAR

LTF-29S With single bolt base

ECE R65 EMC R10

LTF-29S With magenet base

ECE R65 EMC R10

LTF-29S With bracket type

ECE R65 EMC R10

LTF-29S With bracket type

ECE R65 EMC R10



- Hight power LED,encapsuled by PC lens,ensure the perfect lumen output and perfect beam pattern
- PC lens,good performance in transmittance,Anti ultraviolet.
- DOT certificate approval, and E-Mark Certificate
- Long life-span&Low power consumption

The original Bar.This compact unit bridges the gap between beacon and light bars, offering the visibility andperformance of a light bar, with the ease of use and value of a beacon.
Available in rotator or double flash

Voltage range	**12/24V Multivolt**
Model number	**3W High Power LED**
Function	**Rotating&Flashing**
Lens material	**PC**
Base material	**Aluminium**
Approval	**ECE R65 EMC R10**
Ingress protection	**IP65**

EMERGENCY LED LIGHT BAR

MINI LED LIGHT BAR

R65 E9 65R00/10.6109 00

Transparent lens

ECE R65 | EMC R10 | SAE J845

LTF-43L

with bracket type

with magenet base

with single bolt base

Amber lens

ECE R65 | EMC R10 | SAE J845

LTF-43L

Red lens

ECE R65 | EMC R10 | SAE J845

LTF-43L

Size



- Hight power LED,encapsuled by PC lens,ensure the perfect lumen output and perfect beam pattern
- PC lens,good performance in transmittance,Anti ultraviolet.
- DOT certificate approval, and E-Mark Certificate
- Long life-span&Low power consumption

The original Bar.This compact unit bridges the gap between beacon and light bars, offering the visibility andperformance of a light bar, with the ease of use and value of a beacon. Available in rotator or double flash

Voltage range	12/24V Multivolt
Model number	3W High Power LED
Function	Rotating&Flashing
Lens material	PC
Base material	ABS
Approval	ECE R65 EMC R10
Ingress protection	IP65

SUPER-THIN MINI LED LIGHT BAR

R65 E9 65R00/10.6109 00

Transparent lens

ECE R65 | EMC R10 | SAE J845

LTF-42L

with bracket type

with magenet base

with single bolt base

Amber lens

ECE R65 | EMC R10 | SAE J845

LTF-42L

Red lens

ECE R65 | EMC R10 | SAE J845

LTF-42L

Size



- Hight power LED,encapsuled by PC lens,ensure the perfect lumen output and perfect beam pattern
- PC lens,good performance in transmittance,Anti ultraviolet.
- DOT certificate approval, and E-Mark Certificate
- Long life-span&Low power consumption

The original Bar.This compact unit bridges the gap between beacon and light bars, offering the visibility andperformance of a light bar, with the ease of use and value of a beacon. Available in rotator or double flash

Voltage range	12/24V Multivolt
Model number	3W High Power LED
Function	Rotating&Flashing
Lens material	PC
Base material	ABS
Approval	ECE R65 EMC R10
Ingress protection	IP65

EMERGENCY LED LIGHT BAR

R10 E9 10R 03 11934

LED

- Light Source Upgraded
- More bright
- More long life-span
- 3W High Power LED

EMC R10

LTF-25L

HALOGEN

EMC R10

LTF-25T



The original Bar.This compact unit bridges the gapbetween beacon and lightbars,offering the visibility and performance of alighrbar,with the ease of use and valueof abeacon. Available in rotator or double flash Xenon Strobe and High power LED Type

Voltage range	12/24V Multivolt
Dimensions	Height:140mm Length:1000mm,1200mm,1500mm Width:210mm

EMERGENCY LED LIGHT BAR

R65 TA1 E9 00.1712
R10 E9 10R 03.6725

Multi function

ECE R65 EMC R10

LTF-7L-600mm

Multi function

ECE R65 EMC R10

LTF-7L-900mm

Multi function

ECE R65 EMC R10

LTF-7L-1200mm



Select LED Color:

✔ Red ✔ Amber ✔ White ✔ Amber/White ✔ Red/Blue

Voltage range	12/24V Multivolt
Model number	LTF-7L-600mm 3W High Power LED
	LTF-7L-900mm 3W High Power LED
	LTF-7L-1200mm 3W High Power LED
LED type	3-Watt
Lens material	Clear polycarbonate
Base material	Magnetic Base+Cigar Plug Bolt Base+Wire
Approval	ECE R65 EMC R10
Ingress protection	IP65

EMERGENCY LED LIGHT BAR

EMERGENCY LED LIGHT BAR

R10 E9 10R 03 11934

Clear color lens

LTF-30L-C

Amber color lens

LTF-30L-A

socket and multi-function



*XL6 Minibar 10 ultra bright LED modules
*Plug/magnetic mounting option
*Permanent Bracket mounting option
Features
*Super Wide Angle GEN 3 LED Optics
*Built-in 26 Brilliant Selectable Flash Patterns
*Flash Patterns Remotely Selectable With Magnetic Card
*Comes standard with cigarette lighter plug
*Draws only 2.9 Amps max!!
*Multi-Unit Synchronization
*Lens Colour: Amber, Red
*Length: 16.6" (422mm)
*Height: 2.55" (65mm)
*12 Month Warranty
*Also available in RED
Specifications
*Voltage: 10~30VDC
*Current: Max. 3.5 Amps
*Bulb: 1W GEN 3 x 30pcs
Applications
Highway/Utility Maintenance, Recovery, Plant & Contracting, Mining, Forestry.

LTF-47L-300mm

LTF-47L-600mm

LTF-47L-1200mm



- 3W High power LED, encapsuled by PC lens, ensure the perfect lumen output and perfect beam pattern
- PC Lens, good performance in transmittance, Anti ultraviolet.
- DOT certificate approvaled
- Long life-span & Low power consumption

Voltage range	12/24V Multivolt	
Model number	LTF-47L-300mm	3W High Power LED
	LTF-47L-600mm	3W High Power LED
	LTF-47L-1200mm	3W High Power LED
LED type	3-Watt	
Lens material	Clear polycarbonate	
Base material	Magnetic Base + Cigar Plug Bolt Base + Wire	
Ingress protection	IP65	

EMERGENCY LED LIGHT BAR

12-80V

* Available in 87, 97, 102, 107 dB sound levels
* -30°C to 77°C extreme temperature reliability

ES97
Multivoltage 12-36Vdc

ES97A
Multivoltage 12-80Vdc

12-80V

* Available in 87, 97, 102, 107 dB sound levels
* -30°C to 77°C extreme temperature reliability

ES47D
Multivoltage 12-36Vdc

ES47-1D
Multivoltage 12-80Vdc

ES47-2D
Multivoltage 12-24Vdc

ES47-3D
Multivoltage 12-48Vdc

12-80V

* Available in 87, 97, 102, 107 dB sound levels
* -30°C to 77°C extreme temperature reliability

ES46D
Multivoltage 12-36Vdc

ES46-1D
Multivoltage 12-80Vdc

ES46-2D
Multivoltage 12-24Vdc

ES46-3D
Multivoltage 12-48Vdc

12-80V

* Available in 87, 97, 102, 107 dB sound levels
* -30°C to 77°C extreme temperature reliability

ES85
Multivoltage 12-36Vdc

ES85A
Multivoltage 12-80Vdc



12-80V

* Available in 87, 97, 102, 107 dB sound levels
* -30°C to 77°C extreme temperature reliability

ES55
Multivoltage 12-36Vdc

ES55A
Multivoltage 12-80Vdc

12-80V

* Available in 87, 97, 102, 107 dB sound levels
* -30°C to 77°C extreme temperature reliability

ES97S
Multivoltage 12-36Vdc

ES97SA
Multivoltage 12-80Vdc

12-80V

* Available in 87, 97, 102, 107 dB sound levels
* -30°C to 77°C extreme temperature reliability

ES124
Multivoltage 12-36Vdc

ES124A
Multivoltage 12-80Vdc

12-80V

* Available in 87, 97, 102, 107 dB sound levels
* -30°C to 77°C extreme temperature reliability

ES121

12-80V

* Available in 87, 97, 102, 107 dB sound levels
* -30°C to 77°C extreme temperature reliability

ES136

BACKUP ALARM

12-80V

Backup Alarm For Heavy Duty Vehicle

IP65 RoHS

* Available in 87, 97, 102, 107 dB sound levels
* -30°C to 77°C extreme temperature reliability

ES135

12-110V

Backup Alarm For Heavy Duty Vehicle

IP65 RoHS

* Available in 87, 97, 102, 107 dB sound levels
* -30°C to 77°C extreme temperature reliability

ES138

12-80V

IP65 RoHS

* Available in 87, 97, 102, 107 dB sound levels
* -30°C to 77°C extreme temperature reliability

ES140

12-48V

Backup Alarm For Heavy Duty Vehicle

IP65 RoHS

* Available in 87, 97, 102, 107 dB sound levels
* -30°C to 77°C extreme temperature reliability

ES142

BACKUP ALARM
LED WARNING LIGHT

LED WARNING LIGHT
BACKUP ALARM

LED WARNING LIGHT
(P105 ~ P 111)

BACKUP ALARM
(P91 ~ P 93)

LED WARNING LIGHT
(P 112 ~P115)

LED WARNING LIGHT

LED WARNING LIGHT
(P97 ~ P 103)

LED WARNING LIGHT
(P104 ~ P 107)

WARNING LIGHT

12-24V | RoHS Certificate | IP65 | LED | EMC R10



Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Clear

①

Car Cigarette Lighter Power Plug Adapter w/ On / Off Switch

②

Universal Car Cigarette Lighter Power Plug Adapter

Mounting

Screw Base + Two Wire | Magnetic Base + Spring Cable & Cigar Plug

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Color Available	Light Source	Mounting
WL01		LED	
WL01		LED	

WARNING LIGHT

12-24V | RoHS Certificate | IP65 | LED | EMC R10



Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Clear

①

Car Cigarette Lighter Power Plug Adapter w/ On / Off Switch

②

Universal Car Cigarette Lighter Power Plug Adapter

Mounting

Screw Base + Two Wire | Magnetic Base + Spring Cable & Cigar Plug

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Color Available	Light Source	Mounting
WL06		LED	
WL06		LED	

WARNING LIGHT

WARNING LIGHT

12-24V | RoHS Certificate | IP65 | LED | EMC R10



Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Clear

①

Car Cigarette Lighter Power Plug Adapter w/ On / Off Switch

②

Universal Car Cigarette Lighter Power Plug Adapter

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Color Available	Light Source	Mounting
WL04		LED	

WARNING LIGHT

12-24V | RoHS Certificate | IP65 | LED | EMC R10



Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Clear

①

Car Cigarette Lighter Power Plug Adapter w/ On / Off Switch

②

Universal Car Cigarette Lighter Power Plug Adapter

Mounting

Screw Base + Two Wire

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Color Available	Light Source	Mounting
WL08		LED	

WARNING LIGHT

WARNING Light

12-24V | RoHS Certificate | IP65 | XENON | HALOGEN | EMC R10



Dual Flashing | Single Flashing | Rotating

Function Available

Rotating

Function Available

Lens Colors Available
Amber,Red,Blue,Green,Clear

① Car Cigarette Lighter Power Plug Adapter w/ On / Off Switch **AC-017**

② Universal Car Cigarette Lighter Power Plug Adapter **AC-010**

③ socket and power switch **AC-013**

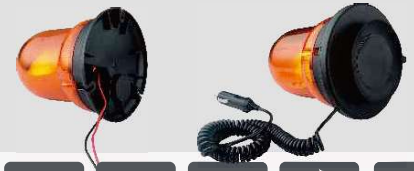

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Color Available	Light Source	Mounting
WL05	● ● ● ● ○	H1	
WL07		XENON	
WL14		H1	

WARNING LIGHT

12-24V | RoHS Certificate | IP65 | LED | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Single Flashing

Function Available

Lens Colors
Amber,Red,Blue,Clear

① Car Cigarette Lighter Power Plug Adapter w/ On / Off Switch **AC-017**

② Universal Car Cigarette Lighter Power Plug Adapter **AC-010**



Cage-003

Mounting

Screw Base + Two Wire

Magnetic Base + Spring Cable & Cigar Plug

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Color Available	Light Source	Mounting
WL27	● ● ● ● ○	LED	
WL27		LED	
WL27DC	◐ ◐ ◐ ◐ ◐	LED	

WARNING LIGHT

WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | LED | EMC R10



Dual Flashing

Function Available

Lens Colors
Amber,Red,Blue,Clear

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Color Available	Light Source	Mounting
WL29		LED	

WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | LED | EMC R10



Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green

①

Car Cigarette Lighter Power Plug Adapter w/ On / Off Switch **AC-017**

②

Universal Car Cigarette Lighter Power Plug Adapter **AC-010**

Mounting

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Color Available	Light Source	Mounting
WL55		LED	

WARNING LIGHT

WARNING LIGHT

12-24V | RoHS Certificate | IP65 | LED | EMC R10



Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green

①

Car Cigarette Lighter Power Plug Adapter w/ On / Off Switch **AC-017**

②

Universal Car Cigarette Lighter Power Plug Adapter **AC-010**

Mounting

Magnetic Base + Spring Cable & Cigar Plug

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Color Available	Light Source	Mounting
WL57		LED	
WL57		LED	
WL57DC		LED	

WARNING LIGHT

12-24V | RoHS Certificate | IP65 | LED | XENON | EMC R10



Dual Flashing | Single Flashing | Rotating

Function Available

Rotating

Function Available

Lens Colors
Amber,Red,Blue,Green

①

Car Cigarette Lighter Power Plug Adapter w/ On / Off Switch

②

Universal Car Cigarette Lighter Power Plug Adapter

Mounting

Screw Base + Two Wire

Magnetic Base + Spring Cable & Cigar Plug

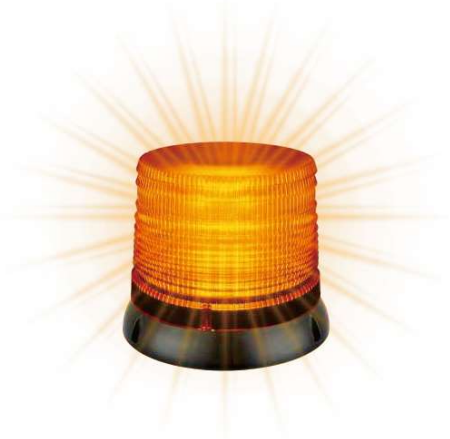

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Color Available	Light Source	Mounting
WL61		LED	
WL61		LED	
WL61DC		LED	

WARNING LIGHT

12-24V | RoHS Certificate | IP65

LED | XENON | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Single Flashing

Function Available



Lens Colors
Amber,Red,Blue,Clear

①

Car Cigarette Lighter Power Plug Adapter w/ On / Off Switch **AC-017**

②

Universal Car Cigarette Lighter Power Plug Adapter **AC-010**

Mounting

Screw Base + Two Wire

Magnetic Base + Spring Cable & Cigar Plug

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Color Available	Light Source	Mounting
WL69		LED	
WL69		LED	
WL69DC		LED	

WARNING Light

12-24V | RoHS Certificate | IP65

XENON | LED | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Single Flashing

Function Available



Lens Colors Available
Amber,Red,Blue,Green,Clear

①

Car Cigarette Lighter Power Plug Adapter w/ On / Off Switch **AC-017**

②

Universal Car Cigarette Lighter Power Plug Adapter **AC-010**

③

socket and power switch **AC-013**

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Color Available	Light Source	Mounting
WL100		H1	
WL101		LED	

WARNING LIGHT

WARNING LIGHT

12-24V | RoHS Certificate | IP65

LED | HALOGEN | EMC R10

Belt Drive

Dual Flashing | Single Flashing | Rotating

Function Available

Rotating

Function Available

Lens Colors
Amber,Red,Blue,Clear



Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Color Available	Light Source	Mounting
WL102LED		LED	
WL102		H1	

WARNING LIGHT

12-24V | RoHS Certificate | IP65

HALOGEN | EMC R10

Rotating

Function Available



Gear Motor

Lens Colors Available
Amber,Red,Blue,Green,Clear

① Car Cigarette Lighter Power Plug Adapter w/ On / Off Switch **AC-017**

② Universal Car Cigarette Lighter Power Plug Adapter **AC-010**

③ socket and power switch **AC-013**

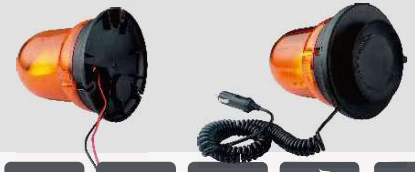

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Color Available	Light Source	Mounting
WL111		LED	
WL112		LED	

WARNING LIGHT

12-24V | RoHS Certificate | IP65

EMC R10

LED | POWR LED | XENON



Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Clear

①

Car Cigarette Lighter Power Plug Adapter w/ On / Off Switch **AC-017**

②

Universal Car Cigarette Lighter Power Plug Adapter **AC-010**

③

AC-013

AC-017

AC-016

MP-001

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

XENON

WL115A
with H1 bulb

XENON

WL115
with H1 bulb

XENON

WL108
with H1 bulb

LED

WL281
with nomal LED

XENON
LED

WL121
with xenon or LED type

POWR LED

WL282
with power LED

POWR LED

WL283
with power and DIN flexible base

XENON

WL280
with H1 bulb and DIN flexible base

WARNING LIGHT

12-24V | RoHS Certificate | IP65

LED | XENON | EMC R10



Dual Flashing | Single Flashing | Rotating

Function Available

Single Flashing

Function Available

Lens Colors
Amber,Green,Blue,Red

①

Car Cigarette Lighter Power Plug Adapter w/ On / Off Switch **AC-017**

②

Universal Car Cigarette Lighter Power Plug Adapter **AC-010**

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Color Available	Light Source	Mounting
WL190LED		LED	
WL190LED		LED	
WL190		XENON	
WL190		XENON	

WARNING LIGHT

12-24V | RoHS Certificate | IP65

LED | XENON | EMC R10



Dual Flashing | Single Flashing | Rotating

Function Available

Single Flashing

Function Available

Lens Colors Available
Amber,Red,Blue,Green,Clear

①

Car Cigarette Lighter Power Plug Adapter w/ On / Off Switch **AC-017**

②

Universal Car Cigarette Lighter Power Plug Adapter **AC-010**

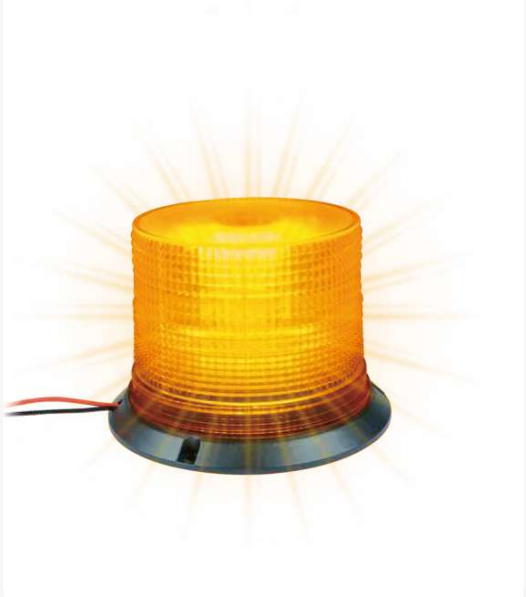

Mounting

Screw Base + Two Wire

Magnetic Base + Spring Cable & Cigar Plug

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Color Available	Light Source	Mounting
WL203LED		LED	
WL203LED		LED	
WL203DC		LED	
WL203DC		LED	

WARNING LIGHT

12-24V | RoHS Certificate | IP65

LED | XENON | EMC R10



Dual Flashing | Single Flashing | Rotating

Function Available

Single Flashing

Function Available

Lens Colors
Amber,Green,Blue,White

①

Car Cigarette Lighter Power Plug Adapter w/ On / Off Switch **AC-017**

②

Universal Car Cigarette Lighter Power Plug Adapter **AC-010**

Mounting

Screw Base + Two Wire

Magnetic Base + Spring Cable & Cigar Plug

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Color Available	Light Source	Mounting
WL205LED		LED	
WL205LED		LED	
WL205DC		LED	
WL205DC		LED	

WARNING LIGHT

12-24V | RoHS Certificate | IP65

LED | XENON | EMC R10



Dual Flashing | Single Flashing | Rotating

Function Available

Single Flashing

Function Available

Lens Colors
Amber,Green,Blue,Rde

①

Car Cigarette Lighter Power Plug Adapter w/ On / Off Switch **AC-017**

②

Universal Car Cigarette Lighter Power Plug Adapter **AC-010**

Mounting

Screw Base + Two Wire

Magnetic Base + Spring Cable & Cigar Plug

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Color Available	Light Source	Mounting
WL206LED		LED	
WL206LED		LED	
WL206DC		LED	
WL206DC		LED	

WARNING LIGHT

12-24V | RoHS Certificate | IP65

EMC R65 | EMC R10

HALOGEN | POWR LED | XENON

Belt Drive

Rotating

Function Available



Lens Colors
Amber,Red,Blue,Clear

①

Car Cigarette Lighter Power Plug Adapter w/ On / Off Switch **AC-017**

②

Universal Car Cigarette Lighter Power Plug Adapter **AC-010**

③

socket and power switch **AC-013**

AC-016

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

HALOGEN

WL245
with H1 bulb (with magnet)

HALOGEN

WL245
with H1 bulb,W/O magnet

XENON

WL245
with power xenon bulb

POWR LED

WL245
with power LED bulb

HALOGEN

WL271
with HI bulb

WARNING LIGHT

WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | LED | EMC R10

Amber+ Red

Blue+ Green

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Green,Blue,Red

①

Car Cigarette Lighter Power Plug Adapter w/ On / Off Switch **AC-017**

②

Universal Car Cigarette Lighter Power Plug Adapter **AC-010**

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Color Available	Light Source	Mounting
WL246		LED	
WL246		LED	

WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | LED | XENON | EMC R10



Dual Flashing | Single Flashing | Rotating

Function Available

Rotating

Function Available

Lens Colors
Amber,Green,Blue,Red

①

Car Cigarette Lighter Power Plug Adapter w/ On / Off Switch **AC-017**

②

Universal Car Cigarette Lighter Power Plug Adapter **AC-010**

Mounting

Screw Base + Two Wire

Magnetic Base + Spring Cable & Cigar Plug

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Color Available	Light Source	Mounting
WL247		LED	
WL247		LED	
WL247DC		LED	
WL247DC		LED	

WARNING LIGHT

WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | LED | XENON | EMC R10

Blue+ Green



Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Green,Blue,Red

①

Car Cigarette Lighter Power Plug Adapter w/ On / Off Switch **AC-017**

②

Universal Car Cigarette Lighter Power Plug Adapter **AC-010**

Mounting

Screw Base + Two Wire

Magnetic Base + Spring Cable & Cigar Plug

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Color Available	Light Source	Mounting
WL270LED	● ● ● ● ○	LED	
WL270LED		LED	
WL270	● ● ● ● ○	XENON	
WL270		XENON	

WARNING LIGHT

12-24V | RoHS Certificatte | IP65 | LED | EMC R10

Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Green,Blue,Red



Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

Item No.	Color Available	Light Source	Mounting
WL273	● ● ● ● ○	LED	

WARNING LIGHT

WARNING LIGHT

12-24V | RoHS Certificate | IP65 | LED | EMC R10

Blue+ Green

Amber+ Red



Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Green,Blue,Red

①

Car Cigarette Lighter Power Plug Adapter w/ On / Off Switch **AC-017**

②

Universal Car Cigarette Lighter Power Plug Adapter **AC-010**

Item No.	Color Available	Light Source	Mounting
WL274		LED	

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

WARNING LIGHT

12-24V | RoHS Certificate | IP65 | EMC R10

HALOGEN | POWR LED | XENON



Dual Flashing | Single Flashing | Rotating

Function Available

Lens Colors
Amber,Red,Blue,Clear

①

Car Cigarette Lighter Power Plug Adapter w/ On / Off Switch **AC-017**

②

Universal Car Cigarette Lighter Power Plug Adapter **AC-010**

③

socket and power switch **AC-013**

HALOGEN

WL281
with H1 bulb (with magnet)

HALOGEN

WL280
with H1 bulb,W/O magnet

XENON

WL282
with power xenon bulb

POWR LED

WL283
with power LED bulb

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

WARNING LIGHT

WARNING LIGHT

12-24V | RoHS Certificate | IP65 | HALOGEN | EMC R10

Gear Motor

Rotating

Function Available



Lens Colors
Amber,Green,Blue,Red

①

Car Cigarette Lighter Power Plug Adapter w/ On / Off Switch **AC-017**

②

Universal Car Cigarette Lighter Power Plug Adapter **AC-010**

WL302
with single bolt base

WL303
with flexible DIN base

Mounting

Screw Base + Two Wire

Magnetic Base + Spring Cable & Cigar Plug

Item No.	Color Available	Light Source	Mounting
WI300		Halogen	
WI300		Halogen	

Agriculture | Automotive | Construction | Industrial | Material

Mining | Power Sports | Railroad | Specialty | Truck & Bus

SIDE MARKER LIGHT
SQUARE LED TAIL LIGHT
LED TRUCK LIGHT
LED TRAILER LIGHT
TRAILER LIGHT BOARD

SIDE MARKER LIGHT
(P148)

SQUARE LED TAIL LIGHT
(P149 ~ P150)

LED TRUCK LIGHT
(P145)

SQUARE LED TAIL LIGHT
(P149 ~ P150)

LED TRAILER LIGHT
(P125 ~ P136)

TRAILER LIGHT BOARD
(P137 ~ P144)

LED Trailer Light

ITEM NO.	Mounting Style	
TB-56-LH(RH)	By Screw	Single Light

Specification

Voltage	DC12/24V
Light Source	LED
Housing Material	PC
Function	Rear Position/Direction Indicator/Rear Fog Light Brake Light/Reflector/Number Plate Light
Waterproof	IP67



Pipeline effect | L.E.D.S | DC12-24V DC INPUT | IP67 WATERPROOF | RoHS Certificatte AVAILABLE | E-MARK AVAILABLE

ITEM NO.	Mounting Style	
TB-56-M	By Magnetic Base	Right & Left Light

Specification

Voltage	DC12/24V
Light Source	LED
Housing Material	PC
Function	Rear Position/Direction Indicator/Rear Fog Light Brake Light/Reflector/Number Plate Light
Waterproof	IP67
Cable Length	Light to Light-2.5Meters Light to Plug-7.5Meters



Pipeline effect | 7PIN PLUG | L.E.D.S | DC12-24V DC INPUT | IP67 WATERPROOF | RoHS Certificatte AVAILABLE | E-MARK AVAILABLE

ITEM NO.	Mounting Style	
TB-56-S	By Screw	Right & Left Light

Specification

Voltage	DC12/24V
Light Source	LED
Housing Material	PC
Function	Rear Position/Direction Indicator/Rear Fog Light Brake Light/Reflector/Number Plate Light
Waterproof	IP67
Cable Length	Light to Light-2.5Meters Light to Plug-7.5Meters



Pipeline effect | 7PIN PLUG | L.E.D.S | DC12-24V DC INPUT | IP67 WATERPROOF | RoHS Certificatte AVAILABLE | E-MARK AVAILABLE

LED Trailer Light

ITEM NO.	Mounting Style	
TB-63-LH(RH)	By Screw	Single Light

Specification

Voltage	DC12/24V
Light Source	LED
Housing Material	PC
Function	Rear Position/Direction Indicator/Rear Fog Light Brake Light/Reflector/Reversing Light /Number Plate Light
Waterproof	IP67



L.E.D.S | DC12-24V DC INPUT | IP67 WATERPROOF | RoHS Certificatte AVAILABLE | E-MARK AVAILABLE

ITEM NO.	Mounting Style	
TB-63-M	By Magnetic Base	Right & Left Light

Specification

Voltage	DC12/24V
Light Source	LED
Housing Material	PC
Function	Rear Position/Direction Indicator/Rear Fog Light Brake Light/Reflector/Reversing Light /Number Plate Light
Waterproof	IP67
Cable Length	Light to Light-2.5Meters Light to Plug-7.5Meters



7PIN PLUG | L.E.D.S | DC12-24V DC INPUT | IP67 WATERPROOF | RoHS Certificatte AVAILABLE | E-MARK AVAILABLE

ITEM NO.	Mounting Style	
TB-63-S	By Screw	Right & Left Light

Specification

Voltage	DC12/24V
Light Source	LED
Housing Material	PC
Function	Rear Position/Direction Indicator/Rear Fog Light Brake Light/Reflector/Reversing Light /Number Plate Light
Waterproof	IP67
Cable Length	Light to Light-2.5Meters Light to Plug-7.5Meters



7PIN PLUG | L.E.D.S | DC12-24V DC INPUT | IP67 WATERPROOF | RoHS Certificatte AVAILABLE | E-MARK AVAILABLE

LED Trailer Light

ITEM NO.	Mounting Style	
TB-62-LH(RH)	By Screw	Single Light

Specification

Voltage	DC12/24V
Light Source	LED
Housing Material	PC
Function	Rear Position/Direction Indicator Break/Reflector/Number Plate Light
Waterproof	IP67





ITEM NO.	Mounting Style	
TB-62-M	By Magnetic Base	Right & Left Light

Specification

Voltage	DC12/24V
Light Source	LED
Housing Material	PC
Function	Rear Position/Direction Indicator Break/Reflector/Number Plate Light
Waterproof	IP67
Cable Length	Light to Light-2.5Meters Light to Plug-7.5Meters





LED Trailer Light

ITEM NO.	Mounting Style	
TB-62-S	By Screw	Right & Left Light

Specification

Voltage	DC12/24V
Light Source	LED
Housing Material	PC
Function	Rear Position/Direction Indicator Break/Reflector/Number Plate Light
Waterproof	IP67
Cable Length	Light to Light-2.5Meters Light to Plug-7.5Meters

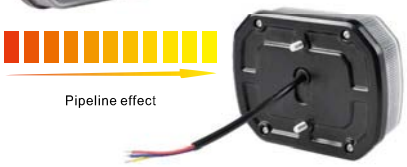





ITEM NO.	Mounting Style	
TB-62-MT	By Magnetic Base	Right & Left Light Rectangular Reflector

Specification

Voltage	DC12/24V
Light Source	LED
Housing Material	PC
Function	Rear Position/Direction Indicator Break/Reflector/Number Plate Light
Waterproof	IP67
Cable Length	Light to Light-2.5Meters Light to Plug-7.5Meters

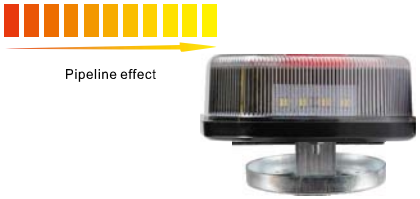

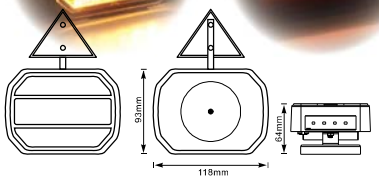



TRAILER LIGHT

LED Trailer Light

ITEM NO.	Mounting Style	
TB-10LED	By Screw	Single Light

Specification

Voltage	DC12/24V
Light Source	LED
Housing Material	PC
Function	Rear Position/Direction Indicator Break/Reflector/Number Plate Light
Waterproof	IP67



L.E.D.S | DC12-24V DC INPUT | IP67 WATERPROOF | RoHS Certificatte AVAILABLE | E-MARK AVAILABLE

ITEM NO.	Mounting Style	
TB-10LED-M	By Magnetic Base	Right & Left Light

Specification

Voltage	DC12/24V
Light Source	LED
Housing Material	PC
Function	Rear Position/Direction Indicator Break/Reflector/Number Plate Light
Waterproof	IP67
Cable Length	Light to Light-2.5Meters Light to Plug-7.5Meters



7PIN PLUG | L.E.D.S | DC12-24V DC INPUT | IP67 WATERPROOF | RoHS Certificatte AVAILABLE | E-MARK AVAILABLE

LED Trailer Light

ITEM NO.	Mounting Style	
LED-10LED-S	By Screw	Right & Left Light

Specification

Voltage	DC12/24V
Light Source	LED
Housing Material	PC
Function	Rear Position/Direction Indicator Break/Reflector/Number Plate Light
Waterproof	IP67
Cable Length	Light to Light-2.5Meters Light to Plug-7.5Meters



7PIN PLUG | L.E.D.S | DC12-24V DC INPUT | IP67 WATERPROOF | RoHS Certificatte AVAILABLE | E-MARK AVAILABLE

ITEM NO.	Mounting Style	
TB-10LED-MT	By Magnetic Base	Right & Left Light Rectangular Reflector

Specification

Voltage	DC12/24V
Light Source	LED
Housing Material	PC
Function	Rear Position/Direction Indicator Break/Reflector/Number Plate Light
Waterproof	IP67
Cable Length	Light to Light-2.5Meters Light to Plug-7.5Meters

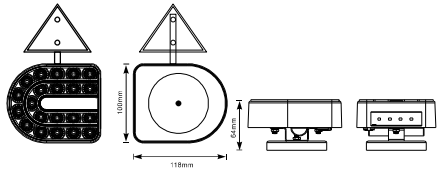

7PIN PLUG | L.E.D.S | DC12-24V DC INPUT | IP67 WATERPROOF | RoHS Certificatte AVAILABLE | E-MARK AVAILABLE

LED Trailer Light

ITEM NO.	Mounting Style	
LED-T001	By Screw	Single Light

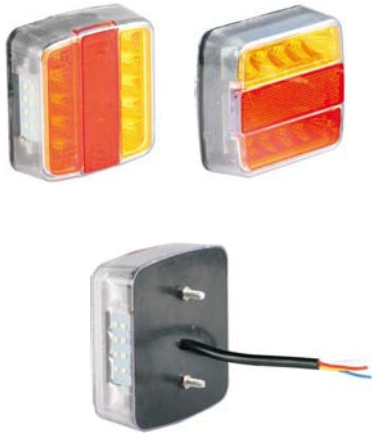

Specification

Voltage	DC12/24V
Light Source	LED
Housing Material	PC
Function	Rear Position/Direction Indicator Break/Reflector/Number Plate Light
Waterproof	IP67
Cable Length	Light to Light-2.5Meters Light to Plug-7.5Meters







ITEM NO.	Mounting Style	
TB-09B-LED	By Magnetic Base	Right & Left Light

Specification

Voltage	DC12/24V
Light Source	LED
Housing Material	PC
Function	Rear Position/Direction Indicator Break/Reflector/Number Plate Light
Waterproof	IP67
Cable Length	Light to Light-2.5Meters Light to Plug-7.5Meters







LED Trailer Light

ITEM NO.	Mounting Style	
TB-09C-LED	By Screw	Right & Left Light

Specification

Voltage	DC12/24V
Light Source	LED
Housing Material	PC
Function	Rear Position/Direction Indicator Break/Reflector/Number Plate Light
Waterproof	IP67
Cable Length	Light to Light-2.5Meters Light to Plug-7.5Meters





ITEM NO.	Mounting Style	
TB-09D-LED	By Magnetic Base	Right & Left Light

Specification

Voltage	DC12/24V
Light Source	LED
Housing Material	PC
Function	Rear Position/Direction Indicator Break/Reflector/Number Plate Light
Waterproof	IP67
Cable Length	Light to Light-2.5Meters Light to Plug-7.5Meters







TRAILER LIGHT

LED Trailer Light

ITEM NO.	Mounting Style	
LED-T002	By Screw	Single Light

Specification

Voltage	DC12/24V
Light Source	LED
Housing Material	PC
Function	Rear Position/Direction Indicator Break/Reflector/Number Plate Light
Waterproof	IP67
Cable Length	Light to Light-2.5Meters Light to Plug-7.5Meters



ITEM NO.	Mounting Style	
TB-31-LED	By Magnetic Base	Right & Left Light

Specification

Voltage	DC12/24V
Light Source	LED
Housing Material	PC
Function	Rear Position/Direction Indicator Break/Reflector/Number Plate Light
Waterproof	IP67
Cable Length	Light to Light-2.5Meters Light to Plug-7.5Meters





LED Trailer Light

ITEM NO.	Mounting Style	
TB-30-LED	By Magnetic Base	Right & Left Light

Specification

Voltage	DC12/24V
Light Source	LED
Housing Material	PC
Function	Rear Position/Direction Indicator Break/Reflector/Number Plate Light
Waterproof	IP67
Cable Length	Light to Light-2.5Meters Light to Plug-7.5Meters





ITEM NO.	Mounting Style	
TB-32-LED	By Magnetic Base	Right & Left Light Rectangular Reflector

Specification

Voltage	DC12/24V
Light Source	LED
Housing Material	PC
Function	Rear Position/Direction Indicator Break/Reflector/Number Plate Light
Waterproof	IP67
Cable Length	Light to Light-2.5Meters Light to Plug-7.5Meters

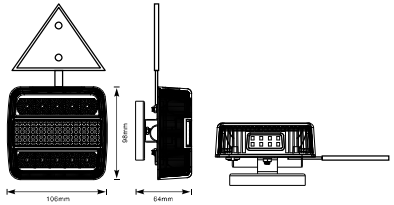



TRAILER LIGHT

LED Trailer Light

ITEM NO.	Mounting Style	
SC001	By Screw	

Specification

Voltage	DC12V
Light Source	Osram Lamp
Housing Material	PC
Function	Rear Position/Direction Indicator Break/Reflector/Number Plate Light
Waterproof	IP67



OSRAM LAMP | DC INPUT | WATERPROOF | AVAILABLE | AVAILABLE

ITEM NO.	Mounting Style	
TB-02A-1	By Magnetic Base	Right & Left Light

Specification

Voltage	DC12V
Light Source	Osram Lamp
Housing Material	PC
Function	Rear Position/Direction Indicator Break/Reflector/Number Plate Light
Waterproof	IP67
Cable Length	Light to Light-2.5Meters Light to Plug-7.5Meters



7PIN PLUG | OSRAM LAMP | DC INPUT | WATERPROOF | AVAILABLE | AVAILABLE

LED Trailer Light

ITEM NO.	Mounting Style	
TB-02A-2	By Screw	Right & Left Light

Specification

Voltage	DC12V
Light Source	Osram Lamp
Housing Material	PC
Function	Rear Position/Direction Indicator Break/Reflector/Number Plate Light
Waterproof	IP67
Cable Length	Light to Light-2.5Meters Light to Plug-7.5Meters



7PIN PLUG | OSRAM LAMP | DC INPUT | WATERPROOF | AVAILABLE | AVAILABLE

ITEM NO.	Mounting Style	
TB-02C	By Magnetic Base	Right & Left Light Rectangular Reflector

Specification

Voltage	DC12V
Light Source	Osram Lamp
Housing Material	PC
Function	Rear Position/Direction Indicator Break/Reflector/Number Plate Light
Waterproof	IP67
Cable Length	Light to Light-2.5Meters Light to Plug-7.5Meters

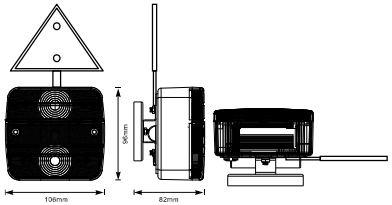

7PIN PLUG | OSRAM LAMP | DC INPUT | WATERPROOF | AVAILABLE | AVAILABLE

TRAILER LIGHT

Trailer Light Board

ITEM NO.	Board Extension Length Range	Cable Length
TB-56FT-1	1.4~2.1Meters	7.5Meter
TB-56FT-2	1.4~2.1Meters	10Meter
TB-56FT-3	1.4~2.1Meters	12Meter

Extendable Aluminium Tube

Pipeline effect 7PIN PLUG L.E.D.S DC12-24V DC INPUT IP67 WATERPROOF RoHS Certificatte AVAILABLE E-MARK AVAILABLE

Pipeline effect

ITEM NO.	Board Length	Cable Length
TB-56PVC-1	1.22Meters	7.5Meter
TB-56PVC-2	1.22Meters	10Meter
TB-56PVC-3	1.22Meters	12Meter



PVC Board

Pipeline effect 7PIN PLUG L.E.D.S DC12-24V DC INPUT IP67 WATERPROOF RoHS Certificatte AVAILABLE E-MARK AVAILABLE

Pipeline effect

ITEM NO.	Board Length	Cable Length
TB-56IP-1	1.22Meters	7.5Meter
TB-56IP-2	1.22Meters	10Meter
TB-56IP-3	1.22Meters	12Meter

Zinic Alloy Board

Pipeline effect 7PIN PLUG L.E.D.S DC12-24V DC INPUT IP67 WATERPROOF RoHS Certificatte AVAILABLE E-MARK AVAILABLE

Pipeline effect

Trailer Light Board

ITEM NO.	Board Extension Length Range	Cable Length
TB-62FT-1	1.4~2.1Meters	7.5Meter
TB-62FT-2	1.4~2.1Meters	10Meter
TB-62FT-3	1.4~2.1Meters	12Meter

Extendable Aluminium Tube

Pipeline effect 7PIN PLUG L.E.D.S DC12-24V DC INPUT IP67 WATERPROOF RoHS Certificatte AVAILABLE E-MARK AVAILABLE

Pipeline effect

ITEM NO.	Board Length	Cable Length
TB-62PVC-1	1.22Meters	7.5Meter
TB-62PVC-2	1.22Meters	10Meter
TB-62PVC-3	1.22Meters	12Meter



PVC Board

Pipeline effect 7PIN PLUG L.E.D.S DC12-24V DC INPUT IP67 WATERPROOF RoHS Certificatte AVAILABLE E-MARK AVAILABLE

Pipeline effect

ITEM NO.	Board Length	Cable Length
TB-62IP-1	1.22Meters	7.5Meter
TB-62IP-2	1.22Meters	10Meter
TB-62IP-3	1.22Meters	12Meter

Zinic Alloy Board

Pipeline effect 7PIN PLUG L.E.D.S DC12-24V DC INPUT IP67 WATERPROOF RoHS Certificatte AVAILABLE E-MARK AVAILABLE

Pipeline effect

Trailer Light Board

ITEM NO.	Board Extension Length Range	Cable Length
TB-08C-1	1.4~2.1Meters	7.5Meter
TB-08C-2	1.4~2.1Meters	10Meter
TB-08C-3	1.4~2.1Meters	12Meter

Extendable Aluminium Tube

7PIN PLUG | L.E.D.S | DC12-24V DC INPUT | IP67 WATERPROOF | RoHS Certificatte AVAILABLE | E-MARK AVAILABLE

ITEM NO.	Board Length	Cable Length
TB-13A-1	1.22Meters	7.5Meter
TB-13A-2	1.22Meters	10Meter
TB-13A-3	1.22Meters	12Meter



PVC Board

7PIN PLUG | L.E.D.S | DC12-24V DC INPUT | IP67 WATERPROOF | RoHS Certificatte AVAILABLE | E-MARK AVAILABLE

ITEM NO.	Board Length	Cable Length
TB-07B-1	1.22Meters	7.5Meter
TB-07B-2	1.22Meters	10Meter
TB-07B-3	1.22Meters	12Meter

Zinic Alloy Board

7PIN PLUG | L.E.D.S | DC12-24V DC INPUT | IP67 WATERPROOF | RoHS Certificatte AVAILABLE | E-MARK AVAILABLE

Trailer Light Board

ITEM NO.	Board Extension Length Range	Cable Length
TB-08A-1	1.4~2.1Meters	7.5Meter
TB-08A-2	1.4~2.1Meters	10Meter

Extendable Aluminium Tube

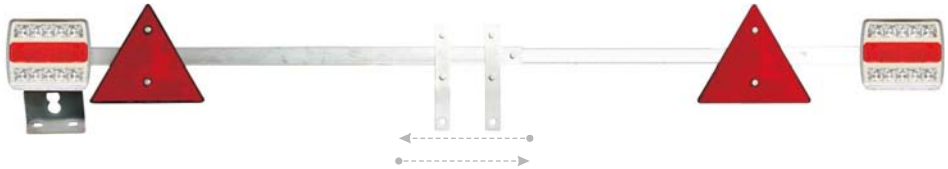

7PIN PLUG | L.E.D.S | DC12-24V DC INPUT | IP67 WATERPROOF | RoHS Certificatte AVAILABLE | E-MARK AVAILABLE

ITEM NO.	Board Length	Cable Length
TB-06A-1	1.22Meters	7.5Meter
TB-06A-2	1.22Meters	10Meter
TB-06A-3	1.22Meters	12Meter



PVC Board

7PIN PLUG | L.E.D.S | DC12-24V DC INPUT | IP67 WATERPROOF | RoHS Certificatte AVAILABLE | E-MARK AVAILABLE

ITEM NO.	Board Length	Cable Length
TB-07A-1	1.0Meters	7.5Meter
TB-07A-2	1.3Meters	7.5Meter
TB-07A-3	1.5Meters	7.5Meter

Zinic Alloy Board

7PIN PLUG | L.E.D.S | DC12-24V DC INPUT | IP67 WATERPROOF | RoHS Certificatte AVAILABLE | E-MARK AVAILABLE

Trailer Light Board

ITEM NO.	Board Extension Length Range	Cable Length
TB-09C-1	1.4~2.1Meters	7.5Meter
TB-09C-2	1.4~2.1Meters	10Meter
TB-09C-3	1.4~2.1Meters	12Meter

Extendable Aluminium Tube

7PIN PLUG | L.E.D.S | DC12-24V DC INPUT | IP67 WATERPROOF | RoHS Certificatte AVAILABLE | E-MARK AVAILABLE

ITEM NO.	Board Length	Cable Length
TB-01A-1	1.22Meters	7.5Meter
TB-01A-2	1.22Meters	10Meter
TB-01A-3	1.22Meters	12Meter



PVC Board



7PIN PLUG | L.E.D.S | DC12-24V DC INPUT | IP67 WATERPROOF | RoHS Certificatte AVAILABLE | E-MARK AVAILABLE

ITEM NO.	Board Length	Cable Length
TB-02-1	1.0Meters	7.5Meter
TB-02-2	1.0Meters	10Meter
TB-02-3	1.0Meters	12Meter

Zinic Alloy Board

7PIN PLUG | L.E.D.S | DC12-24V DC INPUT | IP67 WATERPROOF | RoHS Certificatte AVAILABLE | E-MARK AVAILABLE

Trailer Light Board

ITEM NO.	Board Extension Length Range	Cable Length
TB-05A-1	1.4~2.1Meters	7.5Meter
TB-05A-2	1.4~2.1Meters	10Meter
TB-05A-3	1.4~2.1Meters	12Meter

Extendable Aluminium Tube

7PIN PLUG | OSRAM LAMP | DC12V DC INPUT | IP67 WATERPROOF | RoHS Certificatte AVAILABLE | E-MARK AVAILABLE

ITEM NO.	Board Length	Cable Length
TB-04A-1	1.22Meters	7.5Meter
TB-04A-2	1.22Meters	10Meter
TB-04A-3	1.22Meters	12Meter



PVC Board

7PIN PLUG | OSRAM LAMP | DC12V DC INPUT | IP67 WATERPROOF | RoHS Certificatte AVAILABLE | E-MARK AVAILABLE

ITEM NO.	Board Length	Cable Length
TB-15A-1	1.22Meters	7.5Meter
TB-15A-2	1.22Meters	10Meter
TB-15A-3	1.22Meters	12Meter
TB-15B-1	1.0Meters	7.5Meter
TB-15B-2	1.0Meters	10Meter
TB-15B-3	1.0Meters	12Meter



Zinic Alloy Board

7PIN PLUG | OSRAM LAMP | DC12V DC INPUT | IP67 WATERPROOF | RoHS Certificatte AVAILABLE | E-MARK AVAILABLE

TRAILER LIGHT

Trailer Light Board

ITEM NO.	Board Extension Length Range	Cable Length
TB-80	1.3~1.9Meters	7.5Meter
TB-80-2	1.3~1.9Meters	10Meter

Extendable Aluminium Board

Pipeline effect 7PIN PLUG L.E.D.S DC12-24V DC INPUT IP67 WATERPROOF RoHS Certificatte AVAILABLE E-MARK AVAILABLE

Pipeline effect

ITEM NO.	Board Extension Length Range	Cable Length
TB-74	1.3~1.9Meters	7.5Meter
TB-74-2	1.3~1.9Meters	10Meter

Extendable Aluminium Board

7PIN PLUG L.E.D.S DC12-24V DC INPUT IP67 WATERPROOF RoHS Certificatte AVAILABLE E-MARK AVAILABLE

ITEM NO.	Board Extension Length Range	Cable Length
TB-81	1.3~1.9Meters	7.5Meter
TB-81-2	1.3~1.9Meters	10Meter

Extendable Aluminium Board

Pipeline effect 7PIN PLUG L.E.D.S DC12-24V DC INPUT IP67 WATERPROOF RoHS Certificatte AVAILABLE E-MARK AVAILABLE

Pipeline effect

Trailer Light Board

ITEM NO.	Board Extension Length Range	Cable Length
TB-78	1.3~1.9Meters	7.5Meter
TB-78-2	1.3~1.9Meters	10Meter

Extendable Aluminium Board

7PIN PLUG OSRAM LAMP DC12V DC INPUT IP67 WATERPROOF RoHS Certificatte AVAILABLE E-MARK AVAILABLE

ITEM NO.	Board Extension Length Range	Cable Length
TB-79	1.3~1.9Meters	7.5Meter
TB-79-2	1.3~1.9Meters	10Meter

7PIN PLUG L.E.D.S DC12-24V DC INPUT IP67 WATERPROOF RoHS Certificatte AVAILABLE E-MARK AVAILABLE

ITEM NO.	Board Extension Length Range	Cable Length
TB-75	1.3~1.9Meters	7.5Meter
TB-75-2	1.3~1.9Meters	10Meter

Extendable Aluminium Board

7PIN PLUG L.E.D.S DC12-24V DC INPUT IP67 WATERPROOF RoHS Certificatte AVAILABLE E-MARK AVAILABLE

140MM SINGLE&MULTI FUNCTION
LED TRUCK LIGHT

LED IP67

Voltage Range:12/24V

Ingress Protection: IP67
Approval: ECE & EMC

Direction Indicator | Emergency Light | Parking Light | Rear Fog Light | Reversing Light | Rear Fog & Reversing Light

JCTL-01-001R

JCTL-01-001W

JCTL-01-001AR

JCTL-01-001WR





Functions	Lens Color
Direction Indicator	🟠
Emergency Light	🔴🟠
Parking Light	🔴
Rear Fog Light	🔴
Reversing Light	○
Rear Fog & Reversing Light	○

80 SERIES
SMALL SQUARE REAR LAMPS 80MM MODULE

LED IP67

- The original square lamp design
- Tough acrylic lens
- Individually surface mounted
- Shock, water & dust proof
- Available with black or chrome brackets

INDICATOR

JCTL-03-002A BLACK
JCTL-03-002A CHROME

Current Draw (13.8V / 28V):
Indicator: 0.26A / 0.09A

STOP / TAIL

JCTL-03-002R BLACK
JCTL-03-002R CHROME

Current Draw (13.8V / 28V):
Stop: 0.27A / 0.12A, Tail: 0.07A / 0.01A

REVERSE

JCTL-03-002W BLACK
JCTL-03-002W CHROME

Current Draw (13.8V / 28V):
Reverse: 0.1A / 0.17A

Overall Size: 95 x 95 x 32mm
Cable Length: 400mm



FOG

JCTL-03-002F BLACK
JCTL-03-002F CHROME

Current Draw (13.8V / 28V):
Fog: 0.27A / 0.16A

REPLACEMENT BRACKETS

JCTL-03-002B1B BLACK
JCTL-03-002B1C CHROME

TRAILER LIGHT

100 SERIES
SMALL SQUARE REAR LAMPS 100MM MODULE

LED IP67

Voltage Range: 12/24V
Ingress Protection: IP67
Standard: E-Mark

- The original square lamp design
- Tough acrylic lens
- Individually surface mounted
- Shock, water & dust proof
- Available with black or chrome brackets



INDICATOR

JCTL-03-001A BLACK
JCTL-03-001A CHROME

Current Draw (13.8V / 28V):
Indicator: 0.38A / 0.23A

STOP / TAIL

JCTL-03-001R BLACK
JCTL-03-001R CHROME

Current Draw (13.8V / 28V):
Stop: 0.38A / 0.24A, Tail: 0.04A / 0.04A

REVERSE

JCTL-03-001W BLACK
JCTL-03-001W CHROME

Current Draw (13.8V / 28V):
Reverse: 0.31A / 0.17A

FOG

JCTL-03-001F BLACK
JCTL-03-001F CHROME

Current Draw (13.8V / 28V):
Fog: 0.42A / 0.21A

REPLACEMENT BRACKETS

JCTL-03-001B1B BLACK
JCTL-03-001B1C CHROME

Overall Size: 120 x 125 x 32mm
Cable Length: 400mm



SIDE MARKER LIGHT

LED IP67

Voltage Range: 12/30V
Ingress Protection: IP67
Standard: E-Mark



AMBER LENS COLOR
AMBER LED COLOR

JCTL-04-001A

RED LENS COLOR
RED LED COLOR

JCTL-04-001R

TRANSPARENT LENS COLOR
WHITE LED COLOR

JCTL-04-001W

TL414097
LICENSE PLATE LIGHT

Voltage Range: 10/30V
Ingress Protection: IP67
Standard: E-Mark



LED Truck Light

Square LED Tail Light

ITEM NO.	JCTL-02-005
VOLTAGE	DC12-30V
LIGHT SOURCE	LED
FUNCTION	Rear Position / Brake Light Direction Indicator/ License Plate Light
HOUSING MATERIAL	PC
WATERPROOF	IP 65



JCTL-02-005
With Number Plate Light

L.E.D.S | DC INPUT | WATERPROOF | AVAILABLE | AVAILABLE



ITEM NO.	JCTL-02-004
VOLTAGE	DC12-30V
LIGHT SOURCE	LED
FUNCTION	Rear Position / Brake Light Direction Indicator/ License Plate Light
HOUSING MATERIAL	PC
WATERPROOF	IP 65



L.E.D.S | DC INPUT | WATERPROOF | AVAILABLE | AVAILABLE



LED Truck Light

Square LED Tail Light

ITEM NO.	JCTL-02-001
VOLTAGE	DC12-30V
LIGHT SOURCE	LED
FUNCTION	Rear Position / Brake Light Direction Indicator
HOUSING MATERIAL	PC
WATERPROOF	IP 65



L.E.D.S | DC INPUT | WATERPROOF | AVAILABLE | AVAILABLE

ITEM NO.	JCTL-02-002
VOLTAGE	DC12-30V
LIGHT SOURCE	LED
FUNCTION	Rear Position / Brake Light Direction Indicator
HOUSING MATERIAL	PC
WATERPROOF	IP 65



L.E.D.S | DC INPUT | WATERPROOF | AVAILABLE | AVAILABLE

TRAILER LIGHT

L.E.D.S | DC12V DC INPUT | IP 65 WATERPROOF | RoHS Certificatte AVAILABLE

LED Truck Light

LED Double Face Light



Item NO.	**414052**
Operating Voltage	12V/24V
Color	Amber/Red
LED Quantity	24
Function	illuminating/Flashing



Item NO.	**414051**
Function	Amner/Red Marker
Operating Voltage(v)	12V/24V
LED Quantity	7
Function	illuminating/Flashing



Item NO.	**414048**
Operating Voltage	12V/24V
Color	Amber/Red
LED Quantity	18
Function	illuminating/Flashing

LED Truck Light

LED Double Face Light

L.E.D.S | DC12/24V DC INPUT | IP67 WATERPROOF | RoHS Certificatte AVAILABLE



Item NO.	**414058**
Operating Voltage	12V/24V
Color	Amber/Red
LED Quantity	7
Function	illuminating/Flashing



Item NO.	**414057**
Function	Amner/Red Marker
Operating Voltage(v)	12V/24V
LED Quantity	16
Function	illuminating/Flashing



Item NO.	**414053**
Operating Voltage	12V/24V
Color	Amber/Red
LED Quantity	24
Function	illuminating/Flashing

JCTL-04-004
3/4"MINI ROUND LED STROBE WARNING LIGHT

Voltage Range:12/24V
Ingress Protection: IP67
Standard: E-Mark

Light source: LED
Function: Flashing
Housing material: PC

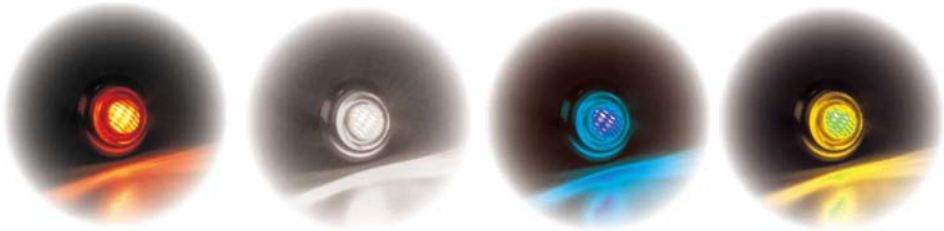

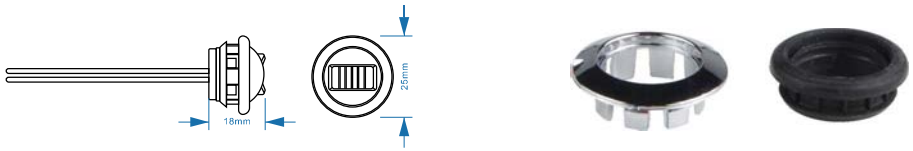

WP-19002
LED TRUCK LIGHT

Voltage Range:12/30V
Ingress Protection: IP67
Standard: E-Mark



LED Strip Brake Light

ITEM NO.	TL415001
VOLTAGE	DC12-24V
LIGHT SOURCE	LED
FUNCTION	Rear Position Light / Brake Light
HOUSING MATERIAL	PC
WATERPROOF	IP67



LED side marker light

ITEM NO.	JCTL-04-003
VOLTAGE	DC12V
LIGHT SOURCE	Tungsten lamp
FUNCTION	side marker light
HOUSING MATERIAL	PC
WATERPROOF	IP67

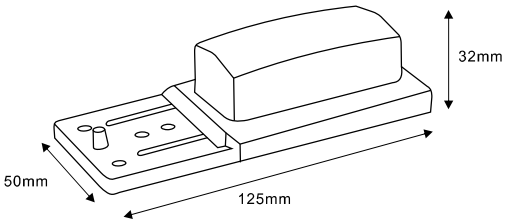

Reflective Tail Plate

Specification

Input Voltage	DC12V
Function	Rear Position/Direction Indicator/Brake
Waterproof	IP67
Plate Material	ABS

- R3 IB-E9-02.16205
- R4 L-E9-00.16205
- R6 2A-E9-01.16205
- R7 R1-S1-E9-02.16205
- R10 IB-E9-02.16205

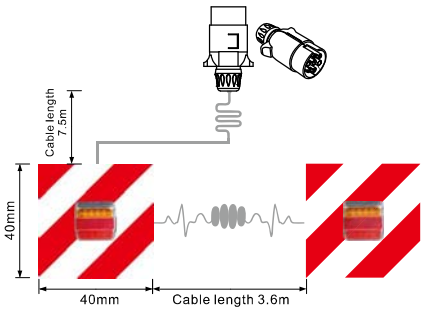

RTP-001A

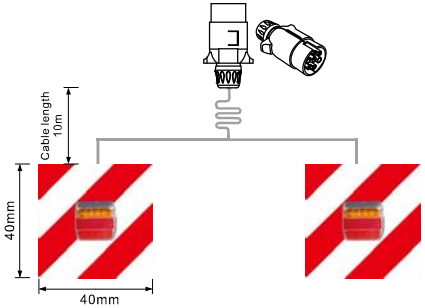

RTP-001B

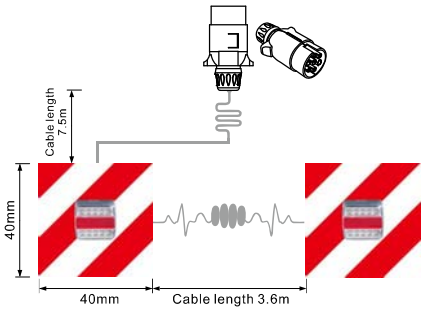

RTP-002A

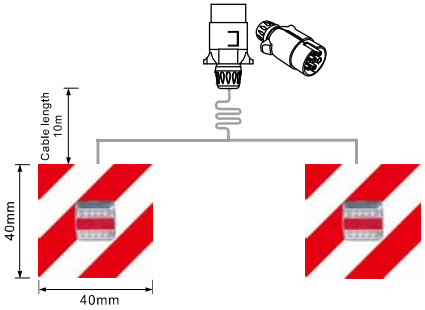

RTP-002B

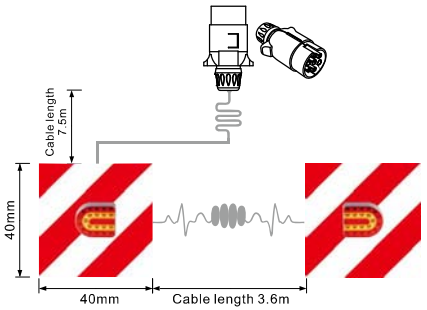

RTP-003A

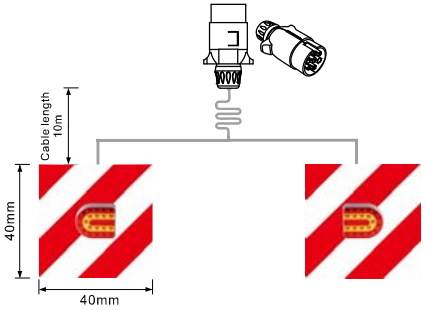

RTP-003B

Reflective Tail Plate

Specification

Input Voltage	DC12V
Function	Rear Position/Direction Indicator/Brake
Waterproof	IP67
Plate Material	ABS

R3 IB-E9-02.16205
R4 L-E9-00.16205
R6 2A-E9-01.16205
R7 R1-S1-E9-02.16205
R10 IB-E9-02.16205

RTP-005A

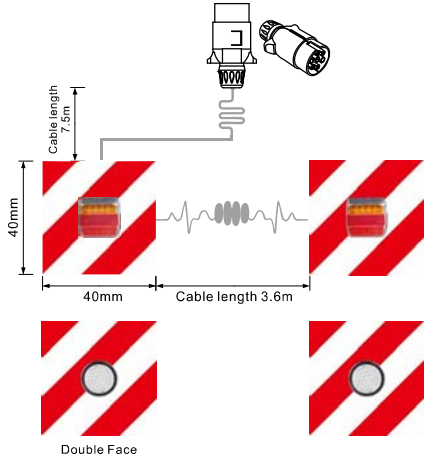

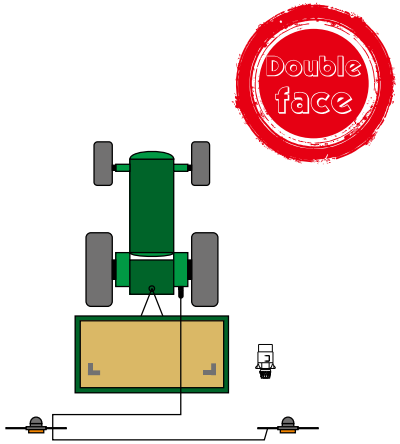

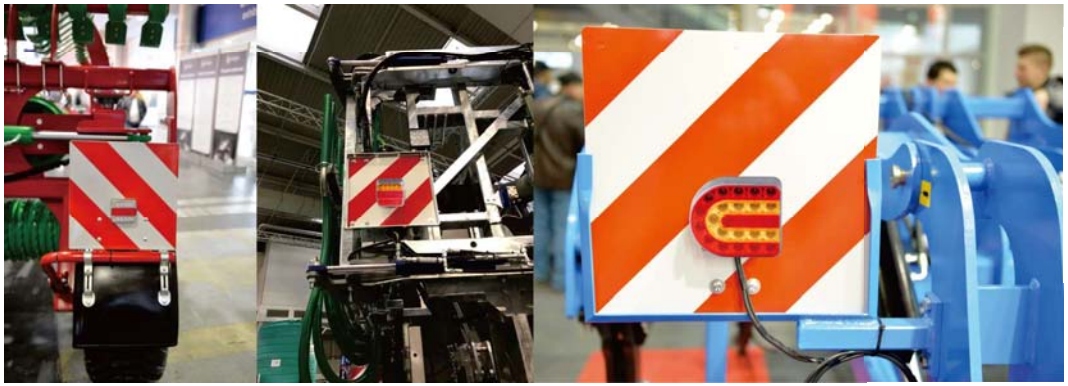

Interior Light Solution For Trucks

Interior Light Solution For Trucks

Specification
Voltage:DC24V
Light Source:High Intensity LED
Dimension:15*13*500mm
Power:20W
Lumen:1600LM
Housing Material:PC
Base Material:Aluminium
Customized Length is Available

Item No.:Lin-001

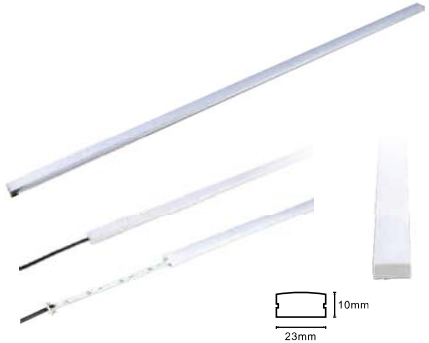



Specification
Voltage:DC24V
Light Source:High Intensity LED
Dimension:32*35*300mm
Power:36W
Lumen:2800LM
Housing Material:PC
Base Material:Aluminium
Customized Length is Available

Item No.:Lin-002

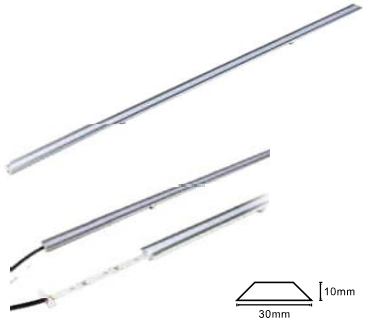

Specification
Voltage:DC24V
Light Source:High Intensity LED
Dimension:15*13*500mm
Power:20W
Lumen:1600LM
Housing Material:PC
Base Material:Aluminium
Customized Length is Available

Item No.:Lin-003

Interior Light Solution For Trucks

Specification
Voltage:DC24V
Light Source:High Intensity LED
Dimension:16*16*1000mm
Power:15W
Lumen:1000LM
Housing Material:PC
Base Material:Aluminium
Customized Length is Available

Item No.:Lin-004

Item No.:Lin-005

TRAILER LIGHT

Plug For Trailer Light

PLUG SERIES

PLUG-03

7 Pin Trailer Plug Plastic

PLUG-03B

7Pin Trailer Plug With Cover
Plastic

PLUG-05

7 Pin Trailer Plug
Aluminium Alloy

PLUG-06

13Pin Trailer Plug
Plastic

CONVERTOR SERIES

CON-01
7PIN TO 13PIN CONVERTOR

CON-02
7PIN TO 13PIN CONVERTOR

CON-03
7PIN TO 7PIN CONVERTOR

CON-04
13PIN TO DOUBLE 7PIN SOCKET CONVERTOR

CON-05
13PIN TO 7PIN SINGLE CONVERTOR

Plug For Trailer Light

DOUBLE PLUGS WITH CABLE SERIES

ITEM NO.	CABLE SPECIFICATION	PLUG TYPE
Plug-5D73-3.5	5core cable,3.5mters,	Plug-03
Plug-5D75-3.5	5core cable,3.5mters,	Plug-05
Plug-7D73-3.5	7core cable,3.5mters,	Plug-03
Plug-7D75-3.5	7core cable,3.5mters,	Plug-05
Plug-7D73-7	7core cable,7mters,	Plug-03
Plug-7D75-7	7core cable,7mters,	Plug-05

ITEM NO.	CABLE SPECIFICATION	PLUG TYPE
Plug-5D73-3.5F	5core cable,Strenghted Length :3.5mters,	Plug-03
Plug-5D75-3.5F	5core cable,Strenghted Length :3.5mters,	Plug-05
Plug-7D73-3.5F	7core cable,Strenghted Length :3.5mters,	Plug-03
Plug-7D75-3.5F	7core cable,Strenghted Length :3.5mters,	Plug-05
Plug-7D73-7F	7core cable,Strenghted Length :3.5mters,	Plug-03
Plug-7D75-7F	7core cable,Strenghted Length :3.5mters,	Plug-05

ITEM NO.	CABLE SPECIFICATION	PLUG TYPE
Plug-5D13-3.5	5core cable,Strenghted Length :3.5mters,	Plug-06
Plug-7D13-3.5	5core cable,Strenghted Length :3.5mters,	Plug-06

SOCKET For Trailer Light

SOCKET SERIES

SOCKET -01
7 Pin SOCKET ALUMINIUM ALLOY

SOCKET-04
7 Pin SOCKET PLASTIC

SOCKET-04B
7 Pin SOCKET PLASTIC

PIUG-05A
13Pin SOCKET PLASTIC

PIUG-05B
13Pin SOCKET PLASTIC

PLUG SERIES

TR-13
13Pin TRAILER PLUG TESTER

TR-07
7Pin TRAILER PLUG TESTER

Plug For Trailer Light

24V PLUG SERIES

Plug-24-001
7Pin Trailer Plug- Aluminium Alloy

Plug-24-002
7Pin Trailer Plug- Aluminium Alloy

Plug-24-003
7Pin Trailer Plug- Plastic

Plug-24-004
7Pin Trailer Plug- Plastic

Plug-24-005
7Pin Trailer Plug- Aluminium Alloy

Plug-24-006
7Pin Trailer Socket- Aluminium Alloy

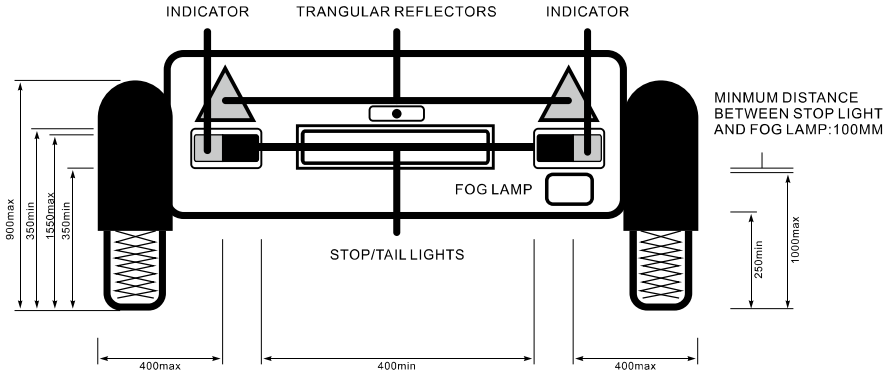

7PIN LIGHTING CONNECTIONS 12N BLACK CABLE FUNCTION

YELLOW	L/H DIRECTION INDICATOR
BLUE	REAR FOG LAMPS
WHITE	GROUND
GREEN	R/H DIRECTION INDICATOR
BROWN	R/H TAIL & LICENSE PLATE LAMP
RED	STOP LAMPS
BLACK	L/H TAIL & LICENSE PLATE LAMP

13PIN LIGHTING CONNECTIONS CABLE FUNCTION

YELLOW	LEFT INDICATOR
BLUE	FOG LIGHT
WHITE	GOUND
GREEN	RIGHT INDICATOR
BROWN	RIGHT TAIL / SIDE LIGHT
RED	BRAKE / STOP LIGHT
BLACK	LEFT TAIL / SIDE LIGHT
PINK	REVERSING LIGHT
ORANGE	12V PERMANENT POWER SUPPLY
GREY	12V IGNITION ON
WHITE/BLACK	GROUND FOR TERMINAL 10
WHITE/BLUE	NOT USED FREQUENTLY
WHITE/	GROUND FOR TE

LED TRUCK LIGHT
LED WORK LIGH

LED WORK LIGH
(P 166 ~ P 177)

LED TRUCK LIGHT
(P 151 ~ P 152)

LED WORK LIGH
(P 178 ~ P 183)

Item NO.: **210012**

5" **2900**LM **45W**



DESCRIPTION

Power	45W
Bulb Type	3W High Power LED,15PCS
Lumens	2900LM
Beam Type	High/Low Beam
Function	Headlight
Operating Voltage	DC10-30V
Color Temperature	6000K
Housing Material	Aluminium Die Cast
Water proof Rate	IP 65

AL A360 DIE-CAST HOUSING · EMI/RE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP65 WATERPROOF

Item NO.: **210009**

7" **2900**LM **45W**



DESCRIPTION

Power	45W
Bulb Type	3W High Power LED,15PCS
Lumens	2900LM
Beam Type	High/Low Beam
Function	Headlight
Operating Voltage	DC10-30V
Color Temperature	6000K
Housing Material	Aluminium Die Cast
Water proof Rate	IP 65

AL A360 DIE-CAST HOUSING · EMI/RE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP65 WATERPROOF

APPLICATION

Item NO.: 210013

5" **2900LM** **45W**

with convex lens



DESCRIPTION

Power	45W
Bulb Type	3W High Power LED,15PCS
Lumens	2900LM
Beam Type	High/Low Beam
Function	Headlight
Operating Voltage	DC9-30V
Color Temperature	6000K
Housing Material	Aluminium Die Cast
Water proof Rate	IP 67

AL A360 DIE-CAST HOUSING · EMI/RFI CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210009-4D

7" **2900LM** **45W**

with convex lens



DESCRIPTION

Power	45W
Bulb Type	3W High Power LED,15PCS
Lumens	2900LM
Beam Type	High/Low Beam
Function	Headlight
Operating Voltage	DC9-30V
Color Temperature	6000K
Housing Material	Aluminium Die Cast
Water proof Rate	IP 67

AL A360 DIE-CAST HOUSING · EMI/RFI CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

Item NO.: 210010

7" **2500LM** **39W**



DESCRIPTION

Power	39W
Bulb Type	3W High Power LED,13PCS
Lumens	2500LM
Beam Type	High/Low Beam
Function	Headlight
Operating Voltage	DC9-30V
Color Temperature	6000K
Housing Material	Aluminium Die Cast
Water proof Rate	IP 65

AL A360 DIE-CAST HOUSING · EMI/RFI CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210011

7" **3500LM** **55W**



DESCRIPTION

Power	55W
Bulb Type	5W LED,8PCS + 15W LED,1PCS
Lumens	3500LM
Beam Type	High/Low Beam +DRL
Function	Headlight
Operating Voltage	DC9-30V
Color Temperature	6000K
Housing Material	Aluminium Die Cast
Water proof Rate	IP 67

AL A360 DIE-CAST HOUSING · EMI/RFI CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

Item NO.: 210012A

5" 2900LM 45W

with "angel eyes"



DESCRIPTION

Power	45W
Bulb Type	3W High Power LED, 15PCS
Lumens	2900LM
Beam Type	High/Low Beam With "Angel Eyes"
Function	Headlight
Operating Voltage	DC9-30V
Color Temperature	6000K
Housing Material	Aluminium Die Cast
Water proof Rate	IP 67

AL A360 DIE-CAST HOUSING · EMI/RE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210009A

7" 2900LM 45W

with "angel eyes"



DESCRIPTION

Power	45W
Bulb Type	3W High Power LED, 15PCS
Lumens	2900LM
Beam Type	High/Low Beam With "Angel Eyes"
Function	Headlight
Operating Voltage	DC9-30V
Color Temperature	6000K
Housing Material	Aluminium Die Cast
Water proof Rate	IP 67

AL A360 DIE-CAST HOUSING · EMI/RE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210012D

5" 45W

double color

DESCRIPTION

Power	45W
Bulb Type	3W High Power LED, 15PCS
Color	Amber + White
Beam Type	Spot Light
Function	Headlight & Fog Light Combined
Operating Voltage	DC9-30V
Color Temperature	6000K
Housing Material	Aluminium Die Cast
Water proof Rate	IP 67

AL A360 DIE-CAST HOUSING · EMI/RE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210009D

7" 45W

double color



DESCRIPTION

Power	45W
Bulb Type	3W High Power LED, 15PCS
Color	Amber + White
Beam Type	Spotlight
Function	Headlight & Fog Light Combined
Operating Voltage	DC9-30V
Color Temperature	6000K
Housing Material	Aluminium Die Cast
Water proof Rate	IP 67

AL A360 DIE-CAST HOUSING · EMI/RE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

LED HEADLIGHT FOR TRUCKS

Item NO.: 210117A

5" 45W





DESCRIPTION

Power	45W
Bulb Type	High Power SMD LED,69PCS
Lumens	2600LM
Beam Type	High/Low Beam +DRL
Function	Headlight
Operating Voltage	DC9-30V
Color Temperature	6000K
Housing Material	Aluminium Die Cast
Water proof Rate	IP 67

AL A360 DIE-CAST HOUSING · EMI/RE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210118

5" 45W



DESCRIPTION

Power	45W
Bulb Type	3W High Power LED
Lumens	3100LM
Beam Type	High/Low Beam + DRL+Red Eye
Function	Headlight
Operating Voltage	DC9-30V
Color Temperature	6500K
Housing Material	Aluminium Die Cast
Water proof Rate	IP 67

AL A360 DIE-CAST HOUSING · EMI/RE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

Item NO.: 210125

7" 3100LM 45W



DESCRIPTION

Power	45W
Bulb Type	3W High Power LED
Lumens	3100LM
Beam Type	High/Low Beam +DRL +Turn Light
Function	Headlight
Operating Voltage	DC9-30V
Color Temperature	6000K
Housing Material	Aluminium Die Cast
Water proof Rate	IP 67

AL A360 DIE-CAST HOUSING · EMI/RE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210119

7" 3300LM 50W



DESCRIPTION

Power	50W
Bulb Type	5WLED,8PCS+10W LED,1PCS
Lumens	3300LM
Beam Type	High/Low Beam With DRL
Function	Headlight
Operating Voltage	DC9-30V
Color Temperature	6500K
Housing Material	Aluminium Die Cast
Water proof Rate	IP 67

AL A360 DIE-CAST HOUSING · EMI/RE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

LED HEADLIGHT FOR TRUCKS

Item NO.: 210218

7" 3100LM 45W



DESCRIPTION

Power	45W
Bulb Type	5W High Power LED,9PCS
Lumens	3100LM
Beam Type	Low/High Beam
Operating Voltage	DC9-30V
Color Temperature	6500K
Housing Material	Aluminium Die Cast
Water proof Rate	IP 67

AL A360 DIE-CAST HOUSING · EMI/RE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210220

5" 2100LM 30W





DESCRIPTION

Power	30W
Bulb Type	5W High Power LED,6PCS
Lumens	2100LM
Beam Type	Low/High Beam
Operating Voltage	DC9-30V
Color Temperature	6500K
Housing Material	Aluminium Die Cast
Water proof Rate	IP 67

AL A360 DIE-CAST HOUSING · EMI/RE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

Item NO.: 210219A

5" 3100LM 45W



DESCRIPTION

Power	45W
Bulb Type	High Power LED
Lumens	3100LM
Beam Type	Low/High Beam +DRL
Operating Voltage	DC9-30V
Color Temperature	6500K
Housing Material	Aluminium Die Cast
Water proof Rate	IP 67

AL A360 DIE-CAST HOUSING · EMI/RE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210119B

7" 3100LM 45W



DESCRIPTION

Power	45W
Bulb Type	3W High Power LED,15PCS
Lumens	3100LM
Beam Type	Low /High Beam +DRL
Operating Voltage	DC9-30V
Color Temperature	6500K
Housing Material	Aluminium Die Cast
Water proof Rate	IP 67

AL A360 DIE-CAST HOUSING · EMI/RE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

Item NO.: 210121

5" 3100LM 45W



DESCRIPTION

Power	45W
Bulb Type	High Power LED,9PCS
Lumens	3100LM
Beam Type	Low/High Beam +DRL
Operating Voltage	DC9-30V
Color Temperature	6500K
Housing Material	Aluminium Die Cast
Water proof Rate	IP 67

AL A360 DIE-CAST HOUSING · EMI/RE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210186

5" 3100LM 45W



DESCRIPTION

Power	45W
Bulb Type	High Power LED
Lumens	3100LM
Beam Type	Low/High Beam
Operating Voltage	DC9-30V
Color Temperature	6500K
Housing Material	Aluminium Die Cast
Water proof Rate	IP 67

AL A360 DIE-CAST HOUSING · EMI/RE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

Item NO.: 210117B

5" 3100LM 45W



DESCRIPTION

Power	45W
Bulb Type	High Power SMD LED,9PCS
Lumens	3100LM
Beam Type	High/Low Beam +DRL
Function	Headlight
Operating Voltage	DC9-30V
Color Temperature	6500K
Housing Material	Aluminium Die Cast
Water proof Rate	IP 67

AL A360 DIE-CAST HOUSING · EMI/RE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210300

5" 3780LM 54W

DESCRIPTION

Power	54W
Bulb Type	High Power SMD LED,18PCS
Lumens	3780LM
Beam Type	High/Low Beam +DRL
Function	Headlight
Operating Voltage	DC9-30V
Color Temperature	6500K
Housing Material	Aluminium Die Cast
Water proof Rate	IP 67

AL A360 DIE-CAST HOUSING · EMI/RE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

Item NO.: 210306

7" 4620LM 66W

DESCRIPTION

Power	66W
Bulb Type	High Power SMD LED,22PCS
Lumens	4620LM
Beam Type	High/Low Beam +DRL
Function	Headlight
Operating Voltage	DC9-30V
Color Temperature	6500K
Housing Material	Aluminium Die Cast
Water proof Rate	IP 67

AL A360 DIE-CAST HOUSING · EMI-RFI CISPR 25 RATED · RoHS Certificatte AVAILABLE · E E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

Item NO.: 210360

7" 4620LM 66W

DESCRIPTION

Power	66W
Bulb Type	High Power SMD LED,22PCS
Lumens	4620LM
Beam Type	High/Low Beam +DRL
Function	Headlight
Operating Voltage	DC9-30V
Color Temperature	6500K
Housing Material	Aluminium Die Cast
Water proof Rate	IP 67

AL A360 DIE-CAST HOUSING · EMI-RFI CISPR 25 RATED · RoHS Certificatte AVAILABLE · E E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

12-24V IP65 NEW

4" Round Tail Light

Whit Refletor

Voltage	DC12-24V
Light Source	12 LED
Housing Material	ABS
Lens Material	PC
Function	Stop / Tail Light / Strobe Function
IP Rate	IP65

Color

- Red
- Amber
- White

TL412036-BD

Thin Permanent Base

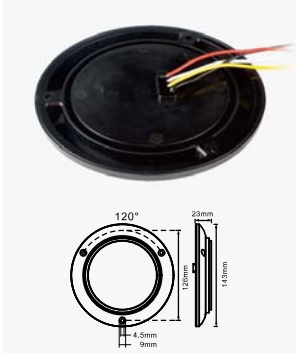

TL412036-YB

Permanent Base

TL412036-RD

Rubber Grommet Base

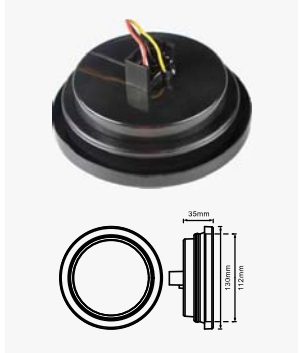

12-24V IP65 NEW

4" Round Tail Light

Whit Convex Lens

Voltage	12-24V
Light Source	12 LED
Housing Material	ABS
Lens Material	PC
Function	Stop / Tail Light / Strobe Function
IP Rate	IP65

Color

- Red
- Amber
- White

TL412037-BD

Thin Permanent Base

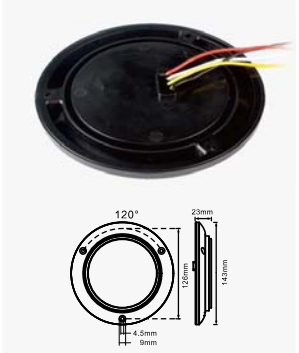

TL412037-YB

Permanent Base

TL412037-RD

Rubber Grommet Base

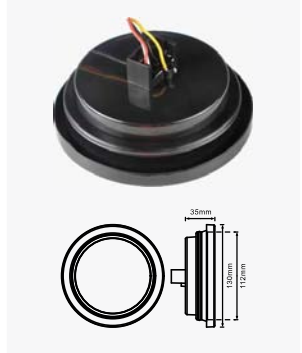

12-24V IP65 NEW

4" Round Tail Light

Whit Refletor

Voltage	12-24V
Light Source	19 LED
Housing Material	ABS
Lens Material	PC
Function	Stop / Tail Light / Strobe Function
IP Rate	IP65

Color

- Red
- Amber
- White

TL412023-BD	TL412023-YB	TL412023-RD
Thin Permanent Base	Permanent Base	Rubber Grommet Base

12-24V IP65 NEW

4" Round Tail Light

Whit Refletor

Voltage	12-24V
Light Source	24 LED
Housing Material	ABS
Lens Material	PC
Function	Stop / Tail Light / Strobe Function
IP Rate	IP65

Color

- Red
- Amber
- White

TL412039-BD	TL412039-YB	TL412039-RD
Thin Permanent Base	Permanent Base	Rubber Grommet Base

Round Tail Light

12-24V IP65 NEW

4" Round Tail Light

Whit Convex Lens

Voltage	12-24V
Light Source	24 LED
Housing Material	ABS
Lens Material	PC
Function	Stop / Tail Light / Strobe Function
IP Rate	IP65

Color

- Red
- Amber
- White

TL412040-BD	TL412040-YB	TL412040-RD
Thin Permanent Base	Permanent Base	Rubber Grommet Base

12-24V IP65 NEW

4" Round Tail Light

Whit Refletor

Voltage	12-24V
Light Source	33 LED
Housing Material	ABS
Lens Material	PC
Function	Stop / Tail Light / Strobe Function
IP Rate	IP65

Color

- Red
- Amber
- White

TL412043-BD	TL412043-YB	TL412043-RD
Thin Permanent Base	Permanent Base	Rubber Grommet Base

Round Tail Light

12-24V IP65 NEW

4" Round Tail Light

Whit Convex Lens

Voltage	12-24V
Light Source	33 LED
Housing Material	ABS
Lens Material	PC
Function	Stop / Tail Light / Strobe Function
IP Rate	IP65

Color

- Red
- Amber
- White

TL412044-BD	TL412044-YB	TL412044-RD
Thin Permanent Base	Permanent Base	Rubber Grommet Base

12V IP65 NEW

4" Round Tail Light

Whit Convex Lens

Voltage	12V
Light Source	24 LED
Housing Material	ABS
Lens Material	PC
Function	Stop/ Turn / Tail Light / Strobe Function
IP Rate	IP65

Color

- Red
- Amber
- White

TL412015-BD	TL412015-YB	TL412015-RD
Thin Permanent Base	Permanent Base	Rubber Grommet Base

Round Tail Light

12V IP65 NEW

4" Round Tail Light

Whit Convex Lens

Voltage	12V
Light Source	5 LED
Housing Material	ABS
Lens Material	PC
Function	Stop / Tail Light / Strobe Function
IP Rate	IP65

Color

- Red
- Amber
- White

TL412024-BD	TL412024-YB	TL412024-RD
Thin Permanent Base	Permanent Base	Rubber Grommet Base

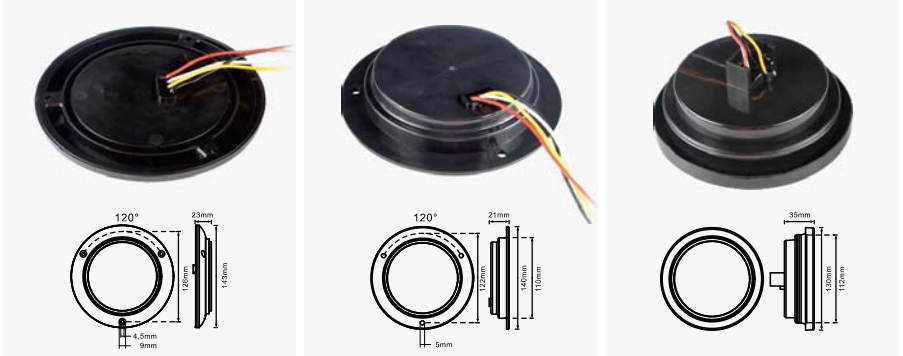

12V IP65 NEW

4" Round Tail Light

Whit Convex Lens

Voltage	12V
Light Source	8 +24 LED
Housing Material	ABS
Lens Material	PC
Function	Stop / Tail Light / Strobe Function
IP Rate	IP65

Color

- Red
- Amber
- White

TL412025-BD	TL412025-YB	TL412025-RD
Thin Permanent Base	Permanent Base	Rubber Grommet Base

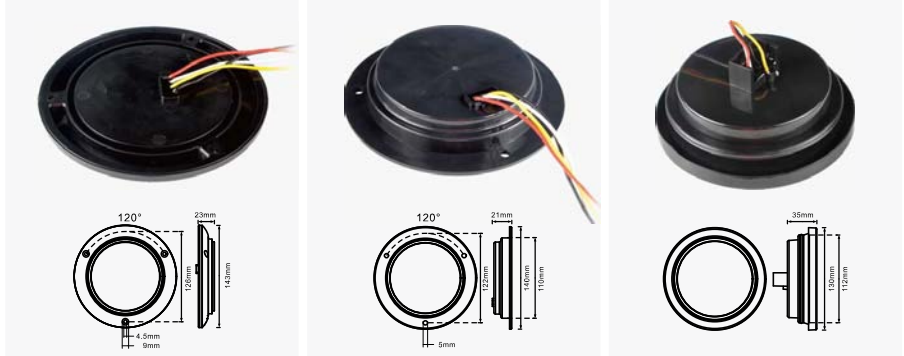

Round Tail Light

12V IP65 NEW

4" Round Tail Light

Whit Convex Lens

Voltage	12V
Light Source	10 LED
Housing Material	ABS
Lens Material	PC
Function	Stop / Tail Light / Strobe Function
IP Rate	IP65

Color

- Red
- Amber
- White

TL412027-BD | **TL412027-YB** | **TL412027-RD**

Thin Permanent Base	Permanent Base	Rubber Grommet Base
		

12V IP65 NEW

4" Round Tail Light

Whit Convex Lens

Voltage	12V
Light Source	6+24 LED
Housing Material	ABS
Lens Material	PC
Function	Stop / Tail Light / Strobe Function
IP Rate	IP65

Color

- Red
- Amber
- White

TL412042-BD | **TL412042-YB** | **TL412042-RD**

Thin Permanent Base	Permanent Base	Rubber Grommet Base
		

Round Tail Light

12-24V IP65 NEW

4" Round Tail Light

Whit Refletor

Voltage	12-24V
Light Source	24 LED
Housing Material	ABS
Lens Material	PC
Function	Stop / Tail Light / Strobe Function
IP Rate	IP65

Color

- Red
- Amber
- White

TL412047-BD	TL412047-YB	TL412047-RD
Thin Permanent Base	Permanent Base	Rubber Grommet Base

12-24V IP65 NEW

4" Round Tail Light

Whit Refletor

Voltage	12-24V
Light Source	24 LED
Housing Material	ABS
Lens Material	PC
Function	Stop / Tail Light / Reversing Light
IP Rate	IP65

Color

- Red
- Amber
- White

TL412046-BD	TL412046-YB	TL412046-RD
Thin Permanent Base	Permanent Base	Rubber Grommet Base

12-24V IP65 NEW

6" Oval Tail Light

Whit Convex Lens

Voltage	12-24V
Light Source	10 LED
Housing Material	ABS
Lens Material	PC
Function	Stop / Tail Light / Strobe Function
IP Rate	IP65

Color

- Red
- Amber
- White

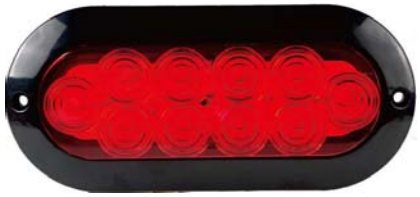

TL413013-BD
Thin Permanent Base



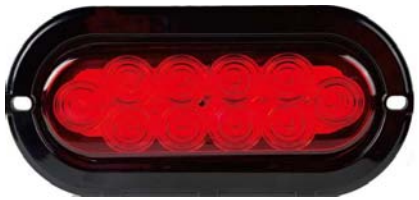

TL413013-YD
Permanent Base



TL413013-RD
Rubber Grommet Base



12-24V IP65 NEW

6" Oval Tail Light

Whit Refletor

Voltage	12-24V
Light Source	14 LED
Housing Material	ABS
Lens Material	PC
Function	Stop / Tail Light / Strobe Function
IP Rate	IP65

Color

- Red
- Amber
- White



TL413017-BD
Thin Permanent Base



TL413017-YD
Permanent Base



TL413017-RD
Rubber Grommet Base



Oval Tail Light

12-24V IP65 NEW

6" Oval Tail Light

Whit Convex Lens

Voltage	12-24V
Light Source	14 LED
Housing Material	ABS
Lens Material	PC
Function	Stop / Tail Light / Strobe Function
IP Rate	IP65

Color

- Red
- Amber
- White

TL413020-BD
Thin Permanent Base



TL413020-YD
Permanent Base



TL413020-RD
Rubber Grommet Base



12-24V IP65 NEW

6" Oval Tail Light

Whit Refletor

Voltage	12-24V
Light Source	25 LED
Housing Material	ABS
Lens Material	PC
Function	Stop / Tail Light / Strobe Function
IP Rate	IP65

Color

- Red
- Amber
- White

TL413018-BD
Thin Permanent Base



TL413018-YD
Permanent Base



TL413018-RD
Rubber Grommet Base



Oval Tail Light

12-24V IP65 NEW

6" Oval Tail Light

Whit Convex Lens

Voltage	12-24V
Light Source	25 LED
Housing Material	ABS
Lens Material	PC
Function	Stop / Tail Light / Strobe Function
IP Rate	IP65

Color

- Red
- Amber
- White





TL413021-BD
Thin Permanent Base



TL413021-YD
Permanent Base



TL413021-RD
Rubber Grommet Base

12-24V IP65 NEW

6" Oval Tail Light

Whit Refletor

Voltage	12-24V
Light Source	34 LED
Housing Material	ABS
Lens Material	PC
Function	Stop / Tail Light / Strobe Function
IP Rate	IP65

Color

- Red
- Amber
- White





TL413019-BD
Thin Permanent Base



TL413019-YD
Permanent Base



TL413019-RD
Rubber Grommet Base

Oval Tail Light

12-24V IP65 NEW

6" Oval Tail Light

Whit Convex Lens

Voltage	12-24V
Light Source	34 LED
Housing Material	ABS
Lens Material	PC
Function	Stop / Tail Light / Strobe Function
IP Rate	IP65

Color

- Red
- Amber
- White



TL413022-BD
Thin Permanent Base



TL413022-YD
Permanent Base



TL413022-RD
Rubber Grommet Base

12V IP65 NEW

6" Oval Tail Light

Whit Convex Lens

Voltage	12V
Light Source	30 LED
Housing Material	ABS
Lens Material	PC
Function	Stop / Tail Light / Strobe Function
IP Rate	IP65

Color

- Red
- Amber
- White

TL413010-RD
Thin Permanent Base • Permanent Base • Rubber Grommet Base

6" Oval Tail Light

Whit Convex Lens

Voltage	12V
Light Source	30 LED
Housing Material	ABS
Lens Material	PC
Function	Stop / Tail Light / Strobe Function
IP Rate	IP65

Color

- Red
- Amber
- White



TL413011-RD
Thin Permanent Base • Permanent Base • Rubber Grommet Base

Oval Tail Light

12-24V IP65 NEW

6" Oval Tail Light

Voltage	12-24V
Light Source	27LED
Housing Material	ABS
Lens Material	PC
Function	Stop / Tail Light / Strobe Function
IP Rate	IP65

Color

- Red
- Amber
- White

TL413014-BD
Thin Permanent Base

TL413014-YD
Permanent Base

TL413014-RD
Rubber Grommet Base

6" LED Truck Light

Voltage	12-24V
Light Source	36LED
Housing Material	ABS
Lens Material	PC
Function	Stop ,Turn & tail Light
IP Rate	IP58

Color

- Red
- Amber
- White

TL413029-BD
Thin Permanent Base



TL413029-YB
Permanent Base

TL413029-RD
Rubber Grommet Base

12-24V IP65 NEW

6" Oval Tail Light

Voltage	12-24V
Light Source	10 LED
Housing Material	ABS
Lens Material	PC
Function	Stop / Tail Light / Strobe Function
IP Rate	IP65

Color

- Red
- Amber
- White

TL413028-BD
Thin Permanent Base



TL413028-YD
Permanent Base



TL413028-RD
Rubber Grommet Base



LED Double Face Light

Item No.	TL417053
Voltage	12-24V
Light Source	48LED
Housing Material	ABS
Lens Material	PC
Function	3 Function
IP Rate	IP65

Color

- Red
- Amber
- White

Size



12-24V IP65 NEW

LED Double Face Light

Item No.	TL417057
Voltage	12-24V
Light Source	32LED
Housing Material	ABS
Lens Material	PC
Function	3 Function
IP Rate	IP65

Color

- Red
- Amber
- White

Size



LED Double Face Light

Item No.	TL417046
Voltage	12V
Light Source	32LED
Housing Material	ABS
Lens Material	PC
Function	2Function
IP Rate	IP65

Color

- Red
- Amber
- White

Size



IP65 NEW

LED Double Face Light

Item No.	TL414047
Voltage	12-24V
Light Source	50 LED
Housing Material	ABS
Lens Material	PC
Function	3 Function
IP Rate	IP65

Color

- Red
- Amber
- White

Size



LED Double Face Light

LED Double Face Light

Item No.	TL417004
Voltage	12V
Light Source	48 LED
Housing Material	ABS
Lens Material	PC
Function	3 Function
IP Rate	IP65

Color

- Red
- Amber
- White

Size



IP65 NEW

LED Double Face Light

Item No.	TL417001
Voltage	12-24V
Light Source	48 LED
Housing Material	ABS
Lens Material	PC
Function	3 Function
IP Rate	IP65

Color

- Red
- Amber
- White

Size



LED Double Face Light

Item No.	TL414058
Voltage	12-24V
Light Source	14LED
Housing Material	ABS
Lens Material	PC
Function	2 Function
IP Rate	IP65

Color

- Red
- Amber
- White

Size



IP65 NEW

Item No.	TL414054
Voltage	12V
Light Source	36LED
Housing Material	ABS
Lens Material	PC
Function	2Function
IP Rate	IP65

Color

- Red
- Amber
- White

Size



LED Double Face Light

12-24V IP65 NEW

LED Double Face Light

Item No.	TL417005
Voltage	12-24V
Light Source	36 LED
Housing Material	ABS
Lens Material	PC
Function	2Function
IP Rate	IP65

Color

- Red
- Amber
- White

Size



12V IP65 NEW

LED Double Face Light

Item No.	TL417001FR
Voltage	12V
Light Source	48 LED
Housing Material	ABS
Lens Material	PC
Function	3 Function
IP Rate	IP65

Color

- Red
- Amber
- White

Size



LED Double Face Light

12V IP65 NEW

LED Double Face Light

Item No.	TL417051
Voltage	12V
Light Source	14LED
Housing Material	ABS
Lens Material	PC
Function	2Function
IP Rate	IP65

Color

- Red
- Amber
- White

Size



12-24V IP65 NEW

LED Double Face Light

Item No.	TL417052
Voltage	12-24V
Light Source	48LED
Housing Material	ABS
Lens Material	PC
Function	2Function
IP Rate	IP65

Color

- Red
- Amber
- White

Size



LED Double Face Light

LED Side Marker Light

Item No.	TL413012
Voltage	12V
Light Source	4 LED
Housing Material	ABS
Lens Material	PC
Function	Side Marker Light
IP Rate	IP65

Color: Red, Amber, White

12V

IP65 NEW

LED Side Marker Light

Item No.	TL414082
Voltage	10V-24V
Light Source	24 LED
Housing Material	ABS
Lens Material	PC
Function	Side Marker Light
IP Rate	IP65

Color: Red, Amber, White

10-24V

LED Side Marker Light

Item No.	TL414036
Voltage	12V
Light Source	4 LED
Housing Material	ABS
Lens Material	PC
Function	Side Marker Light
IP Rate	IP65

Color: Red, Amber, White

12V

LED Side Marker Light

Item No.	TL414091
Voltage	10V-24V
Light Source	24 LED
Housing Material	ABS
Lens Material	PC
Function	Side Marker Light
IP Rate	IP65

Color: Red, Amber, White

10-24V

IP65 NEW

LED Side Marker Light

Item No.	TL414043
Voltage	12V
Light Source	3 LED
Housing Material	ABS
Lens Material	PC
Function	Side Marker Light, Full Bright
IP Rate	IP65

Color: Red, Amber, White

12V

LED Side Marker Light

Item No.	TL414050
Voltage	12V
Light Source	12 LED
Housing Material	ABS
Lens Material	PC
Function	Side Marker Light, Full Bright
IP Rate	IP65

Color: Red, Amber, White

12V

LED Side Marker Light

Item No.	TL414095	TL414011N
Voltage	12V	10V-24V
Light Source	3W*2	12 LED
Housing Material	ABS	ABS
Lens Material	PC	PC
Function	Side Marker Light	Side Marker Light
IP Rate	IP65	IP65

TL414095

12V

TL414011N

10-24V

Color: Red, Amber, White

LED Side Marker Light

Item No.	TL414008
Voltage	12V
Light Source	4 LED
Housing Material	ABS
Lens Material	PC
Function	Side Marker Light,Full Bright
IP Rate	IP65

12V

Color: Red, Amber, White

LED Side Marker Light

LED Side Marker Light

Item No.	TL414080
Voltage	10V-24V
Light Source	12 LED
Housing Material	ABS
Lens Material	PC
Function	3Functions
IP Rate	IP65

Color
- Red
- Amber
- White

10-24V

LED Side Marker Light

IP65 NEW

Item No.	TL414081
Voltage	12V-24V
Light Source	5 LEDS
Housing Material	ABS
Lens Material	PC
Function	Side Marker Light with Strobe Function
IP Rate	IP65

Color
- Red
- Amber
- White

12-24V

LED Side Marker Light

Item No.	TL414083	TL414083-2
Voltage	12V-24V	12V-24V
Light Source	9 LED	12 LED
Housing Material	ABS	ABS
Lens Material	PC	PC
Function	Full Bright + Flashing	Full Bright + Flashing
IP Rate	IP65	IP65

TL414083

TL414083-2

12-24V

Color
- Red
- Amber
- White

LED Side Marker Light

Item No.	TL414084
Voltage	12V-24V
Light Source	——
Housing Material	ABS
Lens Material	PC
Function	Side Marker Light
IP Rate	I65

Color
- Red
- Amber
- White

12-24V

LED Side Marker Light

Item No.	TL414085
Voltage	12V-24V
Light Source	——
Housing Material	ABS
Lens Material	PC
Function	Side Marker Light
IP Rate	IP65

Color
- Red
- Amber
- White

12-24V

LED Side Marker Light

IP65 NEW

Item No.	TL414086-RD
Voltage	12V
Light Source	——
Housing Material	ABS
Lens Material	PC
Function	Full Bright
IP Rate	IP65

Color
- Red
- Amber
- White

12V

3/4"Mini Round LED Strobe Warning Light

Item No.	TH-25
Voltage	12V
Light Source	——
Housing Material	ABS
Lens Material	PC
Function	Flashing
IP Rate	IP65

Color
- Red
- Amber
- White
- Blue

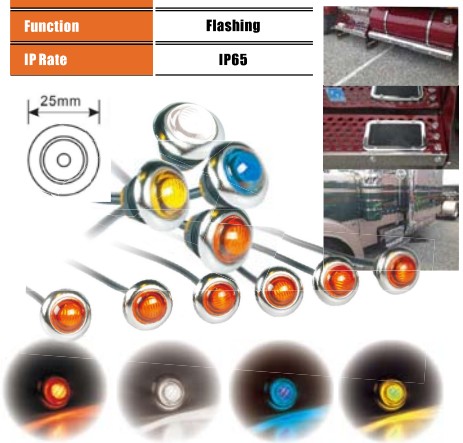

LED Side Marker Light

Item No.	TL414080-2
Voltage	10V-24V
Light Source	12 LED
Housing Material	ABS
Lens Material	PC
Function	Full Bright + Flashing
IP Rate	IP65

Color
- Red
- Amber
- White

12-24V IP65 NEW

LED Side Marker Light

Item No.	TL412033-N
Voltage	12V-24V
Light Source	5 LEDS
Housing Material	ABS
Lens Material	PC
Function	Half Bright/Full Bright
IP Rate	IP65

Color

- Red
- Amber
- White

LED Side Marker Light

Item No.	TL414003-FG
Voltage	12V-24V
Light Source	5 LEDS
Housing Material	ABS
Lens Material	PC
Function	Half Bright/Full Bright
IP Rate	IP65

Color

- Red
- Amber
- White

LED Side Marker Light

Item No.	TL414003-DG
Voltage	12V-24V
Light Source	5 LEDS
Housing Material	ABS
Lens Material	PC
Function	Half Bright/Full Bright
IP Rate	IP65

Color

- Red
- Amber
- White

12-24V IP65 NEW

LED Strip Brake Light

Item No.	TL414054
Voltage	12V-24V
Light Source	LED
Housing Material	ABS
Lens Material	PC
Function	Half Bright/Full Bright
IP Rate	IP65

Color

- Red
- Amber
- White



LED Side Marker Light

Item No.	TL411025
Voltage	12V-24V
Light Source	26LEDS
Housing Material	ABS
Lens Material	PC
Function	Stop /tail & Reversing Light
IP Rate	IP65

Color

- Red
- Amber
- White

CLASSIC LED WORK LIGHT FOR AGRICULTURAL VEHICLES
LED WARNING LIGHT FOR FOLKLIFT
LED WORK LIGH

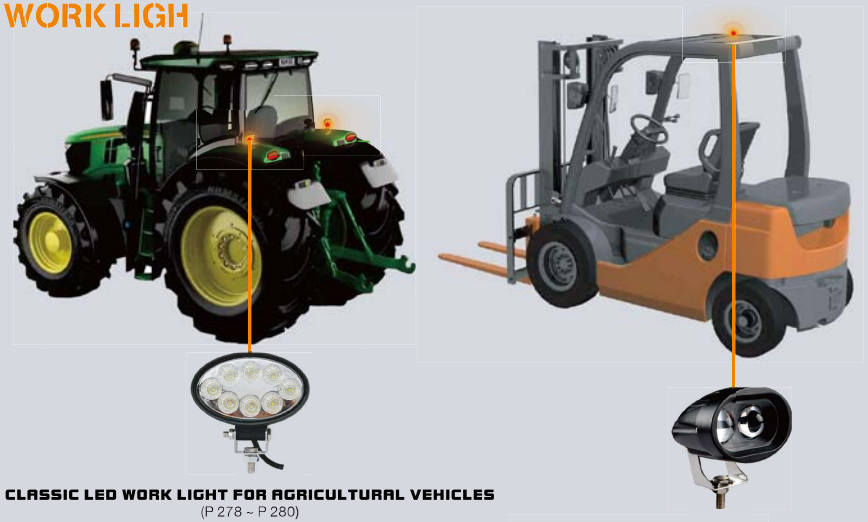

CLASSIC LED WORK LIGHT FOR AGRICULTURAL VEHICLES
(P 278 ~ P 280)

LED WARNING LIGHT FOR FOLKLIFT
(P 271 ~ P 277)

LED WORK LIGH
(P 225 ~ P 228)

LED WORK LIGH
(P 224)

Item NO.: **210050A**

1800LM **27W**





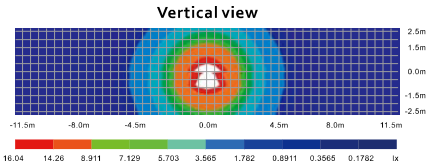

DESCRIPTION

Voltage	9-30V DC
Actual lumen	1800 lm
IP-class	IP67
Beam pattern	Spot light or Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C



AL A360 DIE-CAST HOUSING | EMRE CISPR 25 RATED | RoHS Certificatte AVAILABLE | E E-MARK AVAILABLE | Multi-Volt 9-30V DC INPUT | IP67 WATERPROOF

APPLICATION

LED work ligh

Item NO.: 210051A

1800LM **27W**

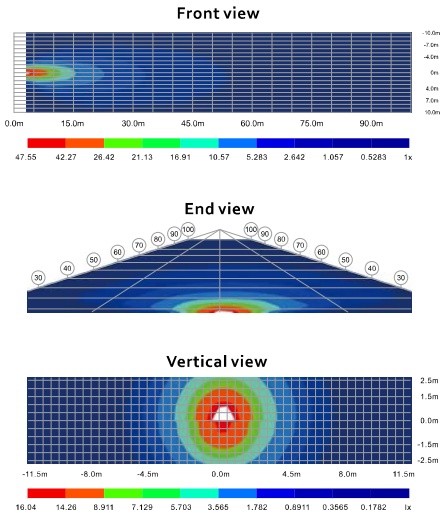

DESCRIPTION

Voltage	9-30V DC
Actual lumen	1800 lm
IP-class	IP67
Beam pattern	Spot light or Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C



AL A360 DIE-CAST HOUSING · EMIRE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210048

1200LM **18W**



DESCRIPTION

Voltage	9-30V DC
Actual lumen	1200 lm
IP-class	IP67
Beam pattern	Spot light or Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C

AL A360 DIE-CAST HOUSING · EMIRE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210095

1000LM **15W**



DESCRIPTION

Voltage	9-30V DC
Actual lumen	1000 lm
IP-class	IP67
Beam pattern	Spot light or Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C

AL A360 DIE-CAST HOUSING · EMIRE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

LED work ligh

Item NO.: 210050B

630LM **9W**



DESCRIPTION

Voltage	9-30V DC
Actual lumen	630 lm
IP-class	IP67
Beam pattern	Spot light or Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C

AL A360 DIE-CAST HOUSING · EMI-RFI CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210051B

630LM **9W**



DESCRIPTION

Voltage	9-30V DC
Actual lumen	630 lm
IP-class	IP67
Beam pattern	Spot light or Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C

AL A360 DIE-CAST HOUSING · EMI-RFI CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210052

2900LM **42W**



DESCRIPTION

Voltage	9-30V DC
Actual lumen	2900 lm
IP-class	IP67
Beam pattern	Spot light or Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C

AL A360 DIE-CAST HOUSING · EMI-RFI CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210054B

1100LM **16W**



DESCRIPTION

Voltage	9-30V DC
Actual lumen	1100 lm
IP-class	IP67
Beam pattern	Spot light or Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C

AL A360 DIE-CAST HOUSING · EMI-RFI CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210054A

3000LM 48W

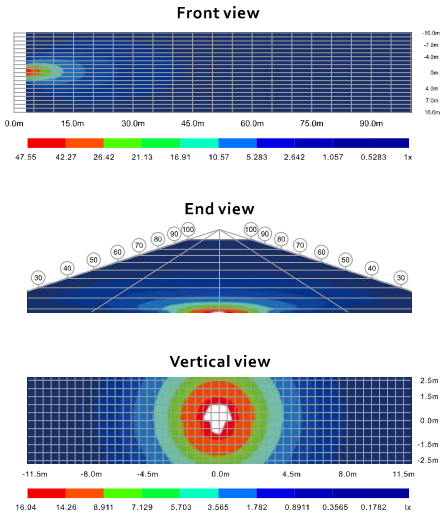

DESCRIPTION

Voltage	9-30V DC
Actual lumen	3000 lm
IP-class	IP67
Beam pattern	Spot light or Floodlight
Cable length	500mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C



AL A360 DIE-CAST HOUSING · EMI RE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210045

1200LM 18W



DESCRIPTION

Voltage	9-30V DC
Actual lumen	1200 lm
IP-class	IP67
Beam pattern	Spot light or Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C

AL A360 DIE-CAST HOUSING · EMI RE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210094

1200LM 18W



DESCRIPTION

Voltage	9-30V DC
Actual lumen	1200 lm
IP-class	IP67
Beam pattern	Spot light or Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C

AL A360 DIE-CAST HOUSING · EMI RE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

Item NO.: 210037

700LM **10W**



DESCRIPTION

Voltage	9-30V DC
Actual lumen	700 lm
IP-class	IP67
Beam pattern	Spot light or Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C

AL A360 DIE-CAST HOUSING · EMI/RFI CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210038

700LM **10W**



DESCRIPTION

Voltage	9-30V DC
Actual lumen	700 lm
IP-class	IP67
Beam pattern	Spot light or Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C

AL A360 DIE-CAST HOUSING · EMI/RFI CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210040A

900LM **12W**



DESCRIPTION

Voltage	9-30V DC
Actual lumen	900 lm
IP-class	IP67
Beam pattern	Spot light or Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C

AL A360 DIE-CAST HOUSING · EMI/RFI CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210040B

900LM **12W**



DESCRIPTION

Voltage	9-30V DC
Actual lumen	900 lm
IP-class	IP67
Beam pattern	Spot light or Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C

AL A360 DIE-CAST HOUSING · EMI/RFI CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210043A

1200LM **18W**



DESCRIPTION

Voltage	9-30V DC
Actual lumen	1200 lm
IP-class	IP67
Beam pattern	Spot light or Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C

AL A360 DIE-CAST HOUSING · EMIRE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210043B

1200LM **18W**



DESCRIPTION

Voltage	9-30V DC
Actual lumen	1200 lm
IP-class	IP67
Beam pattern	Spot light or Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C

AL A360 DIE-CAST HOUSING · EMIRE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

Item NO.: 210039

800LM **12W**



DESCRIPTION

Voltage	9-30V DC
Actual lumen	800 lm
IP-class	IP67
Beam pattern	Spot light or Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C

AL A360 DIE-CAST HOUSING · EMIRE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: LW-4020D

Universal Light

1300LM **20W**



DESCRIPTION

Voltage	9-30V DC
Actual lumen	1300 lm
IP-class	IP67
Beam pattern	Spot light or Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C

AL A360 DIE-CAST HOUSING · EMIRE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

Item NO.: **210046**

1200LM **18W**

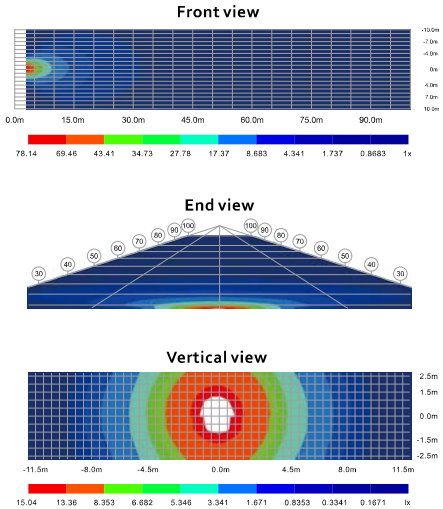

DESCRIPTION

Voltage	9-30V DC
Actual lumen	1200 lm
IP-class	IP67
Beam pattern	Spot light or Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C



APPLICATION

Item NO.: **210047A**

1200LM **18W**

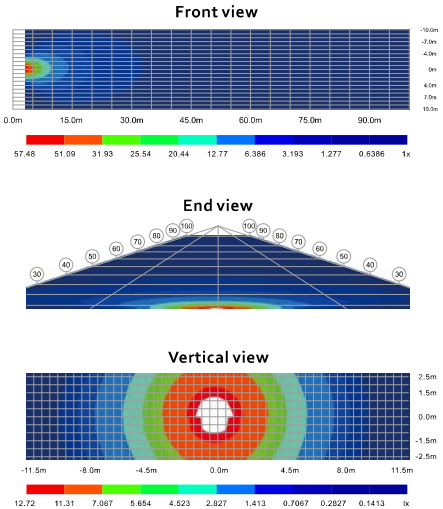

DESCRIPTION

Voltage	9-30V DC
Actual lumen	1200 lm
IP-class	IP67
Beam pattern	Spot light or Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C



APPLICATION

Item NO.: 210071

1600LM **24W**

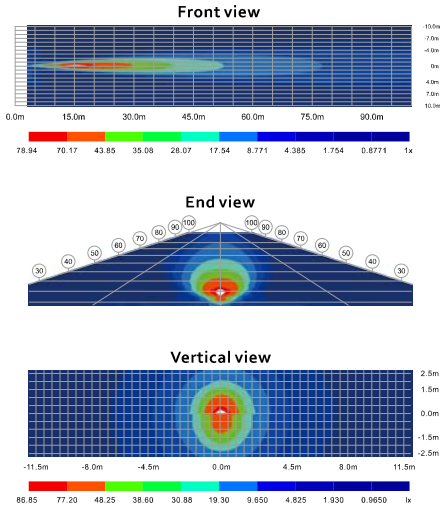

DESCRIPTION

Voltage	9-30V DC
Actual lumen	1600 lm
IP-class	IP67
Beam pattern	Spot light or Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C

AL A360 DIE-CAST · EMI-RFI CISPR 25 · RoHS Certificatte · E-MARK · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF



APPLICATION

Item NO.: 210035B

800LM **12W**

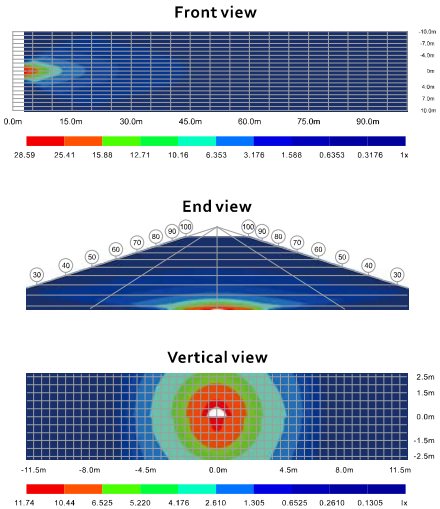

DESCRIPTION

Voltage	9-30V DC
Actual lumen	800 lm
IP-class	IP67
Beam pattern	Spot light or Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C

AL A360 DIE-CAST · EMI-RFI CISPR 25 · RoHS Certificatte · E-MARK · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF



APPLICATION

LED work ligh

Item NO.: **210058**

1400LM **20W**

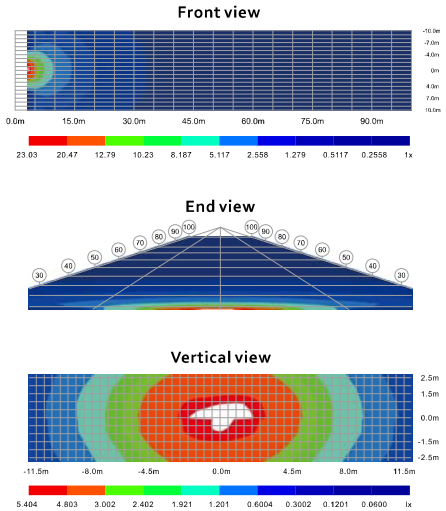

DESCRIPTION

Voltage	9-30V DC
Actual lumen	1400 lm
IP-class	IP67
Beam pattern	Spot light or Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C



APPLICATION

Item NO.: **210276**

1200LM **18W**

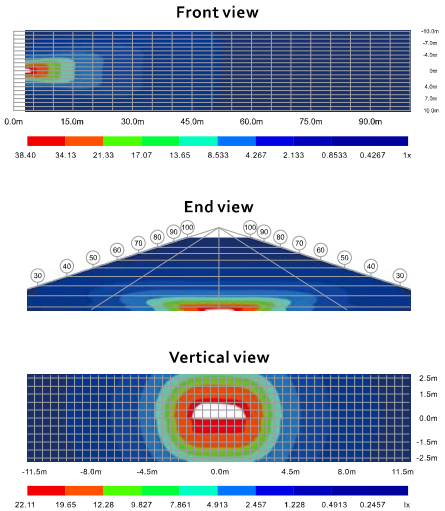

DESCRIPTION

Voltage	9-30V DC
Actual lumen	1200 lm
IP-class	IP67
Beam pattern	Spot light or Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C



APPLICATION

LED work ligh

Item NO.: **210082**

1800LM **27W**

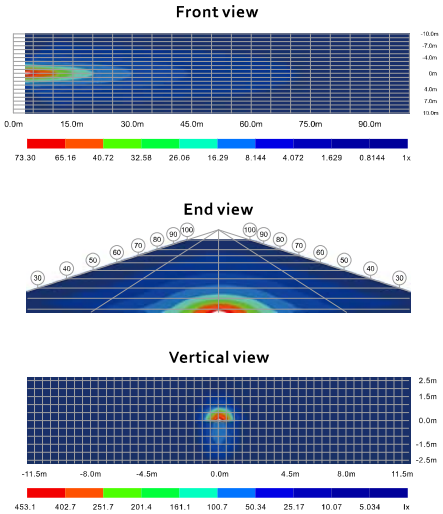

DESCRIPTION

Voltage	9-30V DC
Actual lumen	1800 lm
IP-class	IP67
Beam pattern	Spot light
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C



AL A360 DIE-CAST · EMCRE CISPR 25 · RoHS Certificatte · E-MARK · Multi-Volt 9-30V · IP67

APPLICATION

Item NO.: **210083**

1800LM **27W**

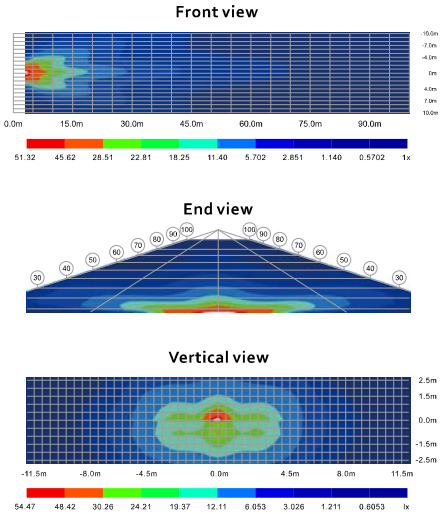

DESCRIPTION

Voltage	9-30V DC
Actual lumen	1800 lm
IP-class	IP67
Beam pattern	Spot light or Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C



AL A360 DIE-CAST · EMCRE CISPR 25 · RoHS Certificatte · E-MARK · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

LED work ligh

Item NO.: **210279**

3400LM **45W**

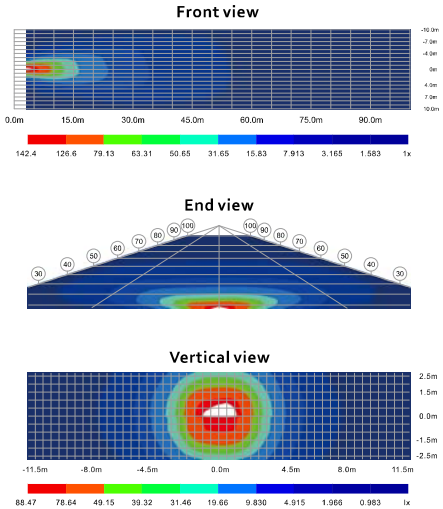

DESCRIPTION

Voltage	9-30V DC
Actual lumen	3400 lm
IP-class	IP67
Beam pattern	Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C



APPLICATION

Item NO.: **210358**

3500LM **50W**

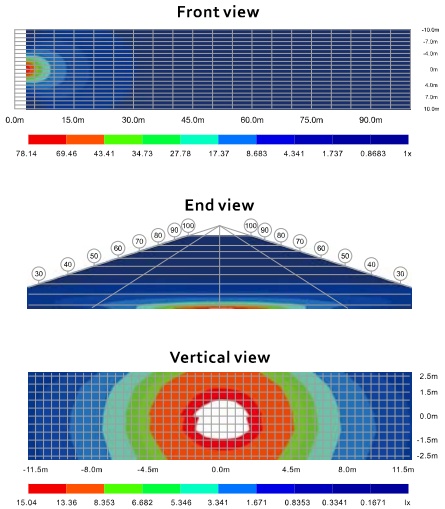

DESCRIPTION

Voltage	9-30V DC
Actual lumen	3500 lm
IP-class	IP67
Beam pattern	Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C



APPLICATION

Item NO.: **210280**

3100LM **45W**

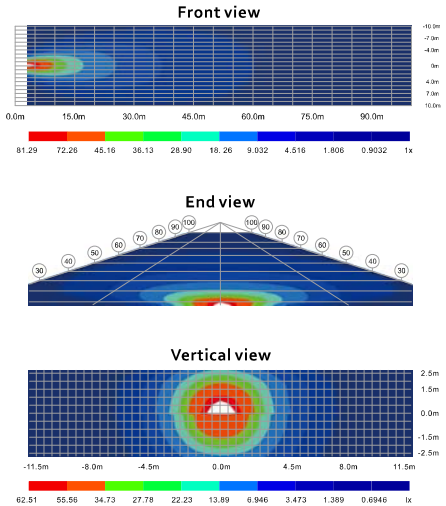

DESCRIPTION

Voltage	9-30V DC
Actual lumen	3100 lm
IP-class	IP65
Beam pattern	Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C~ +60°C



AL A360 DIE-CAST · EMIRE CISPR 25 · RoHS Certificatte · E-MARK · Multi-Volt 9-30V · IP67

APPLICATION

Item NO.: **210161**

2500LM **36W**

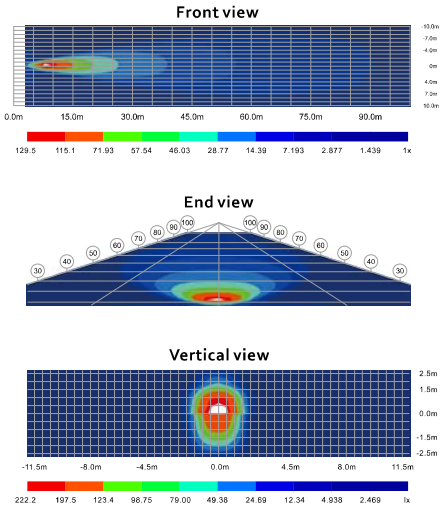

DESCRIPTION

Voltage	9-30V DC
Actual lumen	2500 lm
IP-class	IP67
Beam pattern	Spotlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C~ +60°C



AL A360 DIE-CAST · EMIRE CISPR 25 · RoHS Certificatte · E-MARK · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

LED work ligh

Item NO.: **210069**

3500LM **50W**

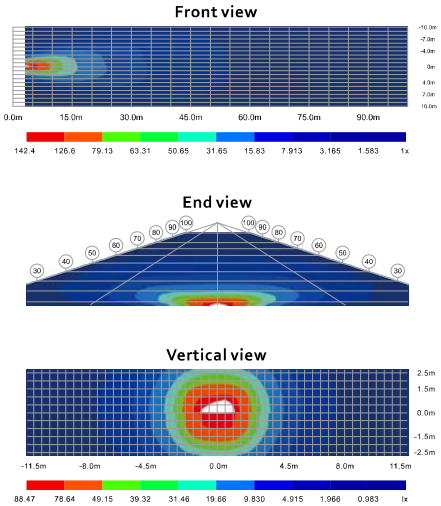

DESCRIPTION

Voltage	9-30V DC
Actual lumen	3500 lm
IP-class	IP67
Beam pattern	Spotlight or Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C~ +60°C



DIE-CAST · CISPR 25 · Certificatte · E-MARK · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: **210070**

5600LM **80W**

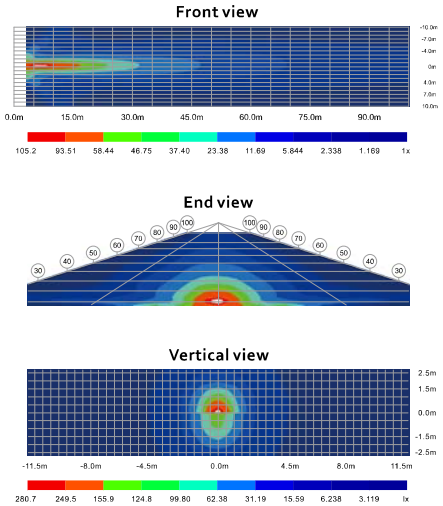

DESCRIPTION

Voltage	9-30V DC
Actual lumen	5600 lm
IP-class	IP67
Beam pattern	Spotlight or Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C~ +60°C



DIE-CAST · CISPR 25 · Certificatte · E-MARK · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

LED work ligh

Item NO.: **210096F**

3300LM **48W**

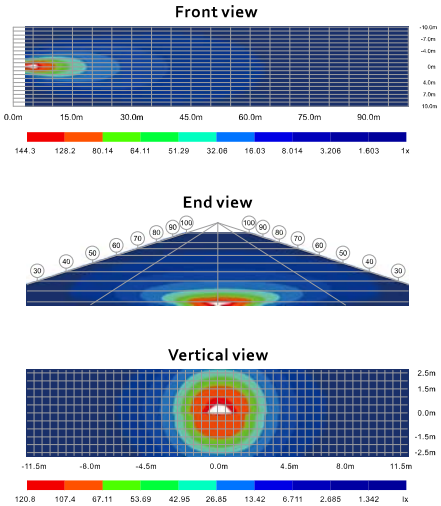

DESCRIPTION

Voltage	9-30V DC
Actual lumen	3300 lm
IP-class	IP67
Beam pattern	Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C~ +60°C



APPLICATION

Item NO.: **210096S**

3300LM **48W**

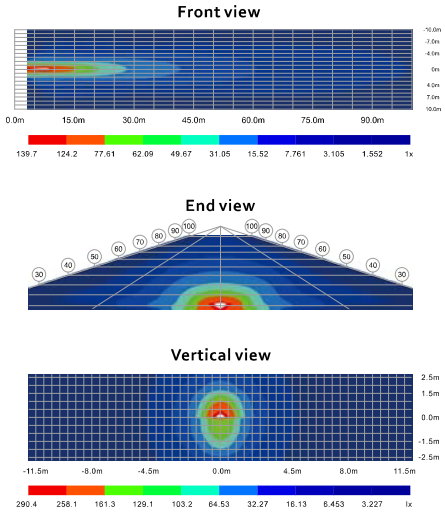

DESCRIPTION

Voltage	9-30V DC
Actual lumen	3300 lm
IP-class	IP67
Beam pattern	Spotlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C~ +60°C



APPLICATION

Item NO.: **210216**

2800LM **40W**

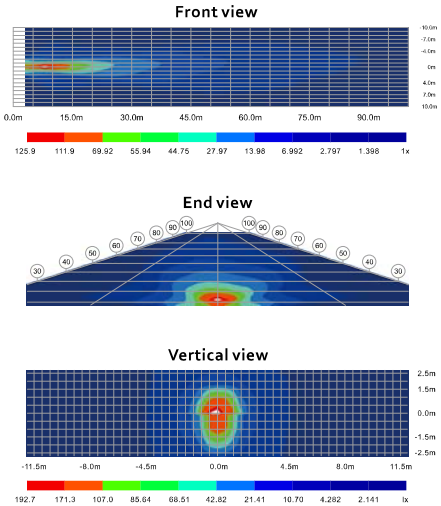

DESCRIPTION

Voltage	9-30V DC
Actual lumen	2800 lm
IP-class	IP67
Beam pattern	Combo
Cable length	500mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C~ +60°C



APPLICATION

Item NO.: **210053**

2800LM **40W**

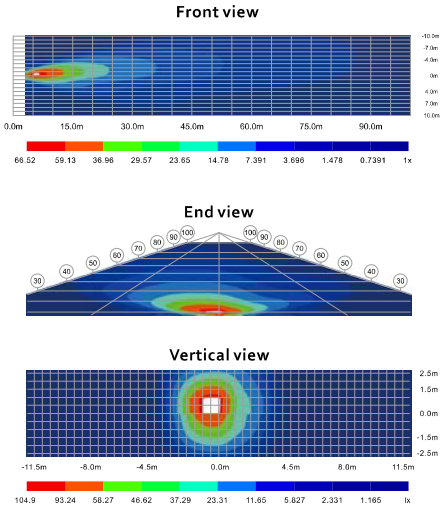

DESCRIPTION

Voltage	9-30V DC
Actual lumen	2800 lm
IP-class	IP67
Beam pattern	Spotlight or Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C



APPLICATION

Item NO.: **210049**

1600LM **24W**

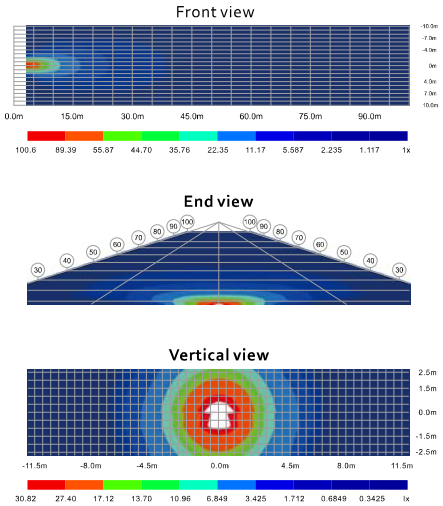

DESCRIPTION

Voltage	9-30V DC
Actual lumen	1600 lm
IP-class	IP67
Beam pattern	Spotlight or Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C



AL A360 DIE-CAST · EMVRE CISPR 25 · RoHS Certificatte · E-MARK · Multi-Volt 9-30V · IP67

APPLICATION

Item NO.: **210105S**

2500LM **36W**

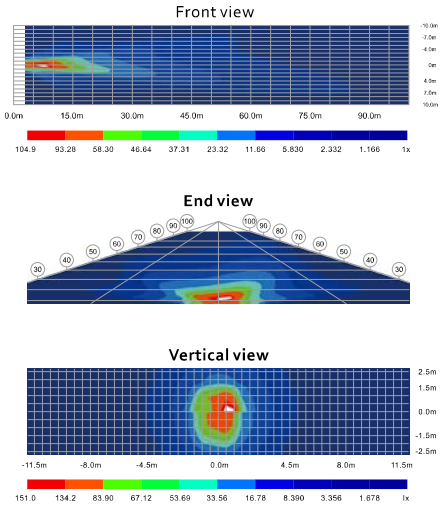

DESCRIPTION

Voltage	9-30V DC
Actual lumen	2500 lm
IP-class	IP67
Beam pattern	Spotlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C



AL A360 DIE-CAST · EMVRE CISPR 25 · RoHS Certificatte · E-MARK · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210105F

2500LM **36W**

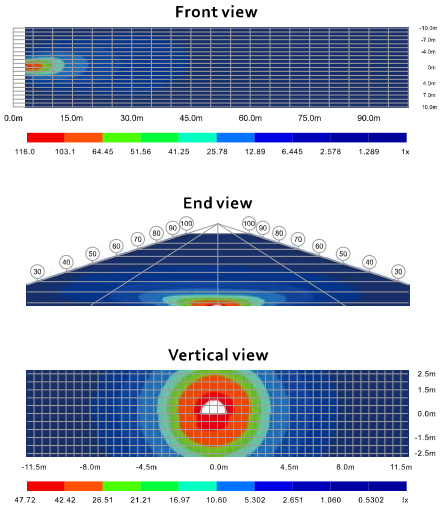

DESCRIPTION

Voltage	9-30V DC
Actual lumen	2500 lm
IP-class	IP67
Beam pattern	Floodlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C~ +60°C



AL A360 DIE-CAST · EMI RE CISPR 25 · RoHS Certificatte · E-MARK · Multi-Volt 9-30V · IP67

APPLICATION

Item NO.: 210037B

1000LM **15W**



DESCRIPTION

Voltage	9-30V DC
Actual lumen	1000 lm
IP-class	IP67
Beam pattern	Spotlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C

AL A360 DIE-CAST HOUSING · EMI RE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210160

3300LM **48W**



DESCRIPTION

Voltage	9-30V DC
Current draw	1A@12VDC
Actual lumen	3300lm
IP-class	IP65
Beam pattern	Spotlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-20°C ~ +40°C

Item NO.: 210282

6700LM **96W**

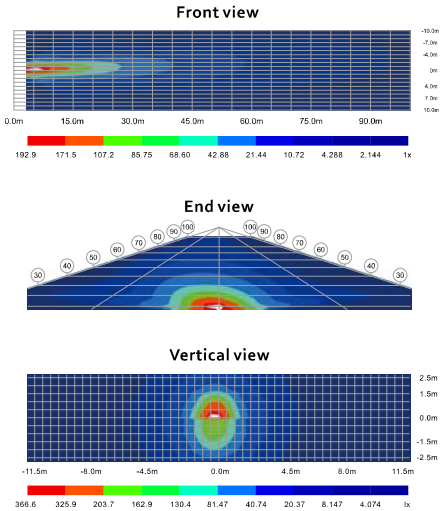

DESCRIPTION

Voltage	9-30V DC
Current draw	8A@12VDC
Actual lumen	6700lm
IP-class	IP65
Beam pattern	Spotlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-20°C~ +40°C



AL A360 DIE-CAST · EMIRE CISPR 25 · RoHS Certificatte · E-MARK · Multi-Volt 9-30V · IP65

APPLICATION

Item NO.: 210357

4000LM **70W**

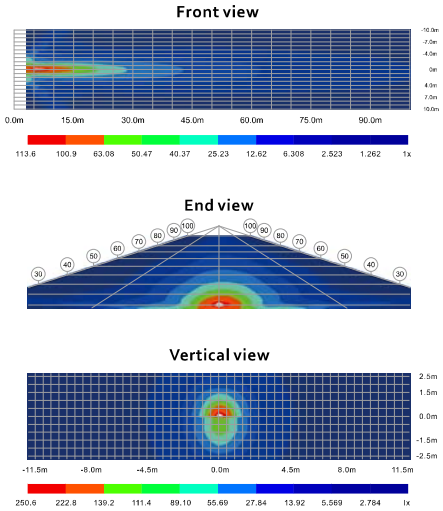

DESCRIPTION

Voltage	9-30V DC
Actual lumen	4000 lm
IP-class	IP67
Beam pattern	Spotlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C~ +60°C



AL A360 DIE-CAST · EMIRE CISPR 25 · RoHS Certificatte · E-MARK · Multi-Volt 9-3 V · IP67

APPLICATION

LED work ligh

AL A360 DIE-CAST HOUSING | EMKE CISPR 25 RATED | RoHS Certificatte AVAILABLE | E-MARK AVAILABLE | Multi-Volt 9-30V DC INPUT | IP67 WATERPROOF

Universal Light

210050P 210051P

27W

1800LM

- Multi-Voltage: 9-30V DC
- High Intensity LED
- Beam Type: Flood beam or Spot Beam
- Output Lumen: 1800lm
- Die cast aluminium housing , PMMA Lens
- Stainless steel mounting hardware 5/16"-18 stud
- Color Temperature: 6000K
- Dust and Waterproof to Ip67

EUROPE ROTATING BEACON ACCESSORIES

APPLICATION

Item NO.: **210355**

2800LM **40W**

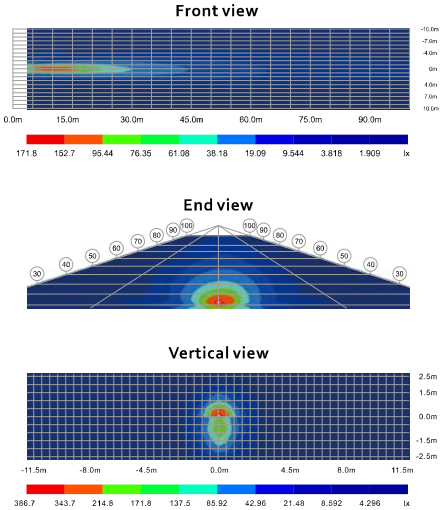

DESCRIPTION

Voltage	9-30V DC
Actual lumen	2800 lm
IP-class	IP67
Beam pattern	Spotlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C~ +60°C



APPLICATION

Item NO.: **210356**

4200LM **60W**

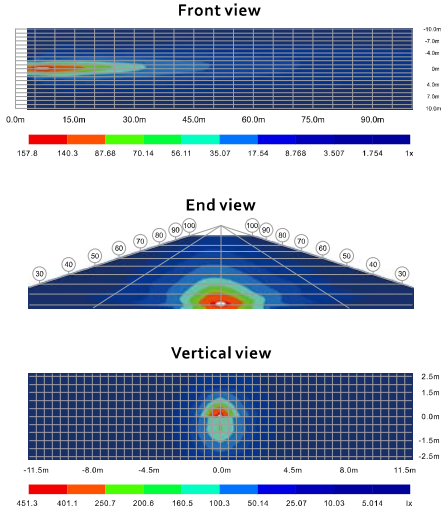

DESCRIPTION

Voltage	9-30V DC
Actual lumen	4200 lm
IP-class	IP67
Beam pattern	Spotlight
Cable length	500mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C



APPLICATION

Item NO.: **210353**

4400LM **63W**

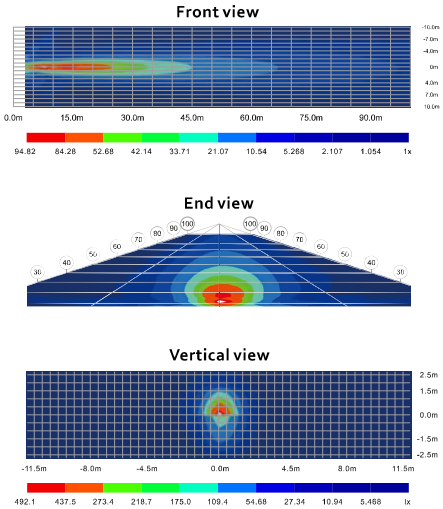

DESCRIPTION

Voltage	9-30V DC
Actual lumen	4400 lm
IP-class	IP67
Beam pattern	Spotlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C



APPLICATION

Item NO.: **210354**

3100LM **45W**

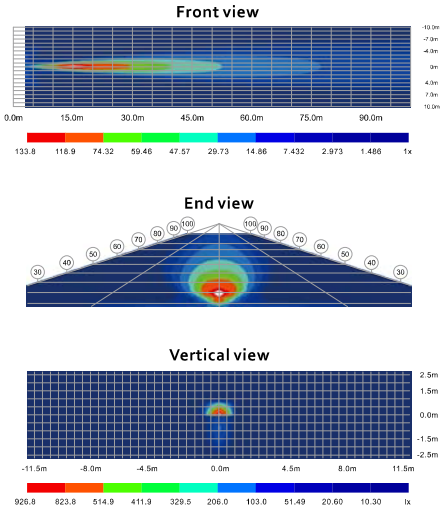

DESCRIPTION

Voltage	9-30V DC
Actual lumen	3100 lm
IP-class	IP67
Beam pattern	Spotlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C



APPLICATION

LED work ligh

Item NO.: 210352

3700LM **54W**

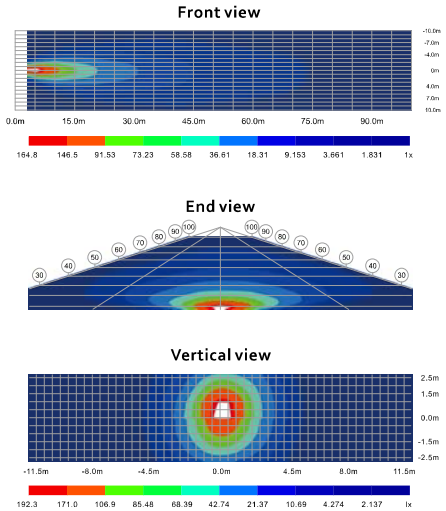

DESCRIPTION

Voltage	9-30V DC
Actual lumen	3700 lm
IP-class	IP67
Beam pattern	Spotlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C



AL A360 DIE-CAST · EMIRE CISPR 25 · RoHS Certificatte · E-MARK · Multi-Volt 9-30V · IP67

APPLICATION

Item NO.: 210091

2800LM **36W**

DESCRIPTION

Voltage	9-30V DC
Actual lumen	2800 lm
IP-class	IP67
Beam pattern	Spotlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C

Design for Forklift · AL A360 DIE-CAST · EMIRE CISPR 25 · RoHS Certificatte · E-MARK · Multi-Volt 9-30V · IP67

APPLICATION

Item NO.: 210091B

2800LM **36W**

DESCRIPTION

Voltage	9-30V DC
Actual lumen	2800 lm
IP-class	IP67
Beam pattern	Spotlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C

Design for Forklift · AL A360 DIE-CAST · EMIRE CISPR 25 · RoHS Certificatte · E-MARK · Multi-Volt 9-30V · IP67

APPLICATION

Item NO.: **210350**

4200LM **60W**

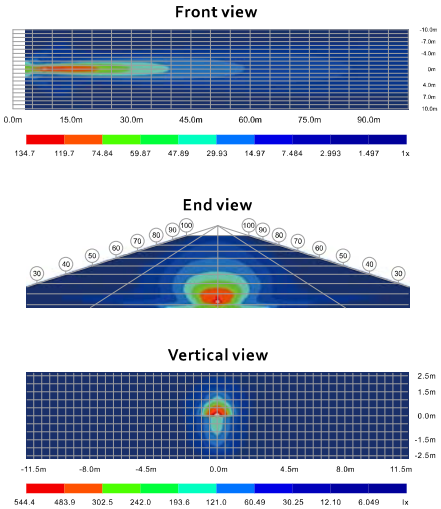

DESCRIPTION

Voltage	9-30V DC
Actual lumen	4200 lm
IP-class	IP67
Beam pattern	Spotlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C



APPLICATION

Item NO.: **210351**

3100LM **45W**

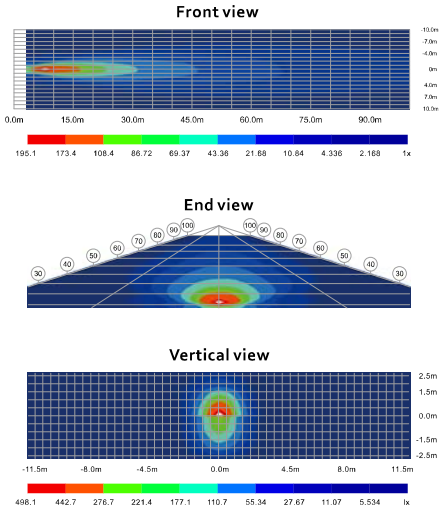

DESCRIPTION

Voltage	9-30V DC
Actual lumen	3100 lm
IP-class	IP67
Beam pattern	Spotlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C



APPLICATION

LED work ligh

Item NO.: **210018**

2800LM **40W**

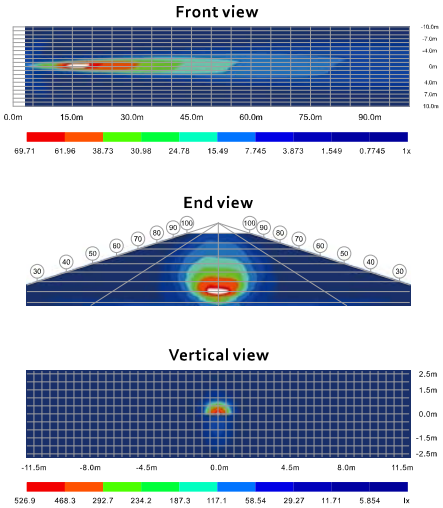

DESCRIPTION

Voltage	9-30V DC
Actual lumen	2800 lm
IP-class	IP67
Beam pattern	Spotlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C



APPLICATION

Item NO.: **210061**

4200LM **60W**

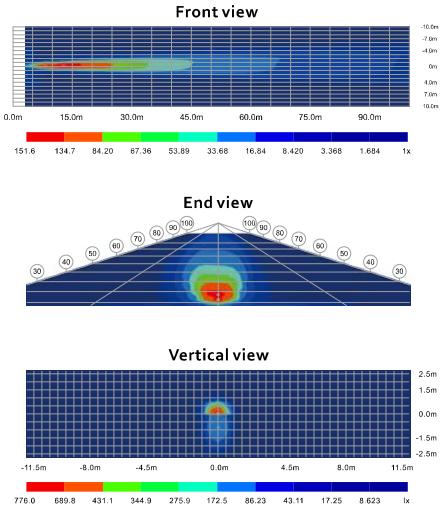

DESCRIPTION

Voltage	9-30V DC
Actual lumen	4200 lm
IP-class	IP67
Beam pattern	Spotlight
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C



APPLICATION

Item NO.: 210179

420LM **6W**



DESCRIPTION

Voltage	9-30V DC
Actual lumen	420 lm
IP-class	IP67
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C

AL A360 DIE-CAST HOUSING · EMRE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210178

560LM **8W**



DESCRIPTION

Voltage	9-30V DC
Actual lumen	560 lm
IP-class	IP67
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C

AL A360 DIE-CAST HOUSING · EMRE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210195B

350LM **5W**



DESCRIPTION

Voltage	9-30V DC
Actual lumen	350 lm
IP-clas	IP67
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C

AL A360 DIE-CAST HOUSING · EMRE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210180

840LM **12W**



DESCRIPTION

Voltage	9-30V DC
Actual lumen	480 lm
IP-class	IP67
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C

AL A360 DIE-CAST HOUSING · EMRE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

LED Reversing work light

Item NO.: 210345

630LM **9W**



DESCRIPTION

Voltage	9-30V DC
Actual lumen	630 lm
IP-class	IP67
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C

AL A360 DIE-CAST HOUSING · EMRE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210346

630LM **9W**



DESCRIPTION

Voltage	9-30V DC
Actual lumen	630 lm
IP-class	IP67
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C

AL A360 DIE-CAST HOUSING · EMRE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210099

1000LM **16W**



DESCRIPTION

Voltage	9-30V DC
Actual lumen	1000 lm
IP-class	IP67
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C

AL A360 DIE-CAST HOUSING · EMRE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Item NO.: 210098

900LM **14W**



DESCRIPTION

Voltage	9-30V DC
Actual lumen	900 lm
IP-class	IP67
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C ~ +60°C

AL A360 DIE-CAST HOUSING · EMRE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF

APPLICATION

Technical specification:

- universal supply votlage – from 12V up to 55V DC
- power consumption: 12V/24V/48V = 1,1A/0,55A/0,28A
- rated power: 13,5W
- color temperature: around 6.000K (Kelvin)
- effective (measured) light beam – min. 1.300 lm
- 9 x OSRAM LED's
- ElectroMagnetic Compatibility – EMC certificate
- full waterproofness (IP68)
- shock-resistance – IK
- operating temperature: – 40°C to + 35°C
- reverse polarity protection system
- fixed polarisation: GROUND – white wire; (+) – black wire



LED

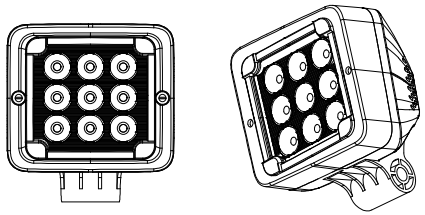

LW-18002

H1

LW-18003

APPLICATION

Technical specification:

- universal supply votlage – from 12V up to 55V DC
- rated power: 13,5W
- color temperature: around 6.000K (Kelvin)
- effective (measured) light beam – min. 1.300 lm
- 9 x OSRAM LED's
- ElectroMagnetic Compatibility – EMC certificate
- full waterproofness (IP68)
- shock-resistance – IK
- operating temperature: – 40°C to + 60°C
- reverse polarity protection system
- fixed polarisation: GROUND – white wire; (+) – black wire

LED



LW-18007

Fits - Claas Choppers and Lexion 400-500 Series Combines
Choppers: 820, 830, 840, 850, 860, 870, 880, 890, 900; **Lexion 400 Series Combines:** 450, 460, 460R, 470, 470R, 475, 475R, 480, 480R, 485, 485R; **Lexion 500 Series Combines:** 560, 560R, 570, 570R, 575R, 580R, 585R, 590R, 595R

APPLICATION

LED work lamps

NICAR®

We Make

your Working More Safety & More Efficient

Safety First!

Item NO.: 210032C

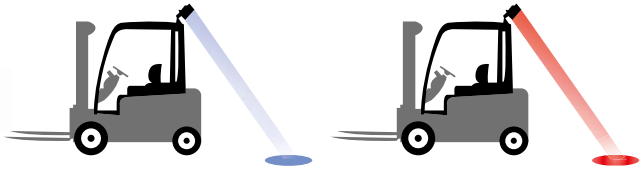

Improves Safety
Bright blue light on the floor helps alert pedestrians to approaching forklifts. Especially helpful at blind intersections or rack aisles with loud ambient noise.

Easy to Operate
The light is designed to use vehicle power to operate. Light turns on anytime forklift starts work. No one has to remember to activate it.

9-30V DC Wide Voltage
Multi-voltage from 9V - 30V to fit almost all industrial vehicles including forklifts, walkies, loaders, AGVs etc.

Bright White and Blue Color Optional
The light can be mounted to front, back, or both ends of a vehicle. Bright and visible white and blue color for customers' choice.

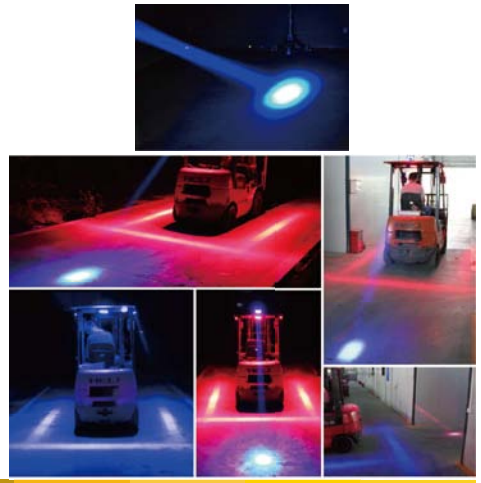

DESCRIPTION

Voltage	9-30V DC
IP-class	IP67
Beam pattern	Warning "Spot"
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C~ +60°C



AL A360 DIE-CAST | EMIRE CISPR 25 | RoHS Certificatte | E-MARK | Multi-Volt 9-30V DC INPUT | IP67 WATERPROOF

APPLICATION

Item NO.: LW-9017

Universal Light

DESCRIPTION

Voltage	9-30V DC
IP-class	IP67
Beam pattern	Warning "Line"
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C~ +60°C

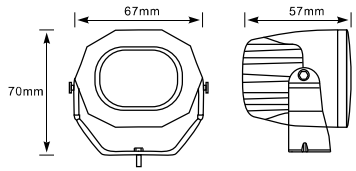

AL A360 DIE-CAST | EMIRE CISPR 25 | RoHS Certificatte | E-MARK | Multi-Volt 9-30V DC INPUT | IP67 WATERPROOF

APPLICATION

LED Warning Light For Folklift

Item NO.: 210032D

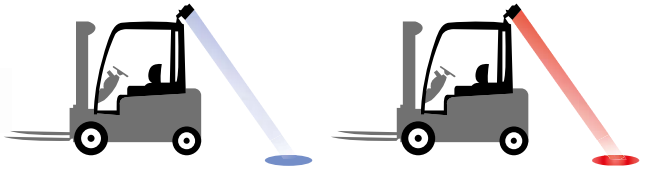

Improves Safety
Bright blue light on the floor helps alert pedestrians to approaching forklifts. Especially helpful at blind intersections or rack aisles with loud ambient noise.

Easy to Operate
The light is designed to use vehicle power to operate. Light turns on anytime forklift starts work. No one has to remember to activate it.

9-30V DC Wide Voltage
Multi-voltage from 9V - 30V to fit almost all industrial vehicles including forklifts, walkies, loaders, AGVs etc.

Bright White and Blue Color Optional
The light can be mounted to front, back, or both ends of a vehicle. Bright and visible white and blue color for customers' choice.

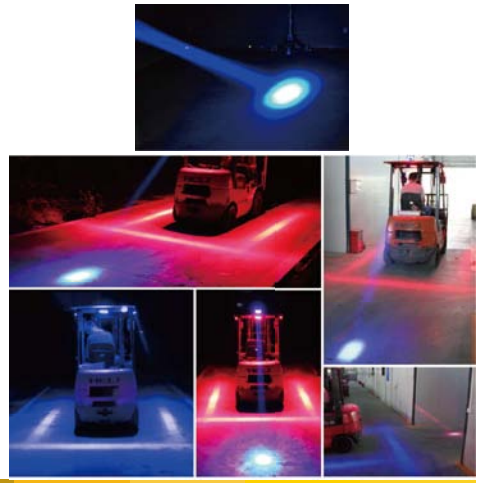

DESCRIPTION

Voltage	9-30V DC
IP-class	IP67
Beam pattern	Warning "Spot"
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C~ +60°C



AL A360 DIE-CAST | EMIRE CISPR 25 | RoHS Certificatte | E-MARK | Multi-Volt 9-30V DC INPUT | IP67 WATERPROOF

APPLICATION

Item NO.: 210033

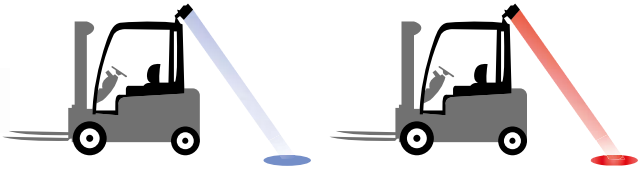

Improves Safety
Bright blue light on the floor helps alert pedestrians to approaching forklifts. Especially helpful at blind intersections or rack aisles with loud ambient noise.

Easy to Operate
The light is designed to use vehicle power to operate. Light turns on anytime forklift starts work. No one has to remember to activate it.

9-30V DC Wide Voltage
Multi-voltage from 9V - 30V to fit almost all industrial vehicles including forklifts, walkies, loaders, AGVs etc.

Bright White and Blue Color Optional
The light can be mounted to front, back, or both ends of a vehicle. Bright and visible white and blue color for customers' choice.

DESCRIPTION

Voltage	9-30V DC
IP-class	IP67
Beam pattern	Warning "Spot"
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C~ +60°C



AL A360 DIE-CAST | EMIRE CISPR 25 | RoHS Certificatte | E-MARK | Multi-Volt 9-30V DC INPUT | IP67 WATERPROOF

APPLICATION

LED Warning Light For Folklift

Item NO.: 210093

Improves Safety
Bright blue light on the floor helps alert pedestrians to approaching forklifts. Especially helpful at blind intersections or rack aisles with loud ambient noise.

Easy to Operate
The light is designed to use vehicle power to operate. Light turns on anytime forklift starts work. No one has to remember to activate it.

9-30V DC Wide Voltage
Multi-voltage from 9V - 30V to fit almost all industrial vehicles including forklifts, walkies, loaders, AGVs etc.

Bright White and Blue Color Optional
The light can be mounted to front, back, or both ends of a vehicle. Bright and visible white and blue color for customers' choice.

DESCRIPTION

Voltage	9-30V DC
IP-class	IP67
Beam pattern	Warning "Line"
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C~ +60°C



AL A360 DIE-CAST | EMRE CISPR 25 | RoHS Certificatte | E-MARK | Multi-Volt 9-30V DC INPUT | IP67 WATERPROOF

APPLICATION

Item NO.: 210359

Improves Safety
Bright blue light on the floor helps alert pedestrians to approaching forklifts. Especially helpful at blind intersections or rack aisles with loud ambient noise.

Easy to Operate
The light is designed to use vehicle power to operate. Light turns on anytime forklift starts work. No one has to remember to activate it.

9-30V DC Wide Voltage
Multi-voltage from 9V - 30V to fit almost all industrial vehicles including forklifts, walkies, loaders, AGVs etc.

Bright White and Blue Color Optional
The light can be mounted to front, back, or both ends of a vehicle. Bright and visible white and blue color for customers' choice.

DESCRIPTION

Voltage	9-30V DC
IP-class	IP67
Beam pattern	Warning "Line"
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C~ +60°C



AL A360 DIE-CAST | EMRE CISPR 25 | RoHS Certificatte | E-MARK | Multi-Volt 9-30V | IP67

APPLICATION

LED Warning Light For Folklift

Item NO.: **210378**

Improves Safety
Bright blue light on the floor helps alert pedestrians to approaching forklifts. Especially helpful at blind intersections or rack aisles with loud ambient noise.

Easy to Operate
The light is designed to use vehicle power to operate. Light turns on anytime forklift starts work. No one has to remember to activate it.

9-30V DC Wide Voltage
Multi-voltage from 9V - 30V to fit almost all industrial vehicles including forklifts, walkies, loaders, AGVs etc.

Bright White and Blue Color Optional
The light can be mounted to front, back, or both ends of a vehicle. Bright and visible white and blue color for customers' choice.

DESCRIPTION

Voltage	9-30V DC
IP-class	IP67
Beam pattern	Warning "Line"
Cable length	450mm
Material housing	Aluminium
Material lens	Polycarbonate
Operating temperature	-40°C~ +60°C

AL A360 DIE-CAST · EMI RE CISPR 25 · RoHS Certificatte · E-MARK · Multi-Volt 9-30V DC INPUT · IP67 WATERPROOF



APPLICATION

Characteristic

Perfect Replace Original light with Halogen Bulb !
50000Hours Lifespan !
Low Power Consumption !
High Brightness LED, Garantee the long projecting distance !

Suit For

John Deere Tractor: 7200 7210 7400 7410 7510 7600 7610 7700 7710 7800 7810 8100 8100T 8200 8200T 8210 8210T 8300 8300T 8310 8400 8410 8410T 9100 9200 9300 9300T 9400 9400T
John Deere Sprayer: 4700 4710
John Deere Windrower : 4890 4895 4990 4995

Item NO.: **210049-N**

24W

Input Voltage:9-30V
Light source: 3W High Intensity LED, 8PCS
Power:24W
LED Color: White & Amber
Material: Aluminium Alloy die-cast housing, PC cover, stainless steel bracket
Working environment: -40°C~+60°C
Optional beam: Flood beam or Spot Beam
IP:67
Life time:>50000h



APPLICATION

NEW

Item NO.: 210209



27W



Input Voltage:9-30V
Light source: 3W High Intensity LED, 9PCS
Power:27W
Lumen:1620lm
Color Temperature: 6500K
Material: Aluminium Alloy die-cast housing,
PC cover, stainless steel bracket
Working environment: -40°C～+60°C
Optional beam: Flood beam or Spot Beam
IP:67
Life time:>50000h

Design for Tractor

Item NO.: 210222



40W

Input Voltage:9-30V DC
Light source: 3W High Intensity LED, 12PCS
Power:36W
Lumen:2160 LM
Color Temperature: 6500K
Material: Aluminium Alloy die-cast housing,
PC cover, stainless steel bracket
Working environment: -40°C～+60°C
Optional beam: Flood beam or Spot Beam
IP:67
Life time:>50000h

Design for Tractor

Item NO.: 210049V

Item NO.: 210049

24W

Input Voltage:9-30V
Light source: 3W High Intensity LED, 8PCS
Power:24W
Lumen:1440lm
Color Temperature: 6500K
Material: Aluminium Alloy die-cast housing,
PC cover, stainless steel bracket
Working environment: -40°C～+60°C
Optional beam: Flood beam or Spot Beam
IP:67
Life time:>50000h



APPLICATION

NEW

Item NO.: 210106S

(Spotlight)

Item NO.: 210106F

(Floodlight)



27W

Input Voltage:9-30V DC
Light source: 3W High Intensity LED, 9PCS
Power:27W
Lumen:1620lm
Color Temperature: 6500K
Material: Aluminium Alloy die-cast housing,
PC cover, stainless steel bracket
Working environment: -40°C～+60°C
Optional beam: Flood beam or Spot Beam
IP:67
Life time:>50000h

Design for Tractor

Item NO.: 210105S

(Spotlight)

Item NO.: 210105F

(Floodlight)



36W

Input Voltage:9-30V DC
Light source: 3W High Intensity LED, 12PCS
Power:36W
Lumen:2160 LM
Color Temperature: 6500K
Material: Aluminium Alloy die-cast housing,
PC cover, stainless steel bracket
Working environment: -40°C～+60°C
Optional beam: Flood beam or Spot Beam
IP:67
Life time:>50000h

Design for Tractor

Item NO.: 210049AW



24W

Input Voltage:9-30V DC
Light source: 3W High Intensity LED, 8PCS
Power:24W
LED Color: White & Amber
Material: Aluminium Alloy die-cast housing,
PC cover, stainless steel bracket
Working environment: -40°C～+60°C
Optional beam: Flood beam or Spot Beam
IP:67
Life time:>50000h

Design for Tractor

APPLICATION

Classic LED Work Light for Agricultural vehicles

The worklamp offers the latest technology and the very brightest white light for your application.

This LED model offers over 80,000 hours of maintenance free life expectancy coupled with extremely low amp draw. Features include five 3-watt LEDs, aluminium heatsink housing, and acrylic lens.

AL A360 DIE-CAST HOUSING · EMPRE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 12-24V DC INPUT · IP67 WATERPROOF

PWLP-0005-27W 9 LED

PWLP-0001-15W 5 LED

PWLP-0004-24W 8 LED

PWLP-0007-27W 9 LED

PWLP-0009-48W 16 LED

PWLP-0008-42W 14 LED

PWLP-0002-18W 6 LED

PWLP-0003-24W 8 LED

PWLP-0006-27W 9 LED

MODEL	LUMEN	BEAM	HOUSING COLOUR	ILLUMINATION COLOUR	
PWLP-0001-15W	1000LM	Flood	Black	White	5 LED
PWLP-0002-18W	1200LM	Flood	Black	White	6 LED
PWLP-0003-24W	1600LM	Flood	Black	White	8 LED
PWLP-0004-24W	1600LM	Flood	Black	White	8 LED
PWLP-0005-27W	1800LM	Flood	Black	White	9 LED
PWLP-0006-27W	1800LM	Flood	Black	White	9 LED
PWLP-0007-27W	1800LM	Flood	Black	White	9 LED
PWLP-0008-42W	2800LM	Flood	Black	White	14 LED
PWLP-0009-48W	3200LM	Flood	Black	White	16 LED

APPLICATION

The worklamp offers the latest technology and the very brightest white light for your application.

This LED model offers over 80,000 hours of maintenance free life expectancy coupled with extremely low amp draw. Features include five 3-watt LEDs, aluminium heatsink housing, and acrylic lens.

AL A360 DIE-CAST HOUSING · EMPRE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 12-24V DC INPUT · IP67 WATERPROOF

PWL-0007-27W 9 LED

PWL-0003-24W 8 LED

PWL-0005-27W 9 LED

PWL-0008-42W 14 LED

PWL-0004-24W 8 LED

PWL-0002-18W 6 LED

PWL-0009-48W 16 LED

PWL-0001-15W 5 LED

PWL-0006-27W 9 LED

MODEL	LUMEN	BEAM	HOUSING COLOUR	ILLUMINATION COLOUR	
PWL-0001-15W	1000LM	Flood	Black	White	5 LED
PWL-0002-18W	1200LM	Flood	Black	White	6 LED
PWL-0003-24W	1600LM	Flood	Black	White	8 LED
PWL-0004-24W	1600LM	Flood	Black	White	8 LED
PWL-0005-27W	1800LM	Flood	Black	White	9 LED
PWL-0006-27W	1800LM	Flood	Black	White	9 LED
PWL-0007-27W	1800LM	Flood	Black	White	9 LED
PWL-0008-42W	2800LM	Flood	Black	White	14 LED
PWL-0009-48W	3200LM	Flood	Black	White	16 LED

APPLICATION

SQUARE MAGNETIC LED

Featuring a high intensity flood beam and three operating modes (100% intensity, 30% intensity & SOS flashing) this heavy duty battery powered worklamp combines mobility with high performance and a compact design. The long-life, lithium rechargeable battery allows the worklamp to be operated for 3-4 hours before recharging is required.

Dual-colour CA feature five operating modes (100% intensity white, 30% intensity white, 100% intensity amber, double flash amber and quad flash amber).

AL A360 DIE-CAST HOUSING · EMPRE CISPR 25 RATED · RoHS Certificatte AVAILABLE · E-MARK AVAILABLE · Multi-Volt 12-24V DC INPUT · IP67 WATERPROOF

PWLR-0001-15W

PWLR-0002-18W · PWLR-0005-27W · PWLR-0004-24W · PWLR-0006-27W · PWLR-0007-27W · PWLR-0008-42W · PWLR-0009-48W · PWLR-0003-24W

MODEL	LUMEN	BEAM	HOUSING COLOUR	ILLUMINATION COLOUR	
PWLR-0001-15W	1000LM	Flood	Black	White	5 LED
PWLR-0002-18W	1200LM	Flood	Black	White	6 LED
PWLR-0003-24W	1600LM	Flood	Black	White	8 LED
PWLR-0004-24W	1600LM	Flood	Black	White	8 LED
PWLR-0005-27W	1800LM	Flood	Black	White	9 LED
PWLR-0006-27W	1800LM	Flood	Black	White	9 LED
PWLR-0007-27W	1800LM	Flood	Black	White	9 LED
PWLR-0008-42W	2800LM	Flood	Black	White	14 LED
PWLR-0009-48W	3200LM	Flood	Black	White	16 LED

APPLICATION

APPLICATION

Universal Light



Specification

1 >Voltage:DC9～32V
2 >Light Source:3W/LED
3 > Housing Material:Aluminium Alloy
4 >Lens Material: PC
5 >Beam Pattern: Spot/Flood
6 >Amber lens & Clear Lens Combined

E9 E9-10R-05.11740

Modle	Size	Size（mm）	LED Quantity	LED Ship	Power	Lumens	Beam pattern
LW-5918N	4"	99x73x107	6	3W Cree	18W	1260LM	Flood/Spot
LW-5936N	7"	167x73x107	12	3W Cree	36W	2520LM	Flood/Spot
LW-5972N	12"	305x73x107	24	3W Cree	72W	5040LM	Flood/Spot/Combo
LW-59108N	17"	438x73x107	36	3W Cree	108W	7560LM	Flood/Spot/Combo
LW-59126N	20"	505x73x107	42	3W Cree	126W	8820LM	Flood/Spot/Combo
LW-59180N	28"	715x73x107	60	3W Cree	180W	12600LM	Flood/Spot/Combo
LW-59234N	36"	914x73x107	78	3W Cree	234W	16380LM	Flood/Spot/Combo
LW-59288N	43"	1089x73x107	96	3W Cree	288W	20160LM	Flood/Spot/Combo

Universal Light



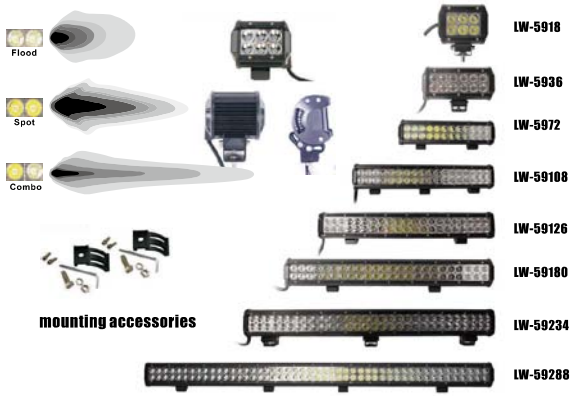

Specification

1 >Voltage:DC9～32V
2 >Light Source:3W/LED
3 > Housing Material:Aluminium Alloy
4 >Lens Material: PC
5 >Beam Pattern: Spot/Flood
6 >Amber lens & Clear Lens Combined

E9 E9-10R-05.11740

Modle	Size	Size（mm）	LED Quantity	LED Ship	Power	Lumens	Beam pattern
LW-5918	4"	99x73x107	6	3W Cree	18W	1260LM	Flood/Spot
LW-5936	7"	167x73x107	12	3W Cree	36W	2520LM	Flood/Spot
LW-5972	12"	305x73x107	24	3W Cree	72W	5040LM	Flood/Spot/Combo
LW-59108	17"	438x73x107	36	3W Cree	108W	7560LM	Flood/Spot/Combo
LW-59126	20"	505x73x107	42	3W Cree	126W	8820LM	Flood/Spot/Combo
LW-59180	28"	715x73x107	60	3W Cree	180W	12600LM	Flood/Spot/Combo
LW-59234	36"	914x73x107	78	3W Cree	234W	16380LM	Flood/Spot/Combo
LW-59288	43"	1089x73x107	96	3W Cree	288W	20160LM	Flood/Spot/Combo

APPLICATION

E9 E9-10R-05.11342

Universal Light

Specification

1 >Voltage:DC9～32V
2 >Light Source: 3W/LED
3 > Housing Material:Aluminium Alloy
4 >Lens Material: PC
5 >Beam Pattern: Spot/Flood
6 >Amber lens & Clear Lens Combined

Modle	Size	Size（mm）	LED Quantity	LED Ship	Power	Lumens	Beam pattern
LW-5136N	7.5"	210x82x88	12	3W Cree	36W	2520LM	Flood/Spot/Combo
LW-5172N	13.5"	360x82x88	24	3W Cree	72W	5040LM	Flood/Spot/Combo
LW-51120N	21.5"	560x82x88	40	3W Cree	120W	8400LM	Flood/Spot/Combo
LW-51180N	31.5"	810x82x88	60	3W Cree	180W	12600LM	Flood/Spot/Combo
LW-51240N	41.5"	1060x82x88	80	3W Cree	240W	16800LM	Flood/Spot/Combo
LW-51300N	50"	1310x82x88	100	3W Cree	300W	21000LM	Flood/Spot/Combo

E9 E9-10R-05.11342

Universal Light

Double Color Light Bar With Remote

Specification

1 >Voltage:DC9～32V
2 >Light Source: 3W/LED
3 > Housing Material:Aluminium Alloy
4 >Lens Material: PC
5 >Beam Pattern: Spot/Flood
6 >Amber Color & White Color Combined

Modle	Size	Size（mm）	LED Quantity	LED Ship	Power	Lumens	Beam pattern
LW-5136DR	7.5"	210x82x88	12	3W Epistar	36W	2520LM	Flood/Spot/Combo
LW-5172DR	13.5"	360x82x88	24	3W Epistar	72W	5040LM	Flood/Spot/Combo
LW-51120DR	21.5"	560x82x88	40	3W Epistar	120W	8400LM	Flood/Spot/Combo
LW-51180DR	31.5"	810x82x88	60	3W Epistar	180W	12600LM	Flood/Spot/Combo
LW-51240DR	41.5"	1060x82x88	80	3W Epistar	240W	16800LM	Flood/Spot/Combo
LW-51300DR	50"	1310x82x88	100	3W Epistar	300W	21000LM	Flood/Spot/Combo

APPLICATION

Universal Light

Changeable Color Temperature

1>Housing Material: Aluminum
2>Bracket Material: stainless steel
3>Lens Material : PC
4>Beam Pattern: Flood

LW-35300

LW-35240

LW-35180

LW-35120

Toning temperature

6500k Light effect 1900k Light effect

Modle	Size	Size（mm）	LED Quantity	LED Ship	Power	Lumens	Beam pattern
LW-35120	21.5"	560x82x88	180	1W ETI	120W	8400LM	Flood
LW-35180	31.5"	810x82x88	270	1W ETI	180W	1260LM	Flood
LW-35240	41.5"	1060x82x88	360	1W ETI	240W	16800LM	Flood
LW-35300	51.5"	1310x82x88	450	1W ETI	300W	21000LM	Flood

Universal Light

With 4D lens

1>Housing Material: Aluminum
2>Bracket Material: stainless steel
3>Lens Material : PC
4>Beam Pattern: Spot/Flood/Combo

LW-51300-4D

LW-51240-4D

LW-51180-4D

LW-51120-4D



LW-5172-4D

LW-5136-4D

E9-10R-05.11342

Modle	Size	Size（mm）	LED Quantity	LED Ship	Power	Lumens	Beam pattern
LW-5136-4D	7.5"	210x82x88	12	3W Cree	36W	560LM	Flood/Spot/Combo
LW-5172-4D	13.5"	360x82x88	24	3W Cree	72W	1230LM	Flood/Spot/Combo
LW-51120-4D	21.5"	560x82x88	40	3W Cree	120W	2790LM	Flood/Spot/Combo
LW-51180-4D	31.5"	810x82x88	60	3W Cree	180W	3100LM	Flood/Spot/Combo
LW-51240-4D	41.5"	1060x82x88	80	3W Cree	240W	4200LM	Flood/Spot/Combo
LW-51300-4D	50"	1310x82x88	100	3W Cree	300W	5100LM	Flood/Spot/Combo

APPLICATION

Universal Light



Specification

1 > Voltage:DC9～32V
2 > Light Source: High Intensity SMD LED
3 > Housing Material:Aluminium Alloy
4 > Lens Material: PC
5 > Beam Pattern: Combo



Curved Type

Straight Type

LW-32120

LW-BC32300

LW-32180

LW-BC32240

LW-32240

LW-BC32180

LW-32300

LW-BC32120

Modle	Size	Size(mm)	LED Quantity	LED Type	Power	Lumens	Beam pattern
LW-32120	21.5"	560x82x88	90	1.5W ETI	120W	5700LM	Combo
LW-32180	31.5"	810x82x88	135	1.5W ETI	180W	7695LM	Combo
LW-32240	41.5"	1060x82x88	216	1.5W ETI	240W	10260LM	Combo
LW-32300	51.5"	1310x82x88	261	1.5W ETI	300W	12825LM	Combo
LW-BC32120	21.5"	560x82x88	90	1.5W ETI	120W	5700LM	Combo
LW-BC32180	31.5"	810x82x88	135	1.5W ETI	180W	7695LM	Combo
LW-BC32240	41.5"	1060x82x88	216	1.5W ETI	240W	10260LM	Combo
LW-BC32300	51.5"	1310x82x88	261	1.5W ETI	300W	12825LM	Combo

APPLICATION

LED Light bar

Universal Light

Super Thin Type

Specification

1 >Voltage:DC9~32V
2 >Light Source: 3W/LED
3 > Housing Material:Aluminium Alloy
4 >Lens Material: PC
5 >Beam Pattern: Combo
6 >3Functions(Mode A, Mode B, ModeC)
7 >Amber Light Used for Turn Light



Modle	Size	Size (mm)	LED Quantity	LED Ship	Power	Lumens	Beam pattern
LW-5618	7"	179x45x26	6	3W Cree	18W	610LM	Flood/Spot
LW-5636	13"	332x45x26	12	3W Cree	36W	1230LM	Flood/Spot
LW-5654	19"	485x45x26	18	3W Cree	54W	1760LM	Flood/Spot
LW-5672	25"	638x45x26	24	3W Cree	72W	2200LM	Flood/Spot
LW-5690	31"	791x45x26	30	3W Cree	90W	2675LM	Flood/Spot

Universal Light

Curved Type

Specification

1 >Voltage:DC9~32V
2 >Light Source: 3W/LED
3 > Housing Material:Aluminium Alloy
4 >Lens Material: PC
5 >Beam Pattern: Combo
6 >3Functions(Mode A, Mode B, ModeC)
7 >Amber Light Used for Turn Light



E9 E9-10R-05.11342

Modle	Size	Size (mm)	LED Quantity	LED Ship	Power	Lumens	Beam pattern
LW-BC51120	20"	633x76x90	40	3W EP	40W	3300LM	Flood/Spot/Combo
LW-BC51180	30"	725x76x90	60	3W EP	60W	5500LM	Flood/Spot/Combo
LW-BC51240	40"	886x76x90	80	3W EP	80W	9900LM	Flood/Spot/Combo
LW-BC51300	50"	1320x76x90	100	3W EP	100W	11300LM	Flood/Spot/Combo

APPLICATION

Universal Light

Specification

1 >Voltage:DC9~32V
2 >Light Source: High Intensity SMD LED
3 > Housing Material:Aluminium Alloy
4 >Lens Material: PC
5 >Beam Pattern: Combo
6 >3Functions(Mode A, Mode B, ModeC)
7 >Amber Light Used for Turn Light







New Type:LW-32F Series

4Function
1. Amber-Turning
2.White-Backup
3.Red-Brake & Driving

Amber & White Color Combined Type

RGB +White Color Type
RGB 16 mollion colors
Music mode

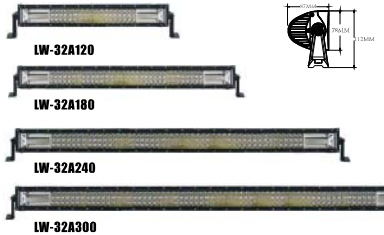

E9 E9-10R-05.11342

Modle	Size	Size (mm)	LED Quantity	LED Type	Power	Lumens	Beam pattern
LW-32A120	21.5"	560x82x88	90	1.5W ETI	120W	5700LM	Combo
LW-32A180	31.5"	810x82x88	135	1.5W ETI	180W	7695LM	Combo
LW-32A240	41.5"	1060x82x88	216	1.5W ETI	240W	10260LM	Combo
LW-32A300	51.5"	1310x82x88	261	1.5W ETI	300W	12825LM	Combo
LW-51120RGB-5D	21.5"	560x82x88	40+40	1.5W ETI	120W+8W	3100LM	Combo
LW-51180RGB-5D	31.5"	810x82x88	60+60	1.5W ETI	180W+12W	5675LM	Combo
LW-51240RGB-5D	41.5"	1060x82x88	80+80	1.5W ETI	240W+16W	7400LM	Combo
LW-51300RGB-5D	51.5"	1310x82x88	100+100	1.5W ETI	300W+20W	9200LM	Combo

APPLICATION

R9

Item No
R9

Input Power
15W

Operating Voltage
DC12V - 24V

Color Temperature
6000K

Light Source Model
SMD

IP Rate
IP67

Luminous Flux
L/1500LM,H/1500LM

Operating Life
>30000hrs

Operating Temperature: -40° C+80° C

Optional Models:

Hi/Lo:H4/9004/9007/H13
Single:H1/H3/H7/H8/H9/H11/H16/9005/9006/5202/880/881

- CREE breakthrough high brightness lighting source, with more stable,high temperature resistant and longer lifespan high quality product.

JM2

Item No
JM2

Input Power
25W

Operating Voltage
DC12V - 24V

Color Temperature
6500K

Light Source Model
Korean SMD

IP Rate
IP67

Luminous Flux
L/5000LM,H/5000LM

Operating Life
>30000hrs

Operating Temperature: -40° C+80° C

High Intensity Custom-Made LED Chips.
+300% Brightness

High Intensity Custom-Made LED Chips.
+360° Rotatable Socket

High Speed Fan
Fast Heat Dissipation

LH-2

Item No
LH-2

Input Power
20W

Operating Voltage
DC12V - 24V

Color Temperature
6500K

Light Source Model
ZES CHIP

IP Rate
IP67

Luminous Flux
L/5000LM,H/5000LM

Operating Life
>30000hrs

Operating Temperature: -40° C+80° C

Optional Models:

Hi/Lo:H4/9004/9007/H13
Single:H1/H3/H7/H8/H9/H11/H16/9005/9006/5202/880/881

JM4

Item No
JM4

Input Power
50W

Operating Voltage
DC12V - 24V

Color Temperature
6500K

Light Source Model
SMD

IP Rate
IP67

Luminous Flux
L/4500LM,H/4500LM

Operating Life
>30000hrs

Operating Temperature: -40° C+80° C

Optional Models:

Hi/Lo:H4/9004/9007/H13
Single:H1/H3/H7/H8/H9/H11/H16/9005/9006/5202/880/881

LED HEAD LIGHT

R7

Item No
R7

Input Power
27W

Operating Voltage
DC12V-36V

Color Temperature
6000K/4500K/3000K

Light Source Model
SMD

IP Rate
IP67

Luminous Flux
L/3500LM,H/3500LM

Operating Life
>30000hrs

Operating Temperature: -40° C+80° C

Optional Models:

Hi/Lo:H4/9004/9007/H13
Single:H1/H3/H7/H8/H9/H11/H16/9005/9006/5202/880/881

3 Colour Light

JM3

35W

Item No
JM3

Input Power
35W

Operating Voltage
DC12V - 24V

Color Temperature
6500K

Light Source Model
SMD

IP Rate
IP67

Luminous Flux
L/3400LM,H/3400LM

Operating Life
>30000hrs

Operating Temperature: -40° C+80° C

Optional Models:

Hi/Lo:H4/9004/9007/H13
Single:H1/H3/H7/H8/H9/H11/H16/9005/9006/5202/880/881

LH-9S

Item No
LH-9S

Input Power
H/33W,L/33W

Operating Voltage
DC12V-60V

Color Temperature
6500K

Light Source Model
SMD

IP Rate
IP65

Luminous Flux
L/3300LM,H/3300LM

Operating Life
>30000hrs

Operating Temperature: -40° C+80° C

Optional Models:

Hi/Lo:H4/9004/9007/H13
Single:H1/H3/H7/H8/H9/H11/H16/9005/9006/5202/880/881

R11

Item No
R11

Input Power
H/20W,L/20W

Operating Voltage
DC12V-36V

Color Temperature
6500K

Light Source Model
ZES CHIP

IP Rate
IP65

Luminous Flux
L/2000LM,H/2000LM

Operating Life
>30000hrs

Operating Temperature: -40° C+80° C

Optional Models:

Hi/Lo:H4/9004/9007/H13
Single:H1/H3/H7/H8/H9/H11/H16/9005/9006/5202/880/881

R10

Item No
R10

Input Power
H/18W,L/18W

Operating Voltage
DC12V-24V

Color Temperature
6500K

Light Source Model
CSP

IP Rate
IP65

Luminous Flux
L/1800LM,H/1800LM

Operating Life
>30000hrs

Operating Temperature: -40° C+80° C

Optional Models:

Hi/Lo:H4/9004/9007/H13
Single:H1/H3/H7/H8/H9/H11/H16/9005/9006/5202/880/881

LED HEAD LIGHT

JM5

Item No
JM5

Input Power
24W

Operating Voltage
DC12V-24V

Color Temperature
6000K/4500K/3000K

Light Source Model
SMD

IP Rate
IP67

Luminous Flux
L/3500LM,H/3500LM

Operating Life
>30000hrs

Operating Temperature: -40° C+80° C

Optional Models:

Hi/Lo:H4/9004/9007/H13
Single:H1/H3/H7/H8/H9/H11/H16/9005/9006/5202/880/881

High Brightness | Upgraded Technology | Reduce Power Consumption | Easy Installation

S1

Item No
S1

Input Power
13W

Operating Voltage
DC12V-24V

Color Temperature
6000K

Light Source Model
SMD

IP Rate
IP67

Luminous Flux
L/1400LM,H/1400LM

Operating Life
>30000hrs

Operating Temperature: -40° C+80° C

Optional Models:

Hi/Lo:H4/9004/9007/H13
Single:H1/H3/H7/H8/H9/H11/H16/9005/9006/5202/880/881

JM6

26W

Item No
JM6

Input Power
26W

Operating Voltage
DC12V - 24V

Color Temperature
6500K

Light Source Model
SMD

IP Rate
IP67

Luminous Flux
L/3400LM,H/3400LM

Operating Life
>30000hrs

Operating Temperature: -40° C+80° C

Optional Models:

Hi/Lo:H4/9004/9007/H13
Single:H1/H3/H7/H8/H9/H11/H16/9005/9006/5202/880/881

M1

Item No
M1

Input Power
24W

Operating Voltage
DC12V-24V

Color Temperature
6000K

Light Source Model
SMD

IP Rate
IP67

Luminous Flux
L/3500LM,H/3500LM

Operating Life
>30000hrs

Operating Temperature: -40° C+80° C

Optional Models:

Hi/Lo:H4/9004/9007/H13
Single:H1/H3/H7/H8/H9/H11/H16/9005/9006/5202/880/881

LED HEAD LIGHT

JM12

Item No
JM12

Input Power
24W

Operating Voltage
DC12V-24V

Color Temperature
6000K/4500K/3000K

Light Source Model
SMD

IP Rate
IP67

Luminous Flux
L/3500LM,H/3500LM

Operating Life
>30000hrs

Operating Temperature: -40° C+80° C

Optional Models:

Hi/Lo:H4/9004/9007/H13
Single:H1/H3/H7/H8/H9/H11/H16/9005/9006/5202/880/881

JM10

High Brightness · Upgraded Technology · Reduce Power Consumption · Easy Installation

Item No
JM10

Input Power
26W

Operating Voltage
DC12V-24V

Color Temperature
6000K

Light Source Model
SMD

IP Rate
IP67

Luminous Flux
L/1400LM,H/1400LM

Operating Life
>30000hrs

Operating Temperature: -40° C+80° C

Optional Models:

Hi/Lo:H4/9004/9007/H13
Single:H1/H3/H7/H8/H9/H11/H16/9005/9006/5202/880/881

JM7

Item No
JM7

Input Power
26W

Operating Voltage
DC12V - 24V

Color Temperature
6500K

Light Source Model
SMD

IP Rate
IP67

Luminous Flux
L/3400LM,H/3400LM

Operating Life
>30000hrs

Operating Temperature: -40° C+80° C

Optional Models:

Hi/Lo:H4/9004/9007/H13
Single:H1/H3/H7/H8/H9/H11/H16/9005/9006/5202/880/881

JM9

Item No
JM9

Input Power
26W

Operating Voltage
DC12V - 24V

Color Temperature
6500K

Light Source Model
SMD

IP Rate
IP67

Luminous Flux
L/3400LM,H/3400LM

Operating Life
>30000hrs

Operating Temperature: -40° C+80° C

Optional Models:

Hi/Lo:H4/9004/9007/H13
Single:H1/H3/H7/H8/H9/H11/H16/9005/9006/5202/880/881

LED HEAD LIGHT