




SERIES PRODUCTS

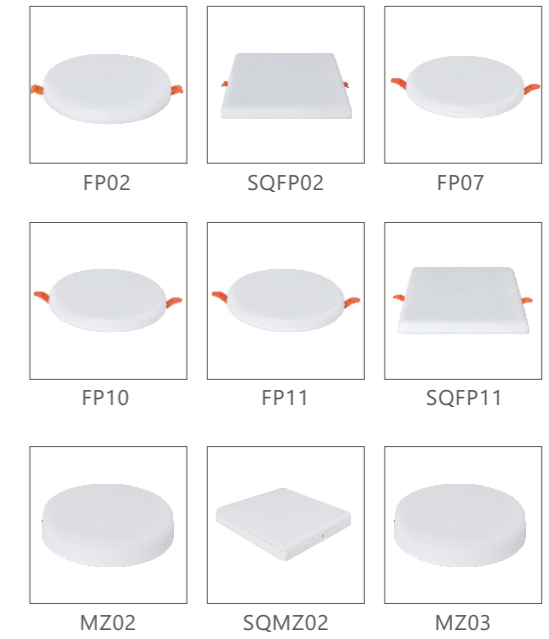

FRAMELESS PANEL LIGHT

Frameless panel light system

Led Frameless Panel Light system is an affordable solid state lighting solution with reliable qualities With its trendy design and good light performance

Installation: recessed and surface mounted , easy to install and to adjust Light source: full spectrumSMD LED ,improve color

Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium

Ental protection and no pollution

Optic: Unique optical design,highly efficient with uniform distribution

Control gear: Isolation constant current driver with EMC EMS and OLP SCP/OVP protecti P protection: IP20

Applications:Commercial space 、 House 、 Office 、 sohoal





FP02


SQFP02

TECHNICAL SPECIFICATIONS


Product Name :	Frameless panel light
Model no:	FP02/SQFP02
Power :	9W/10W/16W/24W/36W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	LED SMD2835
Lumen :	90-110 LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	110°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Iron
Diffuser :	PP
Lighning protection :	1.5-4KV
Protection class :	Ip20

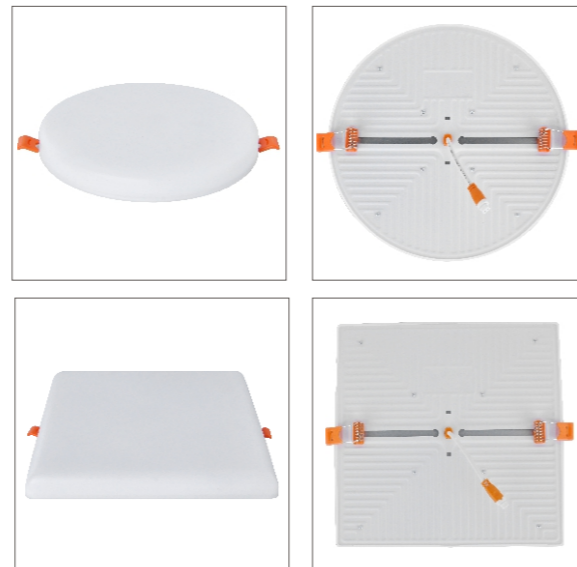


3000K




h(m)	E(lx)	D(m)
1	190	2.11
2	48	4.21
3	21	6.32
4	12	8.43
5	8	10.54

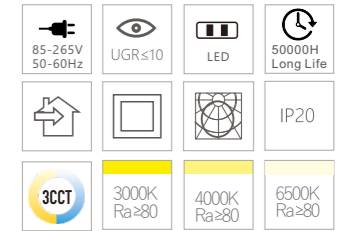


MODEL :
FP02-9W




MODEL :
FP02-10W

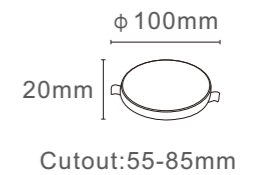


MODEL :
FP02-16W

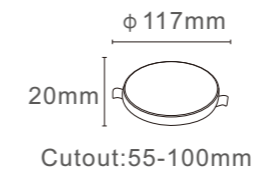


MODEL :
FP02-24W

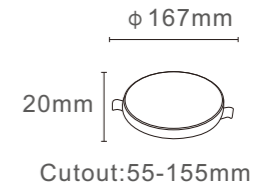


MODEL :
FP02-36W

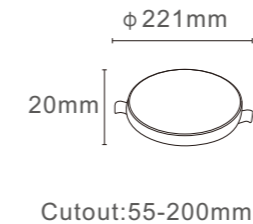


MODEL :
SQFP02-9W




MODEL :
SQFP02-10W




MODEL :
SQFP02-16W



MODEL :
SQFP02-24W




MODEL :
SQFP02-36W






FP07 SERIES




110°
10W

3000K




h(m)	E(lx)	D(m)
1	392	2.18
2	98	4.36
3	44	6.54
4	25	8.72
5	16	10.90




FP07

TECHNICAL SPECIFICATIONS


Product Name :	Frameless panel light
Model no:	FP07
Power :	10W/18W/24W/36W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	LED SMD2835
Lumen :	90-110 LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	110°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Die casting Aluminium
Diffuser :	PP
Lighning protection :	1.5-4KV
Protection class :	Ip20

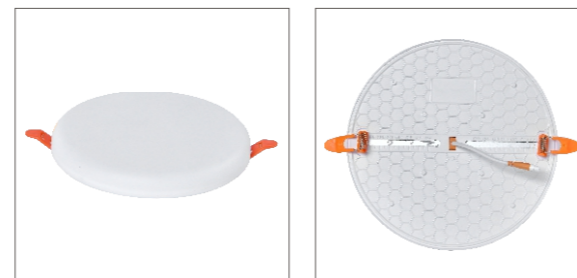


MODEL :
FP07-10W




MODEL :
FP07-18W



MODEL :
FP07-24W




MODEL :
FP07-36W






FP10 SERIES




110°
10W

3000K




h(m)	E(lx)	D(m)
1	392	2.18
2	98	4.36
3	44	6.54
4	25	8.72
5	16	10.90




FP10

TECHNICAL SPECIFICATIONS


Product Name :	Frameless panel light
Model no:	FP10
Power :	10W/18W/24W/36W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	LED SMD2835
Lumen :	90-110 LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	110°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Die casting Aluminium
Diffuser :	PP
Lighning protection :	1.5-4KV
Protection class :	Ip20

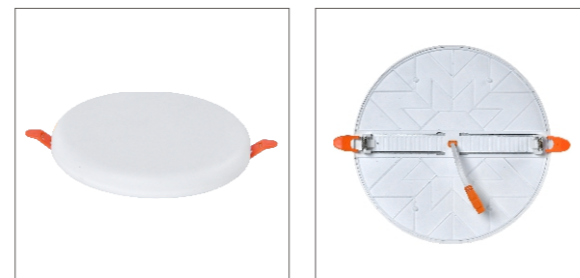


MODEL :
FP10-10W




MODEL :
FP010-18W



MODEL :
FP10-24W




MODEL :
FP10-36W






FP11 SERIES




110°
10W







3000K



h(m)	E(lx)	D(m)
1	392	2.18
2	98	4.36
3	44	6.54
4	25	8.72
5	16	10.90




FP11 **SQFP11**

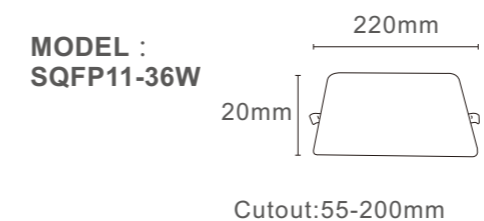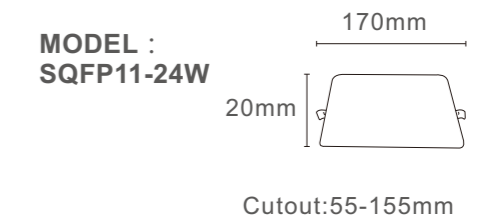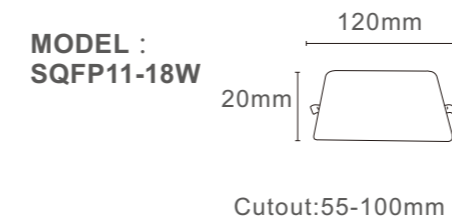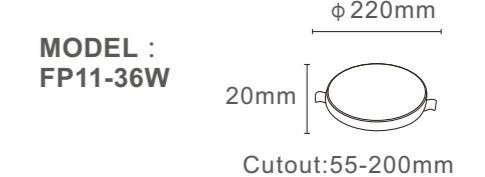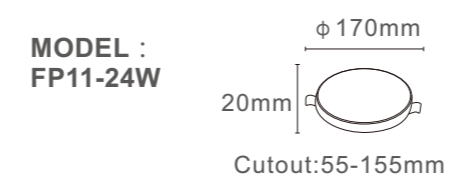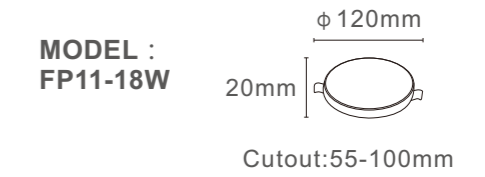



TECHNICAL SPECIFICATIONS

Product Name :	Frameless panel light
Model no:	FP11/SQFP11
Power :	10W/18W/24W/36W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	LED SMD2835
Lumen :	90-110 LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	110°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Die casting Aluminium
Diffuser :	PP
Lighning protection :	1.5-4KV
Protection class :	Ip20

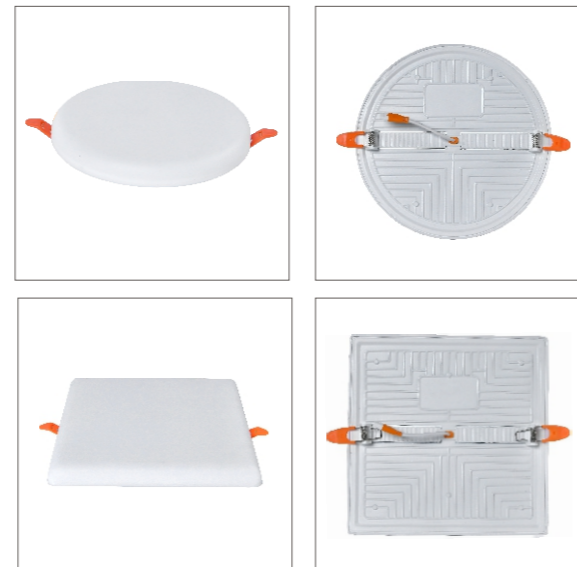




XK SERIES

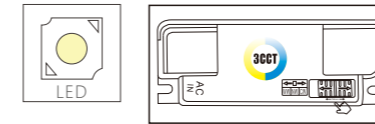






h(m)	E(lx)	D(m)
1	392	2.18
2	98	4.36
3	44	6.54
4	25	8.72
5	16	10.90

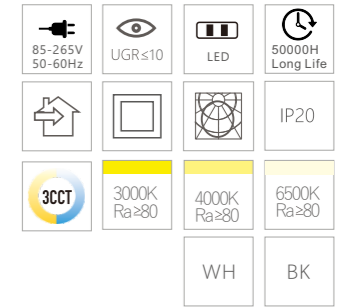

XK


TECHNICAL SPECIFICATIONS

Product Name :	Frameless panel light
Model no:	XK
Power :	10W/18W/24W/36W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	LED SMD2835
Lumen :	90-110 LM/W
Colour Temperture :	3000K - 6500K/CCT
Colour Rendering Index :	CRI>80
Beam angle :	110°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Die casting Aluminium
Diffuser :	ABS+PC
Lighning protection :	1.5-4KV
Protection class :	Ip20

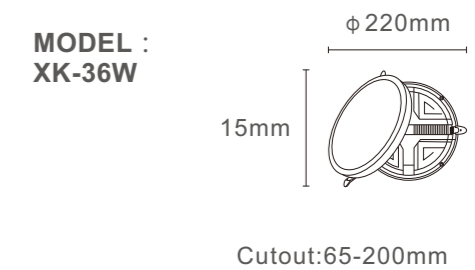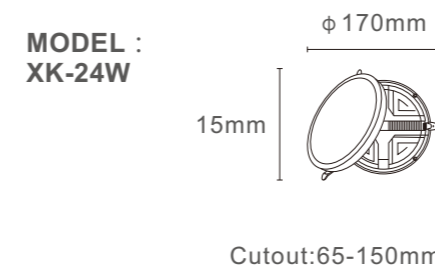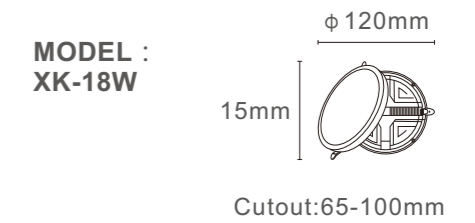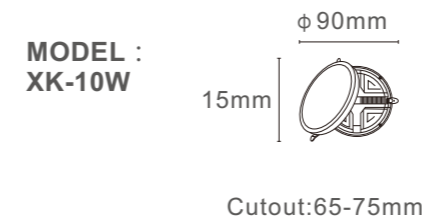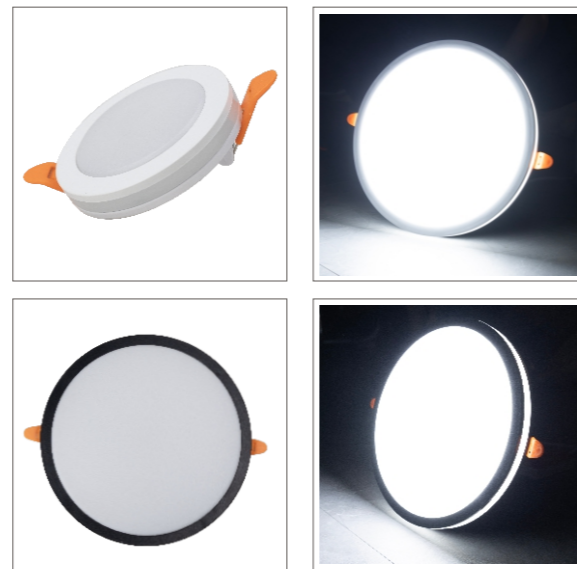




MZ02 SQMZ02 SERIES




110°
18W

3000K










h(m)	E(lx)	D(m)
1	392	2.18
2	98	4.36
3	44	6.54
4	25	8.72
5	16	10.90



MZ02

SQMZ02

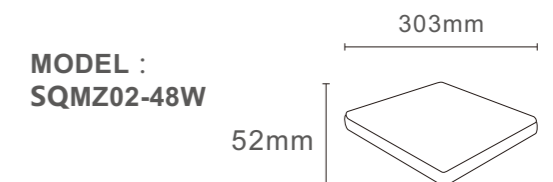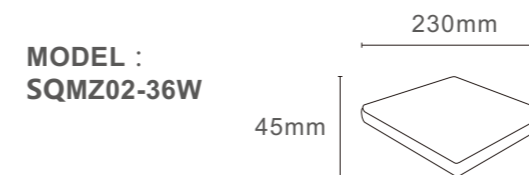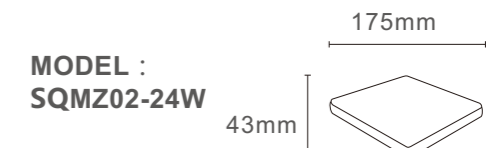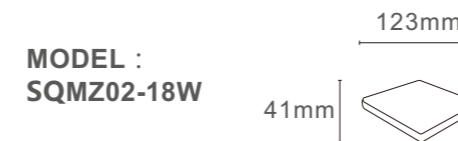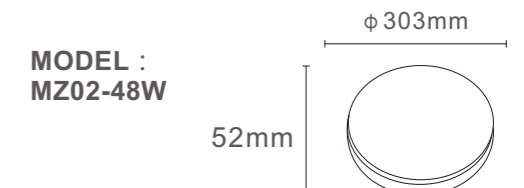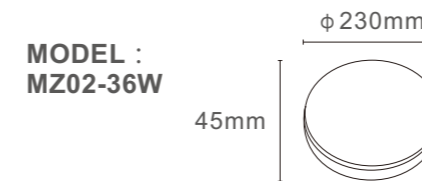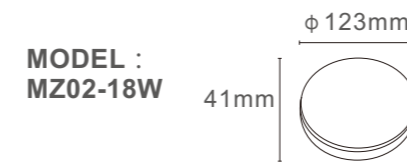


TECHNICAL SPECIFICATIONS

Product Name :	Frameless panel light
Model no:	MZ02/SQMZ02
Power :	18W/24W/36W/48W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	LED SMD2835
Lumen :	90-110 LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	110°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Iron
Diffuser :	PP
Lighning protection :	1.5-4KV
Protection class :	Ip20






MZ03 SQMZ03 SERIES




110°
18W

3000K











h(m)	E(lx)	D(m)
1	392	2.18
2	98	4.36
3	44	6.54
4	25	8.72
5	16	10.90



MZ03

SQMZ03

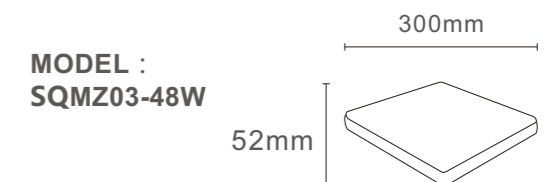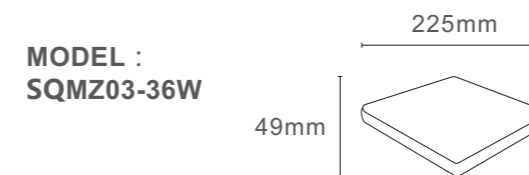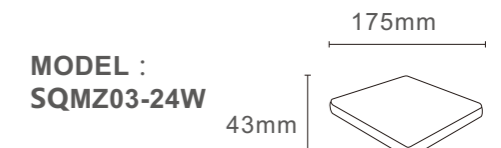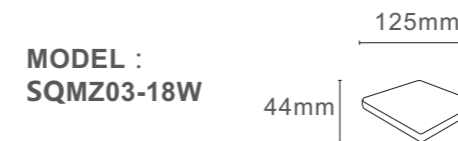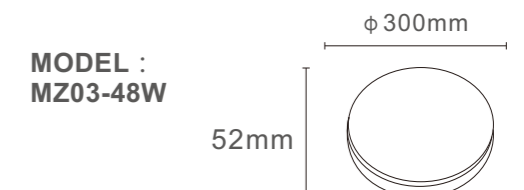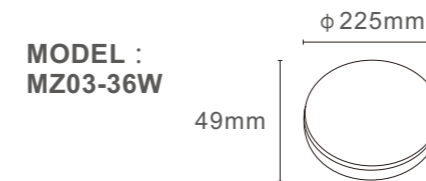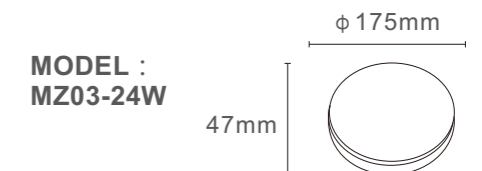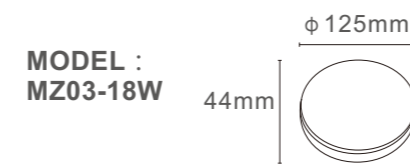


TECHNICAL SPECIFICATIONS

Product Name :	Frameless panel light
Model no:	MZ03/SQMZ03
Power :	18W/24W/36W/48W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	LED SMD2835
Lumen :	90-110 LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	110°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Die casting Aluminium
Diffuser :	PP
Lighning protection :	1.5-4KV
Protection class :	Ip20





SERIES PRODUCTS

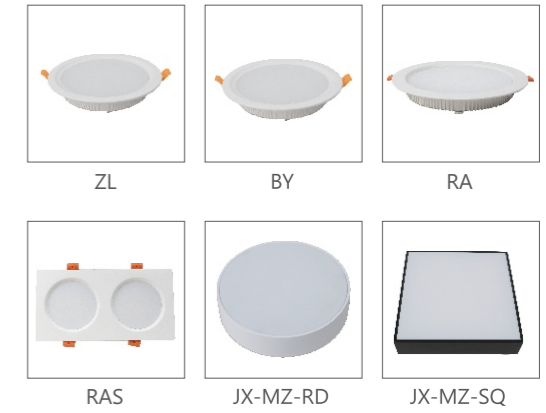

SMD DOWN LIGHT

SMD Down Light System

SMD Down Light system is an affordable solid state lighting solution with reliable qualities With its trendy design and good light performance

Installation: recessed and surface mounted , easy to install and to adjust Light source: full spectrumSMD LED ,improve color


Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium

Ental protection and no pollution


Optic: Unique optical design,highly efficient with uniform distribution

Control gear: Isolation constant current driver with EMC EMS and OLP SCP/OVP protecti P protection: IP20


Applications:Commercial space 、 House 、 Office 、 sohoal

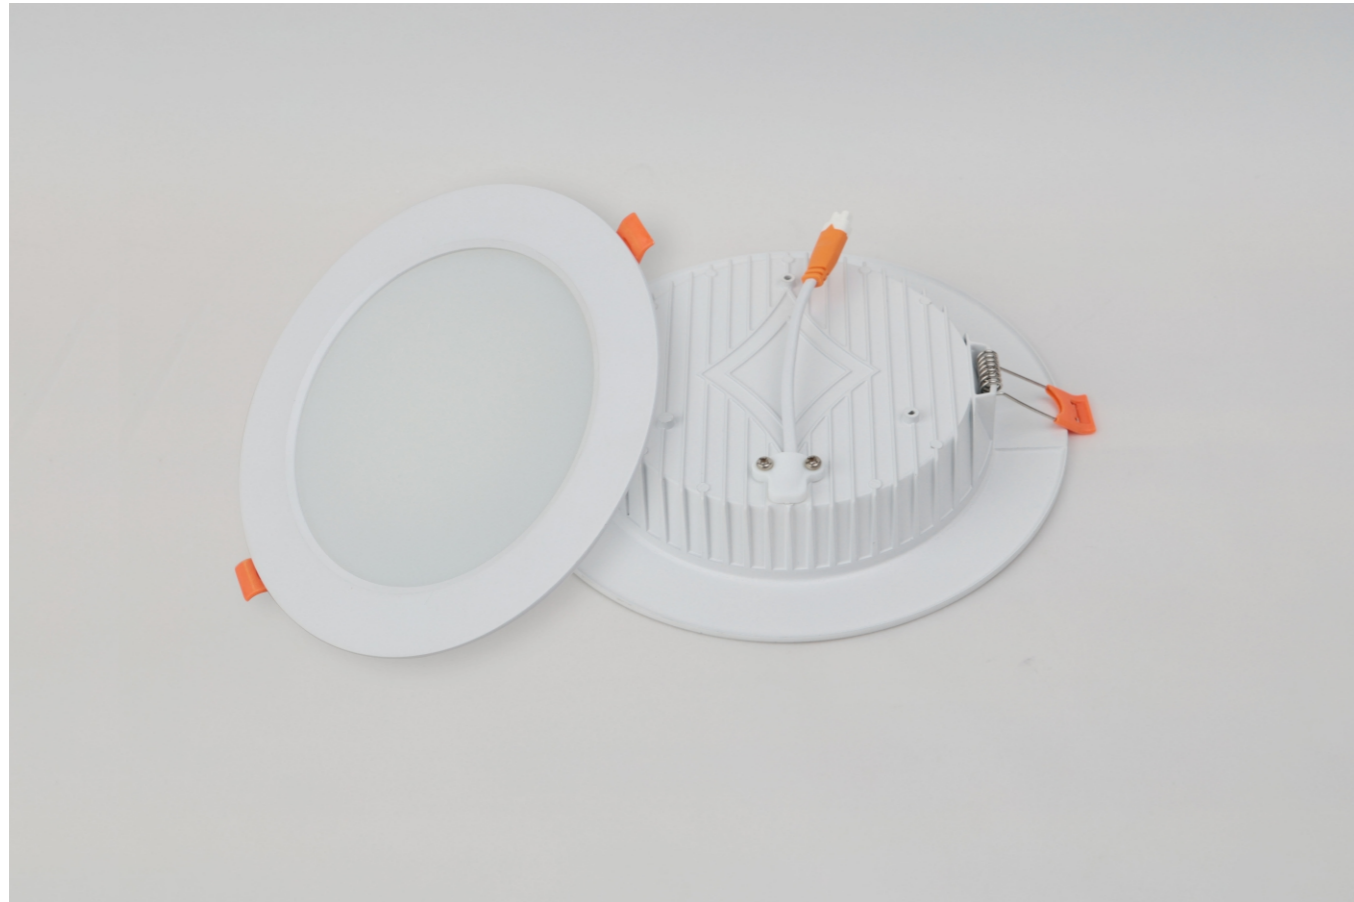


ZL SERIES



3000K




h(m)	E(lx)	D(m)
1	392	2.18
2	98	4.36
3	44	6.54
4	25	8.72
5	16	10.90

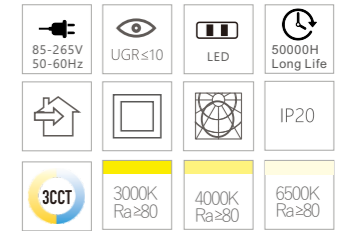


ZL

TECHNICAL SPECIFICATIONS


Product Name :	SMD Downlight
Model no:	ZL
Power :	7W/12W/18W/24W/32W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	LED SMD2835
Lumen :	90-110 LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	110°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Die casting Aluminium
Diffuser :	PS & PC
Lighning protection :	1.5-4KV
Protection class :	Ip20

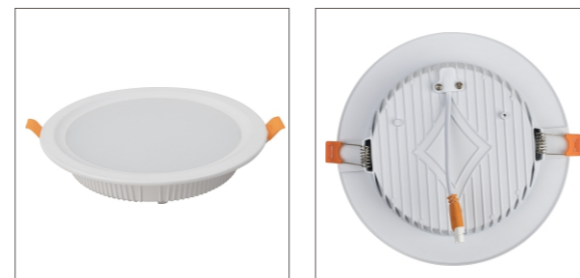


MODEL :
ZL-7W




MODEL :
ZL-12W




MODEL :
ZL-18W



MODEL :
ZL-24W



MODEL :
ZL-32W






BY

TECHNICAL SPECIFICATIONS


Product Name :	SMD Downlight
Model no:	BY
Power :	7W/12W/15W/20W/30W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	LED SMD2835
Lumen :	90-110 LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	110°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Die casting Aluminium
Diffuser :	PS & PC
Lighning protection :	1.5-4KV
Protection class :	Ip20




BY SERIES




110°




12W




h(m)	E(lx)	D(m)
1	392	2.18
2	98	4.36
3	44	6.54
4	25	8.72
5	16	10.90




MODEL :
BY-7W




MODEL :
BY-12W




MODEL :
BY-15W



MODEL :
BY-20W



MODEL :
BY-30W






RA

TECHNICAL SPECIFICATIONS

Product Name :	SMD Downlight
Model no:	RA
Power :	10W/16W/20W/24W/36W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	LED SMD2835
Lumen :	90-110 LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	110°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Die casting Aluminium
Diffuser :	PC
Lighning protection :	1.5-4KV
Protection class :	Ip20




RA SERIES




110°
10W


3000K




h(m)	E(lx)	D(m)
1	392	2.18
2	98	4.36
3	44	6.54
4	25	8.72
5	16	10.90




MODEL :
RA-10W




MODEL :
RA-16W




MODEL :
RA-20W



MODEL :
RA-24W




MODEL :
RA-36W






RAF SERIES

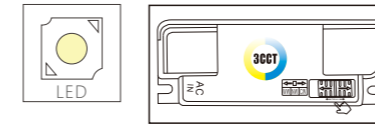

85-265V 50-60Hz	UGR<10	LED	50000H Long Life
3000K	3000K Ra>80	4000K Ra>80	6500K Ra>80
	WH	BK	

110°
10W









h(m)	E(lx)	D(m)
1	392	2.18
2	98	4.36
3	44	6.54
4	25	8.72
5	16	10.90

RAF


TECHNICAL SPECIFICATIONS

Product Name :	SMD Downlight
Model no:	RAF
Power :	5W/10W/15W/18W/20W/24W/36W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	LED SMD2835
Lumen :	90-110 LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	110°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Die casting Aluminium
Diffuser :	PC
Lighning protection :	1.5-4KV
Protection class :	Ip20

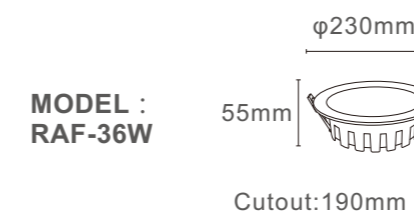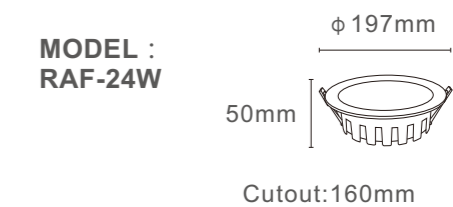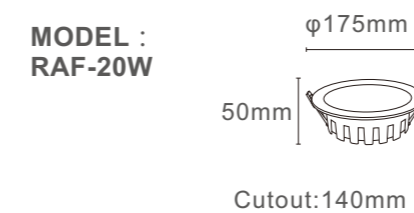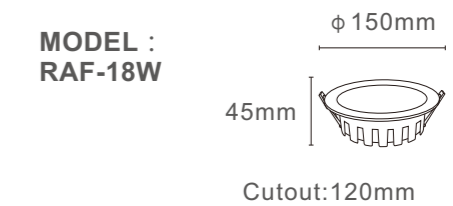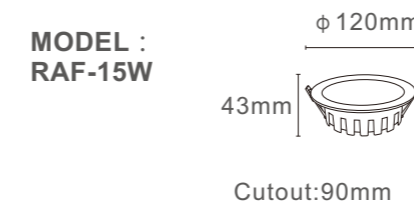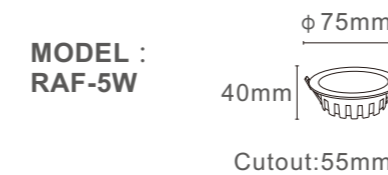




RAS SERIES




110°




12W

3000K



h(m)	E(lx)	D(m)
1	392	2.18
2	98	4.36
3	44	6.54
4	25	8.72
5	16	10.90




RAS

TECHNICAL SPECIFICATIONS

Product Name :	SMD Downlight
Model no:	RAS
Power :	7W*2/12W*2/18W*2/24W*2
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	LED SMD2835
Lumen :	90-110 LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	110°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Die casting Aluminium
Diffuser :	PC
Lighning protection :	1.5-4KV
Protection class :	Ip20




MODEL :
RAS-7W*2

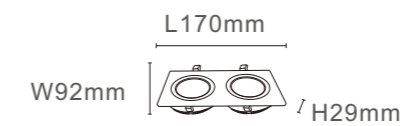


Cutout:L160mm*W75mm

MODEL :
RAS-12W*2

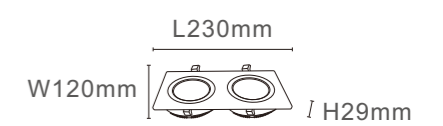


Cutout:L120mm*W95mm

MODEL :
RAS-18W*2

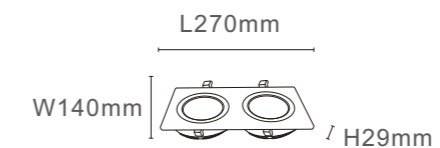

Cutout:L250mm*W120mm


MODEL :
RAS-24W*2

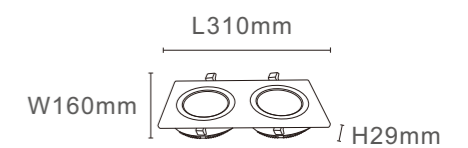

Cutout:L290mm*W140mm




JX-MZ-RD JX-MZ-SQ SERIES



110°
16W

3000K











h(m)	E(lx)	D(m)
1	392	2.18
2	98	4.36
3	44	6.54
4	25	8.72
5	16	10.90

85-265V 50-60Hz	UGR<10	LED	50000H Long Life
IP20	3000K Ra>80	4000K Ra>80	6500K Ra>80

JX-MZ-RD


JX-MZ-SQ

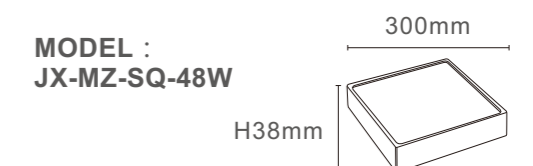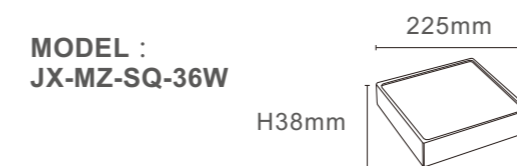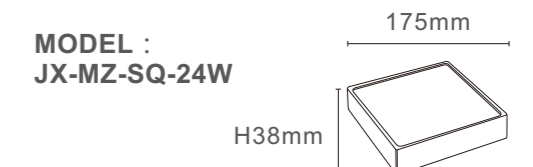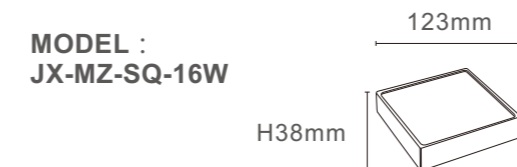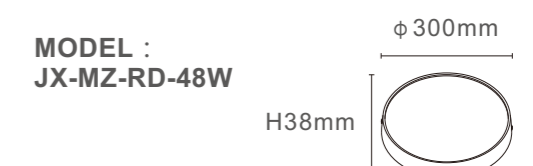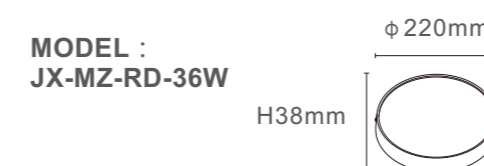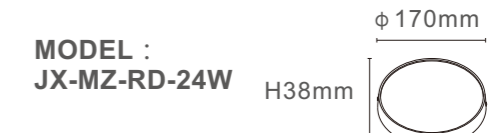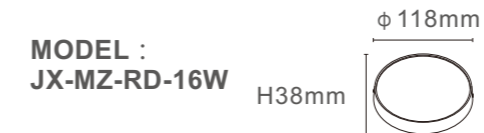


TECHNICAL SPECIFICATIONS

Product Name :	SMD Downlight
Model no:	JX-MZ-RD/JX-MZ-SQ
Power :	16W/24W/36W/48W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	LED SMD2835
Lumen :	80LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	110°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Die casting Aluminium
Diffuser :	PC
Lighning protection :	1.5-4KV
Protection class :	Ip20



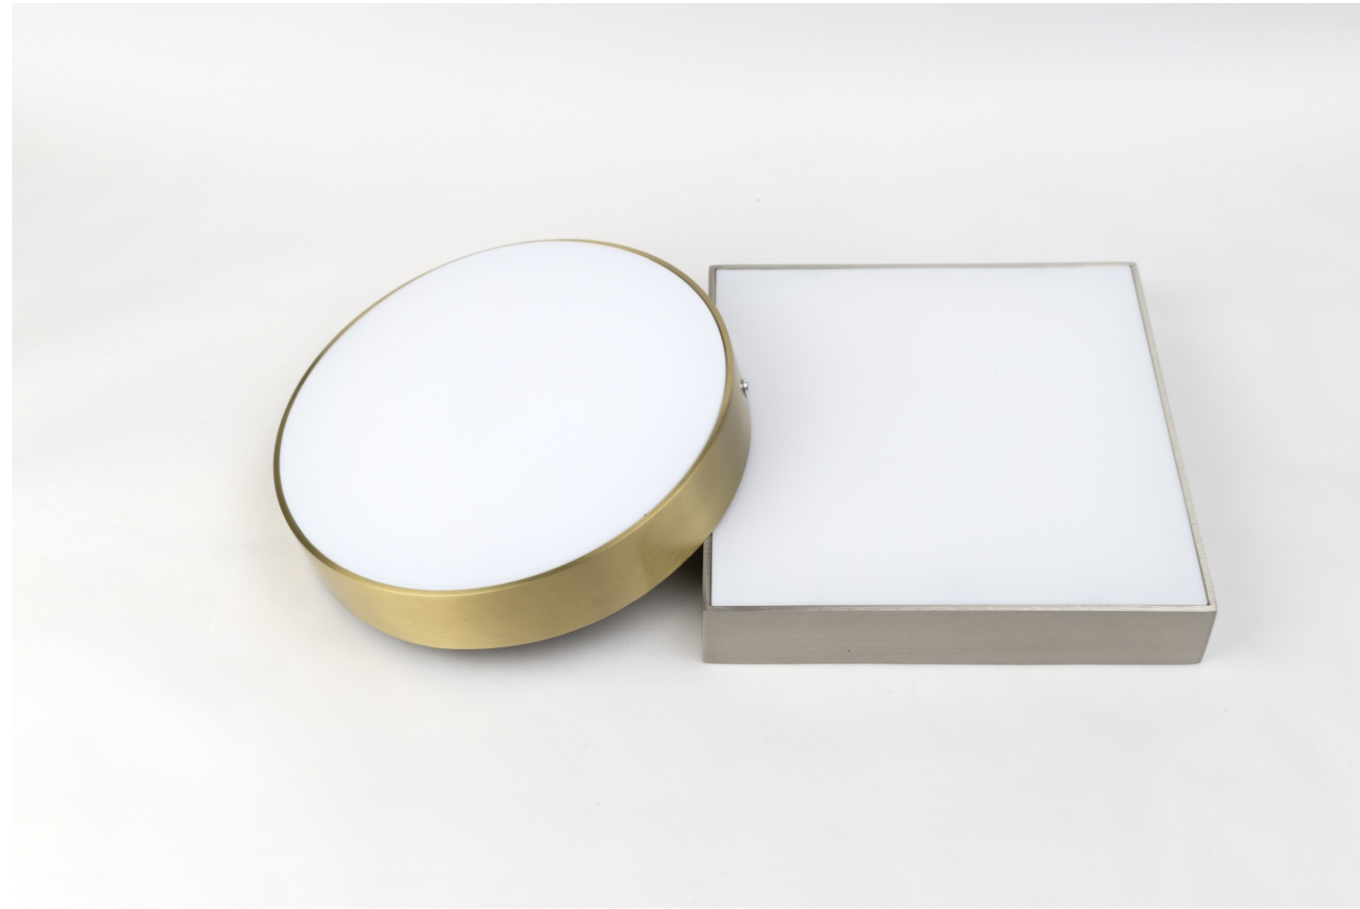


JX-MZ-RD JX-MZ-SQ SERIES




110°
12W

3000K











h(m)	E(lx)	D(m)
1	392	2.18
2	98	4.36
3	44	6.54
4	25	8.72
5	16	10.90




JX-MZ-RD

JX-MZ-SQ

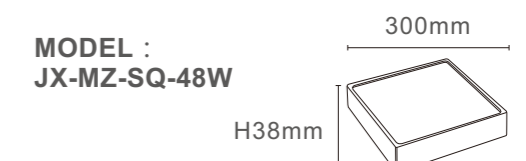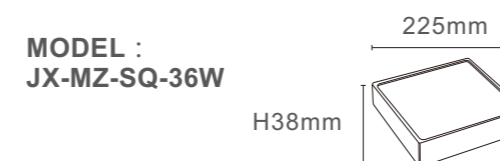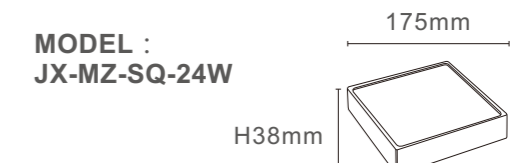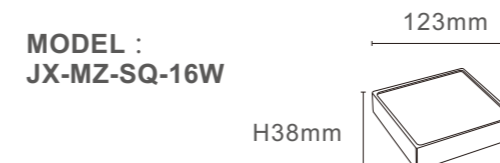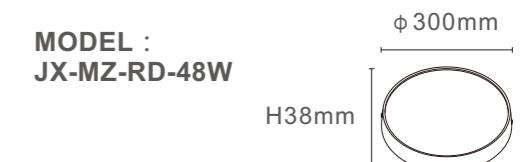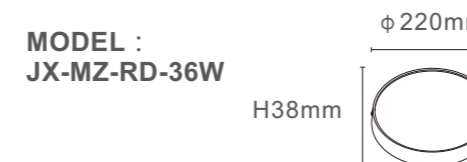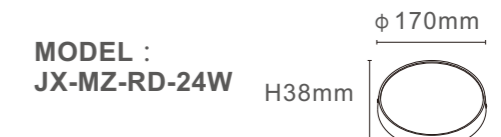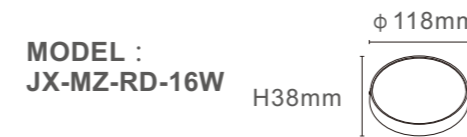


TECHNICAL SPECIFICATIONS

Product Name :	SMD Downlight
Model no:	JX-MZ-RD/JX-MZ-SQ
Power :	16W/24W/36W/48W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	LED SMD2835
Lumen :	80LM/W
Colour Temperature :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	110°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Die casting Aluminium
Diffuser :	PC
Lighning protection :	1.5-4KV
Protection class :	Ip20

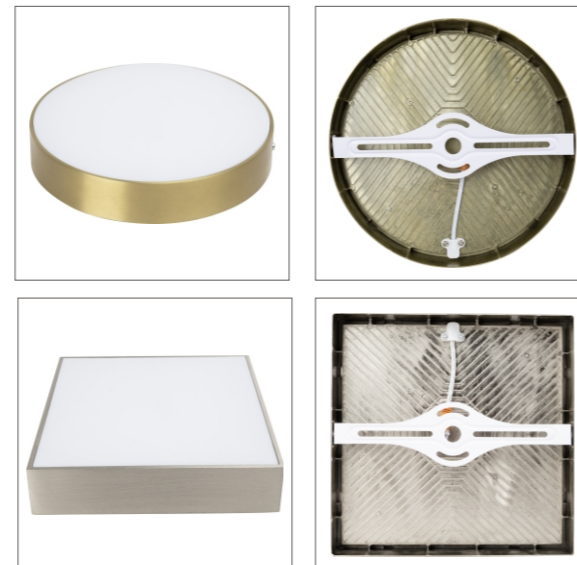



SERIES PRODUCTS

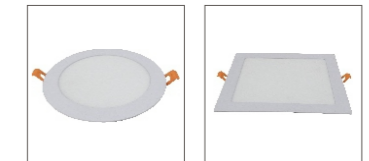

RD-YL06/09

SQ-YL06/09



MZRD

MZSQ

SLIM PANEL LIGHT

Slim Panel Light System

Slim Panel Light system is an affordable solid state lighting solution with reliable qualities With its trendy design and good light performance

Installation: recessed and surface mounted , easy to install and to adjust Light source: full spectrumSMD LED ,improve color


Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium

Ental protection and no pollution

Optic: Unique optical design,highly efficient with uniform distribution

Control gear: Isolation constant current driver with EMC EMS and OLP SCP/OVP protecti P protection: IP20

Applications:Commercial space 、 House 、 Office 、 sohol

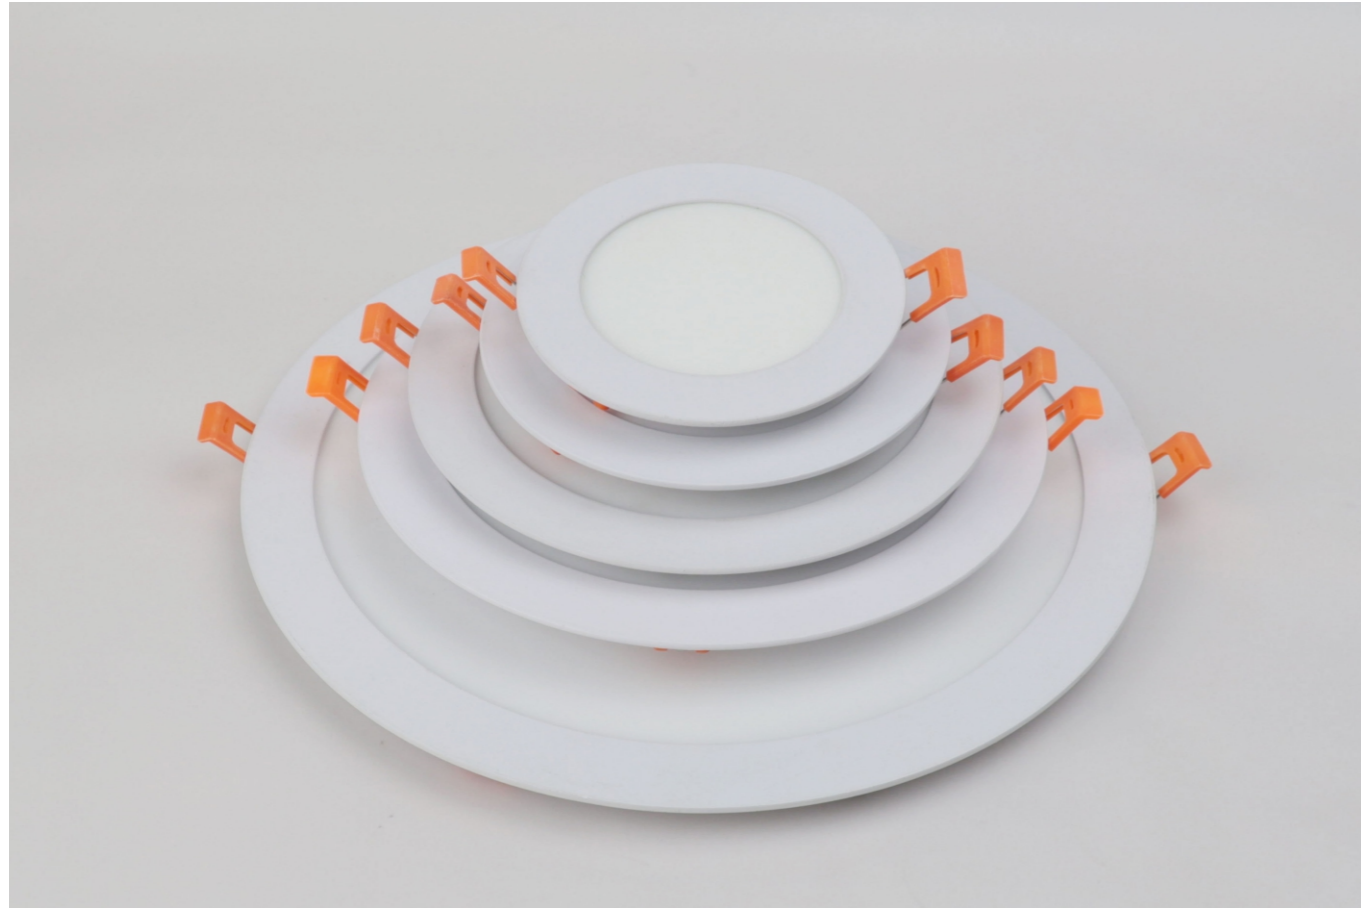

RD-YL06


RD-YL09

TECHNICAL SPECIFICATIONS

Product Name :	Slim Panel Light
Model no:	RD-YL06/YL09
Power :	3W/6W/9W/12W/15W/18W/24W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	LED SMD2835
Lumen :	80LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	110°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Die casting Aluminium
Diffuser :	PP+glass & PS+PS
Lighning protection :	1.5-4KV
Protection class :	Ip20




YL06/YL09 SERIES




110°
12W


3000K




h(m)	E(lx)	D(m)
1	392	2.18
2	98	4.36
3	44	6.54
4	25	8.72
5	16	10.90




MODEL : RD-3W




MODEL : RD-6W




MODEL : RD-9W




MODEL : RD-12W




MODEL : RD-15W




MODEL : RD-18W



MODEL : RD-24W



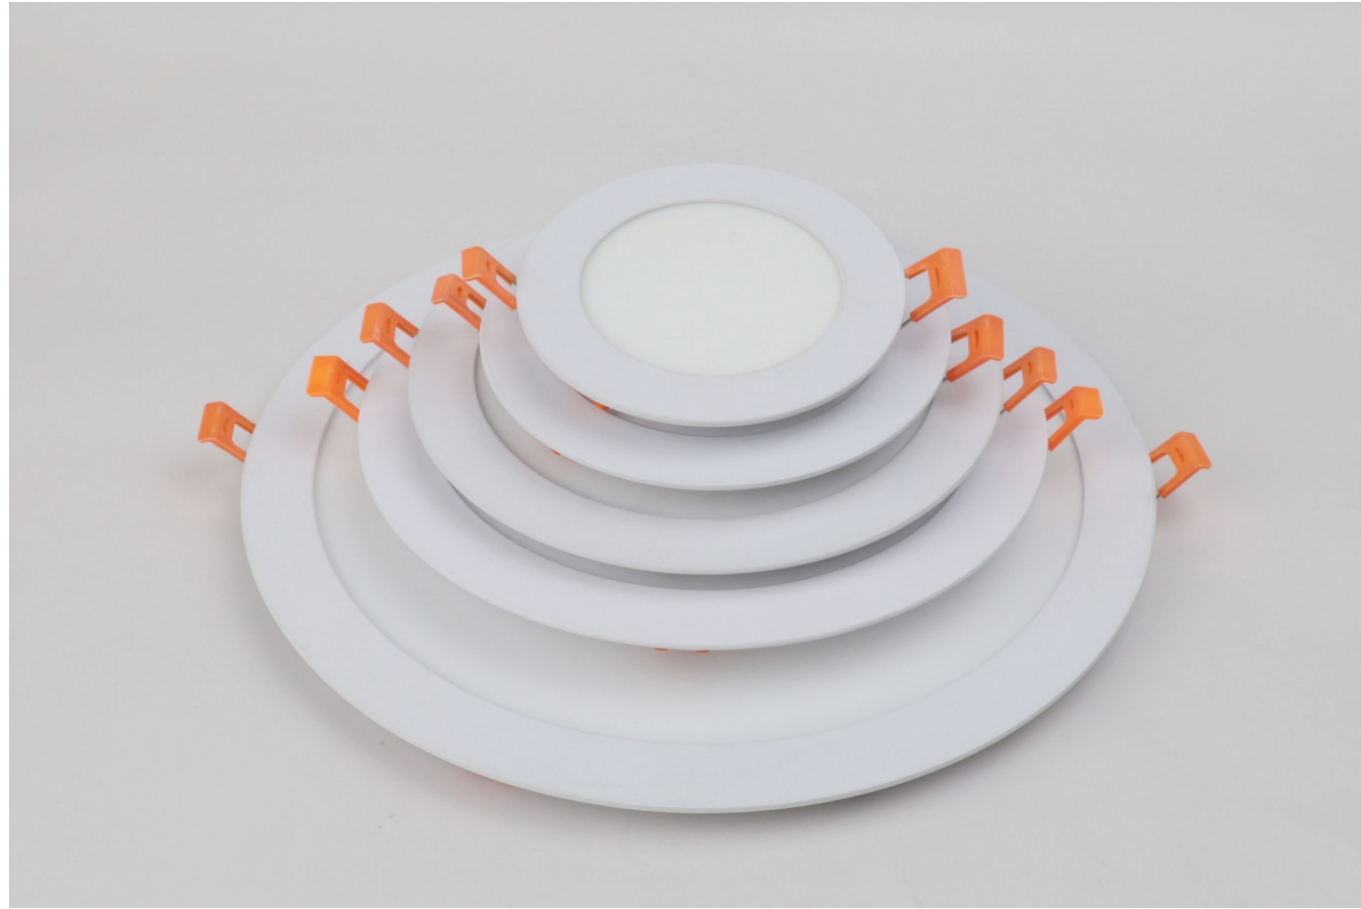


SQ-YL06


SQ-YL09

TECHNICAL SPECIFICATIONS

Product Name :	Slim Panel Light
Model no:	SQ-YL06/YL09
Power :	3W/6W/9W/12W/15W/18W/24W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	LED SMD2835
Lumen :	80LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	110°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Die casting Aluminium
Diffuser :	PP+glass & PS+PS
Lighning protection :	1.5-4KV
Protection class :	Ip20

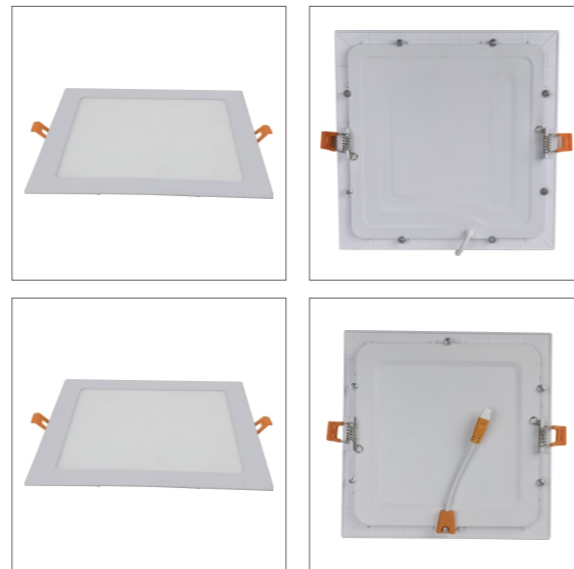


YL06/YL09 SERIES




110°
12W


3000K




h(m)	E(lx)	D(m)
1	392	2.18
2	98	4.36
3	44	6.54
4	25	8.72
5	16	10.90




MODEL :
SQ-3W




MODEL :
SQ-6W




MODEL :
SQ-9W




MODEL :
SQ-12W




MODEL :
SQ-15W



MODEL :
SQ-18W



MODEL :
SQ-24W





MZRD


MZSQ

TECHNICAL SPECIFICATIONS

Product Name :	Slim Panel Light
Model no:	MZRD/MZSQ
Power :	6W/12W/18W/24W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	LED SMD2835
Lumen :	80LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	110°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Die casting Aluminium
Diffuser :	PP+glass & PS+PS
Lighning protection :	1.5-4KV
Protection class :	Ip20




MZRD MZSQ SERIES




110°
12W

3000K



h(m)	E(lx)	D(m)
1	392	2.18
2	98	4.36
3	44	6.54
4	25	8.72
5	16	10.90



MODEL :
MZRD-6W

H28mm
H32mm
H35mm

φ 119mm

MODEL :
MZRD-12W

H28mm
H32mm
H35mm

φ 170mm

MODEL :
MZRD-18W

H28mm
H32mm
H35mm

φ 222mm

MODEL :
MZRD-24W

H28mm
H32mm
H35mm

φ 300mm

MODEL :
MZSQ-6W

H28mm
H32mm
H35mm

119mm

MODEL :
MZSQ-12W

H28mm
H32mm
H35mm

167mm

MODEL :
MZSQ-6W

H28mm
H32mm
H35mm


222mm

MODEL :
MZSQ-12W

H28mm
H32mm
H35mm

300mm

SERIES PRODUCTS

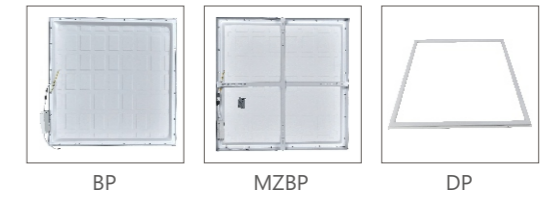

BP

MZBP

DP

LED RECTANGLE PANEL LIGHT

LED Rectangle Panel Light system

Led Rectangle Panel Light system is an affordable solid state lighting solution with reliable qualities With its trendy design and good light performance

Installation: recessed and surface mounted , easy to install and to adjust Light source: full spectrumSMD LED ,improve color


Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium

Ental protection and no pollution

Optic: Unique optical design,highly efficient with uniform distribution

Control gear: Isolation constant current driver with EMC EMS and OLP SCP/OVP protecti P protection: IP20

Applications:Commercial space , House , Office , sohoal

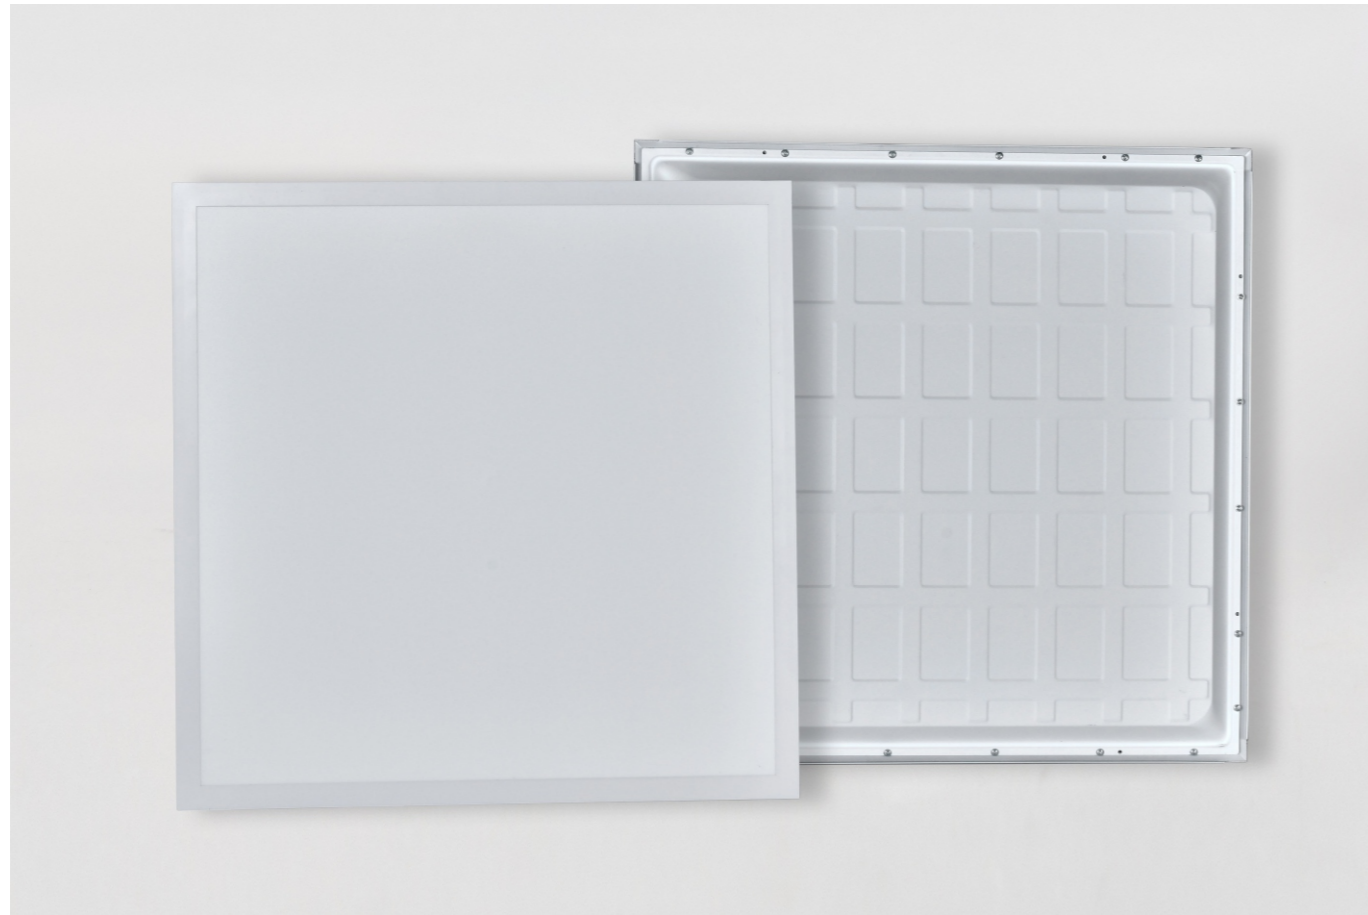


BP

TECHNICAL SPECIFICATIONS

Product Name :	LED Rectangle Panel Light
Model no:	BP
Power :	18W/40W/48W/54W/72W/36W/50W
	100W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	LED SMD2835
Lumen :	90-110 LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	110°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Aluminium Alloy
Diffuser :	PS
Lighning protection :	1.5-4KV
Protection class :	Ip20



BP SERIES





110°




54W


4000K




MODEL :
BP-18W

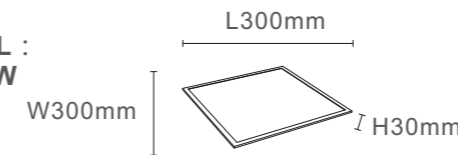


MODEL :
BP-40W
BP-48W
BP-54W
BP-72W

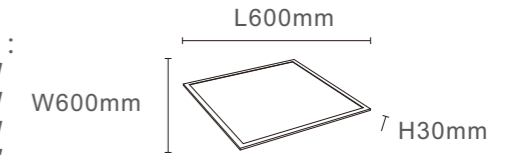


MODEL :
BP-36W

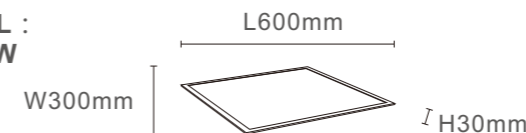


MODEL :
BP-60W

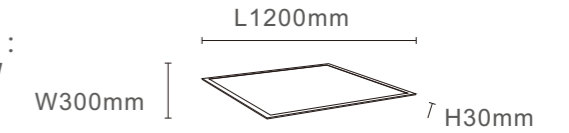

MODEL :
BP-100W

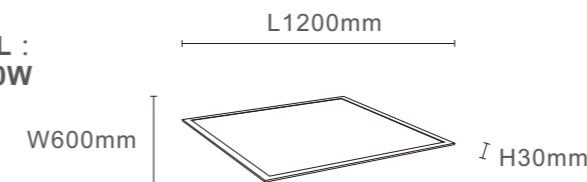

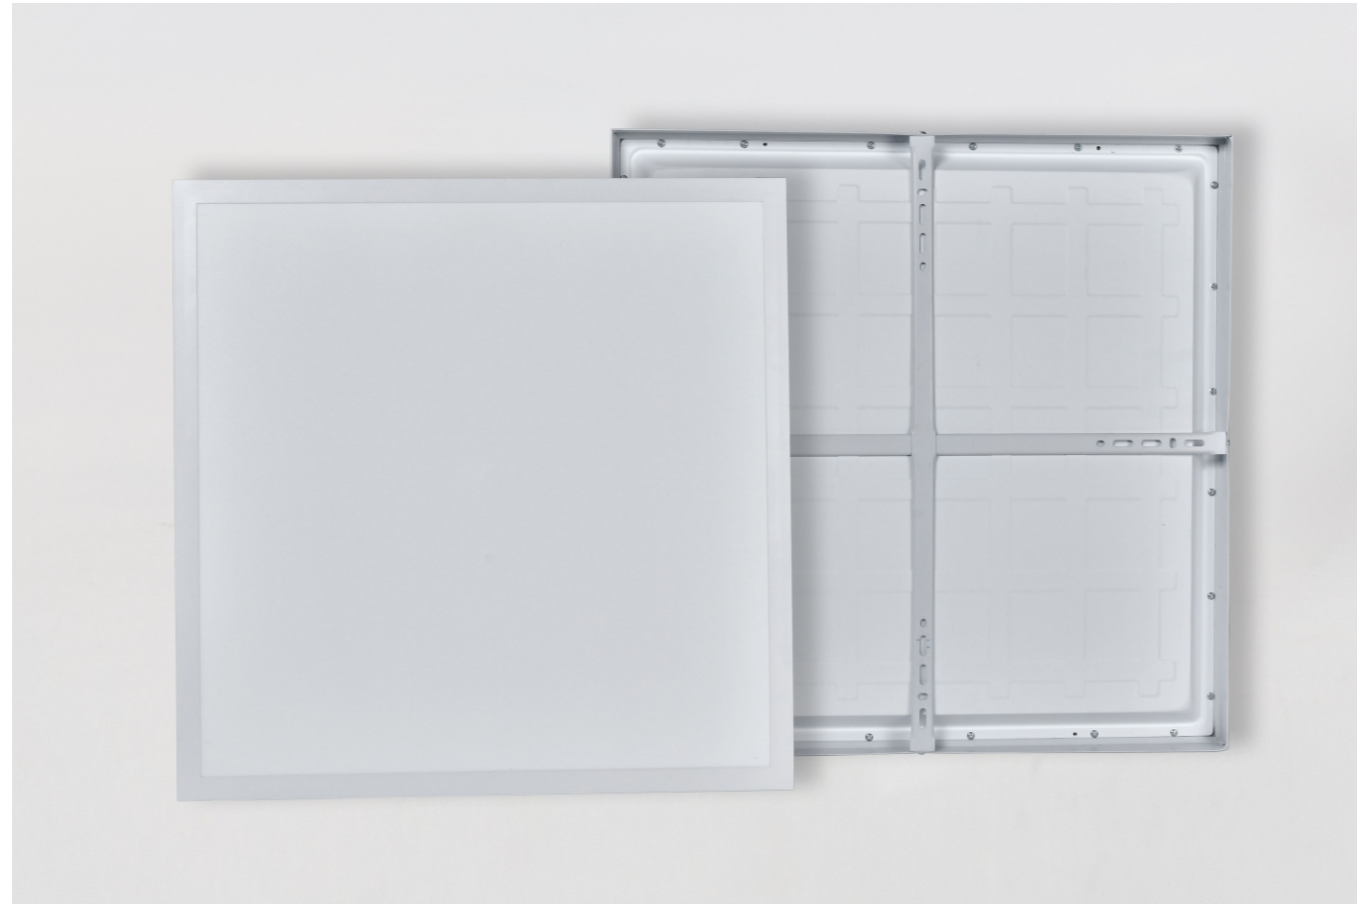


MZBP

TECHNICAL SPECIFICATIONS

Product Name :	LED Rectangle Panel Light
Model no:	MZBP
Power :	18W/40W/48W/54W/72W/36W/50W
	100W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	LED SMD2835
Lumen :	90-110 LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	110°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Aluminium Alloy
Diffuser :	PS
Lighning protection :	1.5-4KV
Protection class :	Ip20



MZBP SERIES





110°




54W


4000K




MODEL :
MZBP-18W

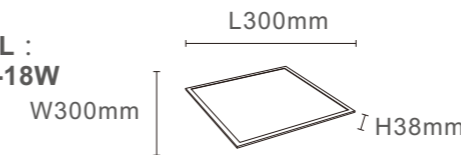


MODEL :
MZBP-40W
MZBP-48W
MZBP-54W
MZBP-72W

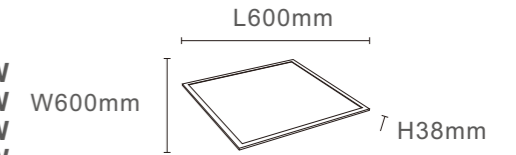


MODEL :
MZBP-36W

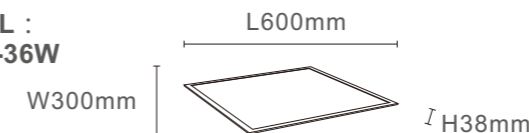

MODEL :
MZBP-60W

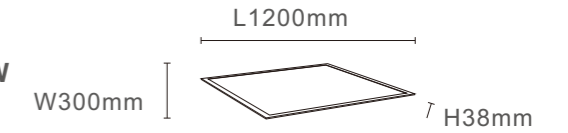

MODEL :
MZBP-100W

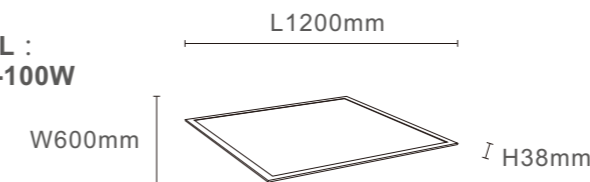




DP



DP SERIES




110°




48W

4000K




85-265V 50-60Hz	UGR<10	LED	50000H Long Life
IP20	3000K Ra>80	4000K Ra>80	6500K Ra>80

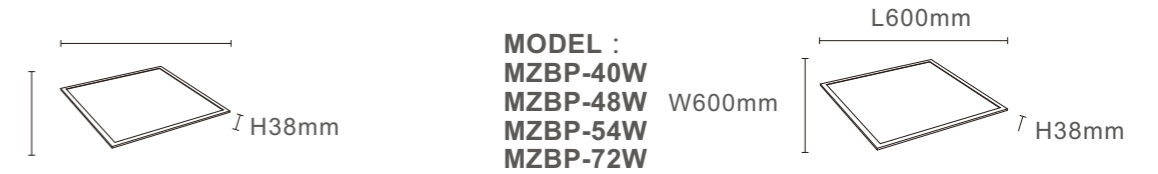

TECHNICAL SPECIFICATIONS

Product Name :	LED Rectangle Panel Light
Model no:	DP
Power :	18W/48W+48W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	LED SMD2835
Lumen :	90-110 LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	110°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Aluminium Alloy
Diffuser :	PC
Lighning protection :	1.5-4KV
Protection class :	Ip20

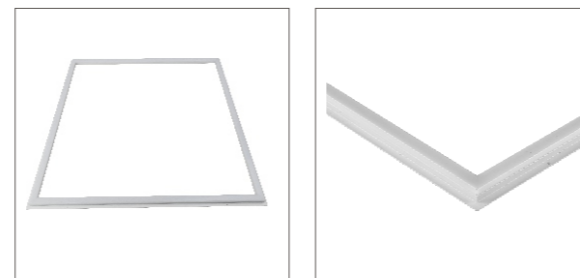

MODEL :
DP-48W*2

