



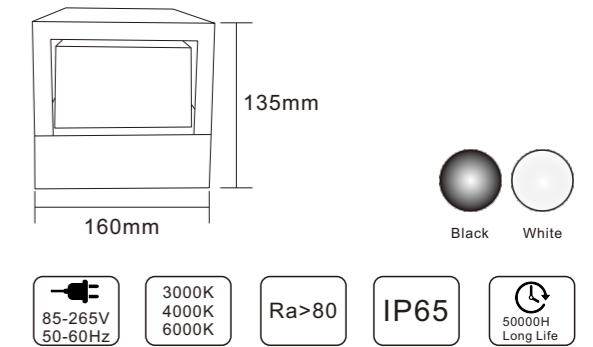

XG-920

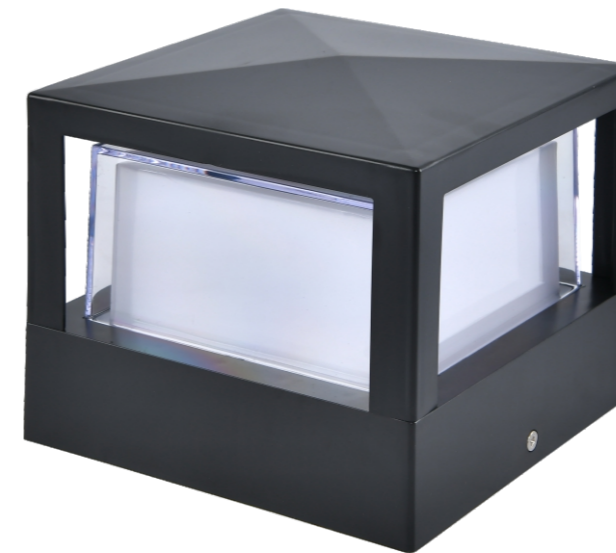


Item No	Power	Size	Input	Lumen	Material
XG-920	12W	160*H135mm	AC 85-265V 50-60Hz	100LM/W	ABS+PS

TECHNICAL SPECIFICATIONS

Product Name :	LED Garden Light
Model no:	XG-920 / 930 / 940 / 950 / 960
Power :	12W
Color :	White / Black
Input :	AC85-265V , 50 / 60 HZ
Temperature range :	-20-50°C
Light source :	SMD2835
Lumen :	100 LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	120°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Plastic ABS
Cover material :	PS diffuser
Lighning protection :	1.5-4KV
Sealing material :	Gule
Protection class :	Ip65




XG-930

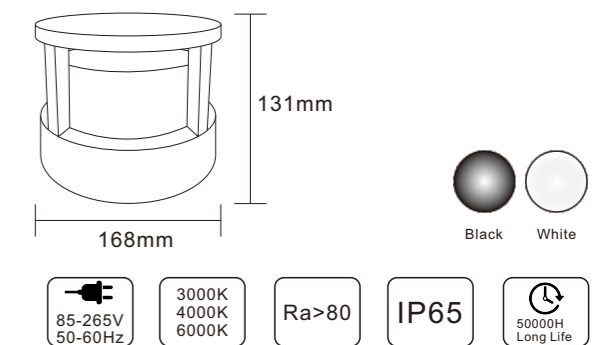


Item No	Power	Size	Input	Lumen	Material
XG-930	12W	∅ 168*H131mm	AC 85-265V 50-60Hz	100LM/W	ABS+PS

XG-940

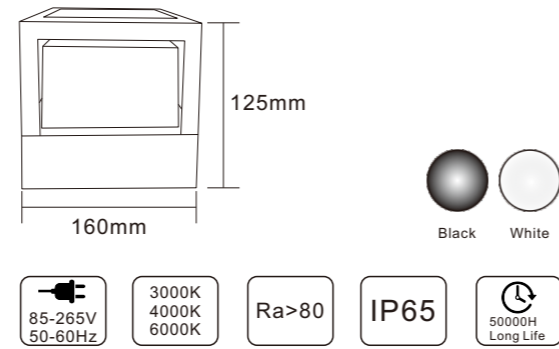


Item No	Power	Size	Input	Lumen	Material
XG-940	12W	160*H125mm	AC 85-265V 50-60Hz	100LM/W	ABS+PS

XG-950

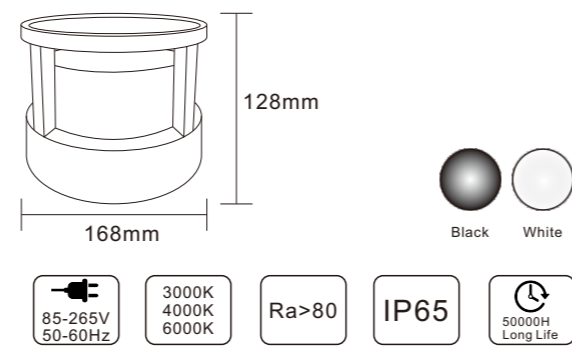



Item No	Power	Size	Input	Lumen	Material
XG-950	12W	∅168*H128mm	AC 85-265V 50-60Hz	100LM/W	ABS+PS

XG-960

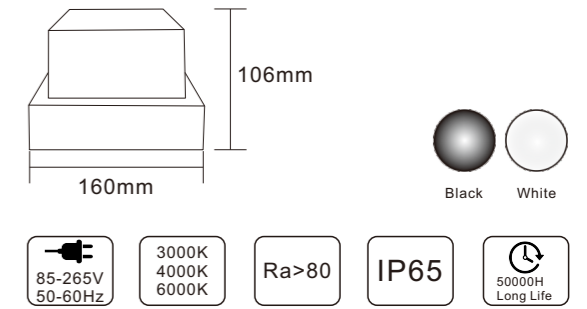

Item No	Power	Size	Input	Lumen	Material
XG-960	12W	160*H106mm	AC 85-265V 50-60Hz	100LM/W	ABS+PS

XG-970

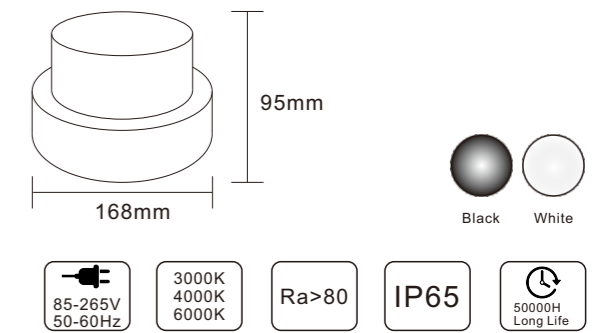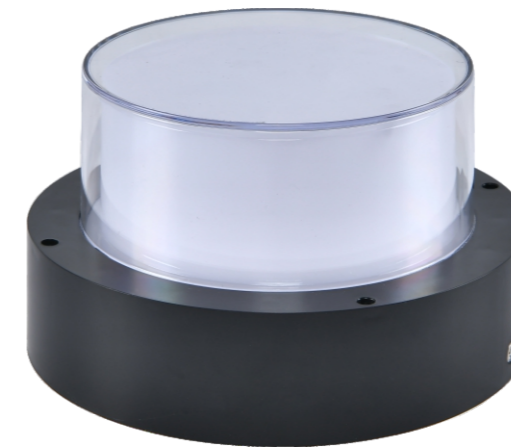

Item No	Power	Size	Input	Lumen	Material
XG-970	12W	∅168*H95mm	AC 85-265V 50-60Hz	100LM/W	ABS+PS




TECHNICAL SPECIFICATIONS

Product Name :	Moisture-proof lamps
Model no:	XG-901/902/903/904
Power :	24W/20W/15W
Color :	White / Black
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	SMD2835
Lumen :	100 LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	120°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Plastic ABS
Cover material :	PS diffuser
Lighning protection :	1.5-4KV
Sealing material :	Gule
Protection class :	Ip65




XG-901

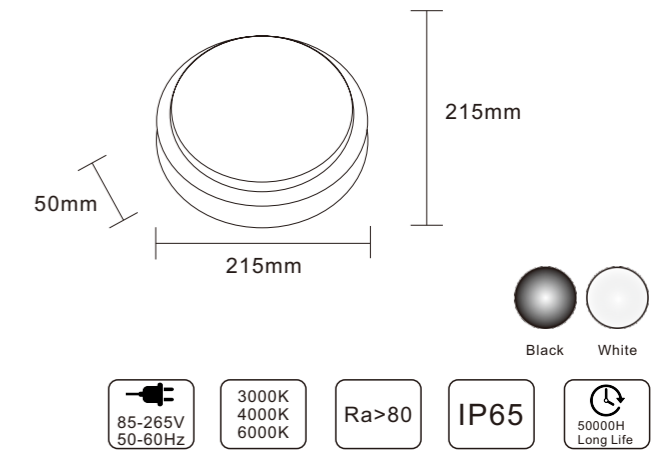


Item No	Power	Size	Input	Lumen	Material
XG-901	24W	Ø 215*H50mm	AC 85-265V 50-60Hz	100LM/W	ABS+PS
XG-902	15W	Ø 170*H50mm			

XG-903

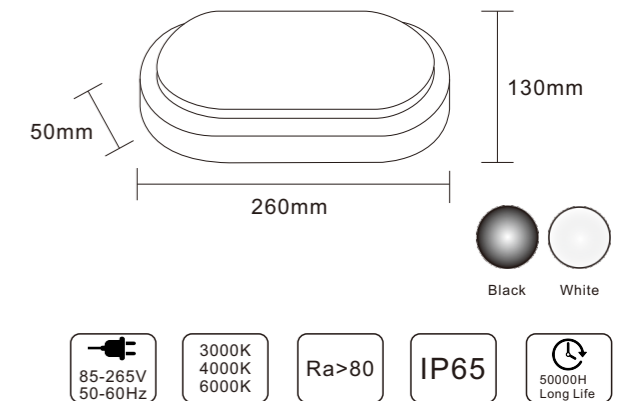

Item No	Power	Size	Input	Lumen	Material
XG-903	24W	L260*W130*H50mm	AC 85-265V 50-60Hz	100LM/W	ABS+PS
	20W				
XG-904	15W	L220*W110*H50mm			

XG-801

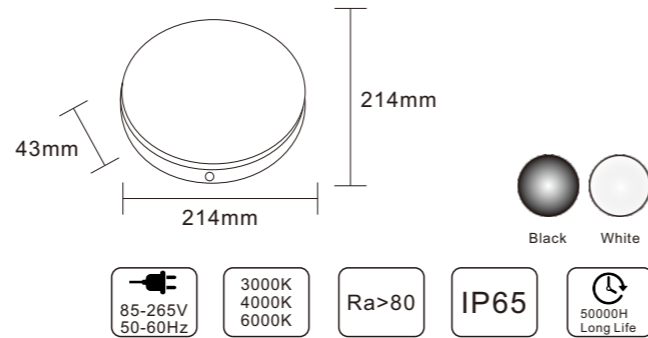


Item No	Power	Size	Input	Lumen	Material
XG-801	24W	∅ 214*H43mm	AC 85-265V 50-60Hz	100LM/W	PP+PP
XG-803	16W	∅ 170*H43mm			

TECHNICAL SPECIFICATIONS

Product Name :	Moisture-proof lamps
Model no:	XG-801/802/SN801/SN803
Power :	24W/20W/16W
Color :	White / Black
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	SMD2835
Lumen :	100 LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	120°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	PP
Cover material :	PP
Lighning protection :	1.5-4KV
Sealing material :	Gule
Protection class :	Ip65




XG-802

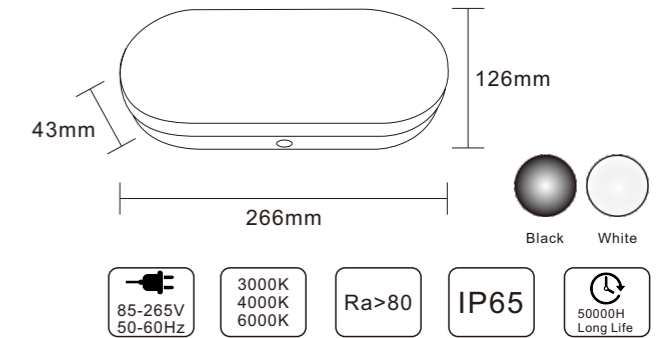

Item No	Power	Size	Input	Lumen	Material
XG-802	24W	L266*W126*H43mm	AC 85-265V 50-60Hz	100LM/W	PP+PP


XG-SN801

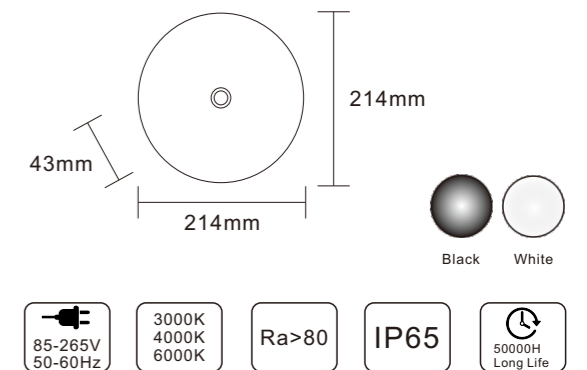

Item No	Power	Size	Input	Lumen	Material
XG-SN801	20W	∅ 214*H43mm	AC 85-265V 50-60Hz	100LM/W	PP+PP
XG-SN803	16W	∅ 170*H43mm			



XG-701

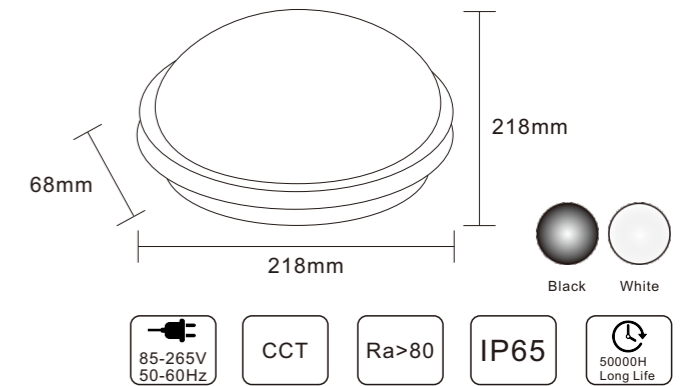


Item No	Power	Size	Input	Lumen	Material
XG-701	24W+24W	Ø 218*H68mm	AC 85-265V 50-60Hz	100LM/W	PP+PS

TECHNICAL SPECIFICATIONS

Product Name :	Moisture-proof lamps
Model no:	XG-701/702
Power :	24W+24W
Color :	White / Black
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	SMD2835
Lumen :	100 LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	120°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	PP
Cover material :	PS
Lighning protection :	1.5-4KV
Sealing material :	Gule
Protection class :	Ip65


XG-702

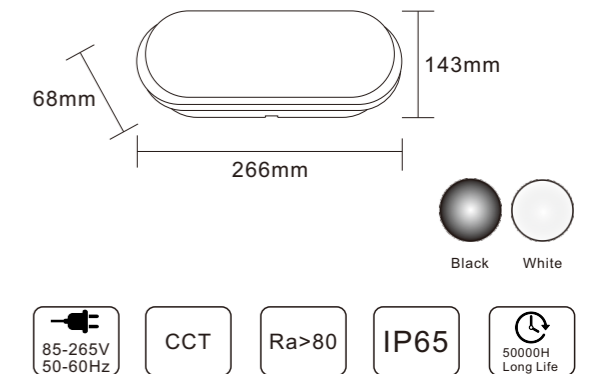

Item No	Power	Size	Input	Lumen	Material
XG-702	24W+24W	L266*W143*H68mm	AC 85-265V 50-60Hz	100LM/W	PP+PS



XG-601

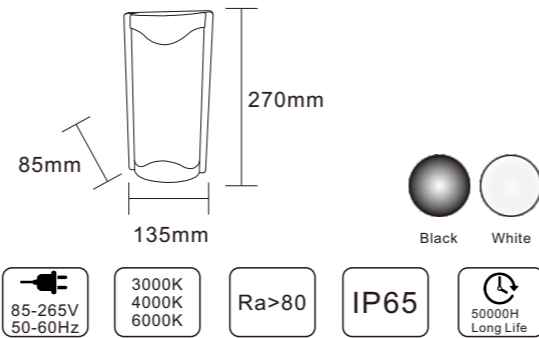

Item No	Power	Size	Input	Lumen	Material
XG-601	24W	L270*W135*H85mm	AC 85-265V 50-60Hz	100LM/W	PP+PP

XG-602




Item No	Power	Size	Input	Lumen	Material
XG-602	24W	L270*W135*H85mm	AC 85-265V 50-60Hz	100LM/W	PP+PP

TECHNICAL SPECIFICATIONS

Product Name :	Moisture-proof lamps
Model no:	XG-601/602/603/604/605/606/607
Power :	24W
Color :	White / Black
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	SMD2835
Lumen :	100 LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	120°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	PP
Cover material :	PP
Lighning protection :	1.5-4KV
Sealing material :	Gule
Protection class :	Ip65





XG-603

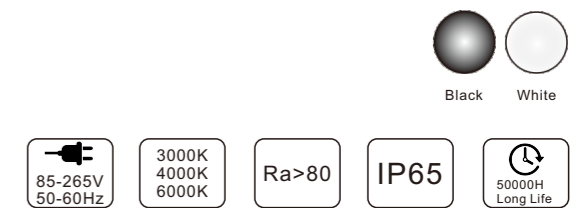



Item No	Power	Size	Input	Lumen	Material
XG-603	24W	L270*W135*H85mm	AC 85-265V 50-60Hz	100LM/W	PP+PP

XG-604






Item No	Power	Size	Input	Lumen	Material
XG-604	24W	L270*W135*H85mm	AC 85-265V 50-60Hz	100LM/W	PP+PP

XG-606





Item No	Power	Size	Input	Lumen	Material
XG-606	24W	L270*W135*H85mm	AC 85-265V 50-60Hz	100LM/W	PP+PP

XG-605

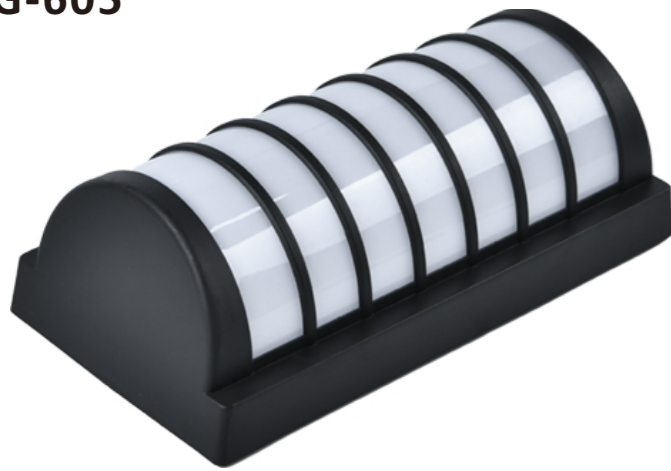


Item No	Power	Size	Input	Lumen	Material
XG-605	24W	L270*W135*H85mm	AC 85-265V 50-60Hz	100LM/W	PP+PP

XG-607




Item No	Power	Size	Input	Lumen	Material
XG-607	24W	L244*W128*H97mm	AC 85-265V 50-60Hz	100LM/W	PP+PP

XG-501

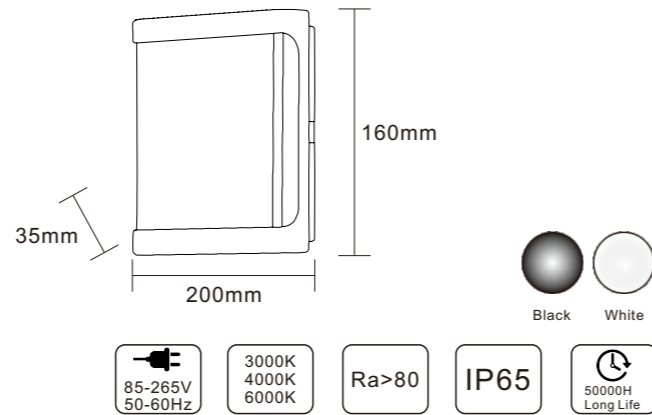

Item No	Power	Size	Input	Lumen	Material
XG-501	24W	L200*W160*H35mm	AC 85-265V 50-60Hz	100LM/W	PP+PP

XG-502

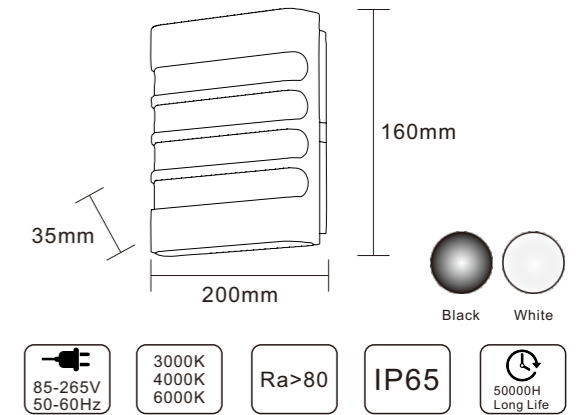


Item No	Power	Size	Input	Lumen	Material
XG-502	24W	L200*W160*H35mm	AC 85-265V 50-60Hz	100LM/W	PP+PP

TECHNICAL SPECIFICATIONS

Product Name :	Moisture-proof lamps
Model no:	XG-501/502/503/504/505/506/507
Power :	24W
Color :	White / Black
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	SMD2835
Lumen :	100 LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	120°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	PP
Cover material :	PP
Lighning protection :	1.5-4KV
Sealing material :	Gule
Protection class :	Ip65



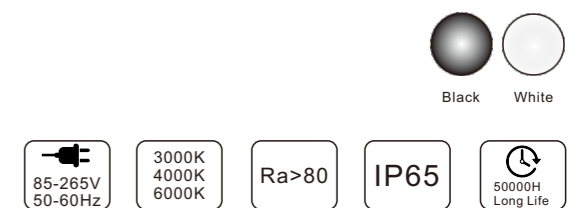

XG-503








Item No	Power	Size	Input	Lumen	Material
XG-503	24W	L200*W160*H35mm	AC 85-265V 50-60Hz	100LM/W	PP+PP

XG-504







 Black White






 85-265V
50-60Hz
  3000K
4000K
6000K
  Ra>80
  IP65
  50000H
Long Life

Item No	Power	Size	Input	Lumen	Material
XG-504	24W	L200*W160*H35mm	AC 85-265V 50-60Hz	100LM/W	PP+PP

XG-506






 Black White

 85-265V
50-60Hz
  3000K
4000K
6000K
  Ra>80
  IP65
  50000H
Long Life


Item No	Power	Size	Input	Lumen	Material
XG-506	24W	L200*W160*H35mm	AC 85-265V 50-60Hz	100LM/W	PP+PP

XG-505







 Black White






 85-265V
50-60Hz
  3000K
4000K
6000K
  Ra>80
  IP65
  50000H
Long Life

Item No	Power	Size	Input	Lumen	Material
XG-505	24W	L200*W160*H35mm	AC 85-265V 50-60Hz	100LM/W	PP+PP

XG-507





 Black White


 85-265V
50-60Hz
  3000K
4000K
6000K
  Ra>80
  IP65
  50000H
Long Life

Item No	Power	Size	Input	Lumen	Material
XG-507	24W	L200*W160*H35mm	AC 85-265V 50-60Hz	100LM/W	PP+PP





TECHNICAL SPECIFICATIONS

Product Name :	Moisture-proof lamps
Model no:	XG-401/402/403/404/405/406
Power :	24W
Color :	White / Black
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	SMD2835
Lumen :	100 LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	120°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	PP
Cover material :	PP
Lighning protection :	1.5-4KV
Sealing material :	Gule
Protection class :	Ip65





XG-401





Item No	Power	Size	Input	Lumen	Material
XG-401	24W	L260*W135*H67mm	AC 85-265V 50-60Hz	100LM/W	PP+PP

XG-402





Item No	Power	Size	Input	Lumen	Material
XG-402	24W	L260*W135*H67mm	AC 85-265V 50-60Hz	100LM/W	PP+PP

XG-403





Item No	Power	Size	Input	Lumen	Material
XG-403	24W	L260*W135*H67mm	AC 85-265V 50-60Hz	100LM/W	PP+PP

XG-405





Item No	Power	Size	Input	Lumen	Material
XG-405	24W	L260*W135*H67mm	AC 85-265V 50-60Hz	100LM/W	PP+PP

XG-404




Item No	Power	Size	Input	Lumen	Material
XG-404	24W	L260*W135*H67mm	AC 85-265V 50-60Hz	100LM/W	PP+PP

XG-406



Item No	Power	Size	Input	Lumen	Material
XG-406	24W	L260*W135*H67mm	AC 85-265V 50-60Hz	100LM/W	PP+PP

XG-301

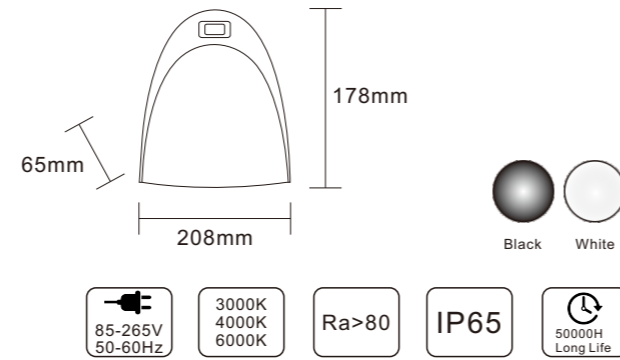

Item No	Power	Size	Input	Lumen	Material
XG-301	24W+2W	L208*W178*H65mm	AC 85-265V 50-60Hz	100LM/W	PP+PP


TECHNICAL SPECIFICATIONS

Product Name :	Moisture-proof lamps
Model no:	XG-301
Power :	24W+2W
Color :	White / Black
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	SMD2835
Lumen :	100 LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	120°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	PP
Cover material :	PP
Lighning protection :	1.5-4KV
Sealing material :	Gule
Protection class :	Ip65





XG-01

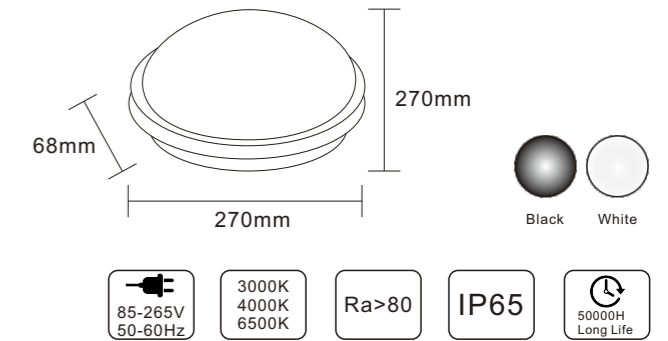


Item No	Power	Size	Input	Lumen	Material
XG-01	36W	∅ 270*H68mm	AC 85-265V 50-60Hz	100LM/W	PP+PP
	24W	∅ 215*H60mm			
	15W	∅ 164*H52mm			

TECHNICAL SPECIFICATIONS

Product Name :	Moisture-proof lamps
Model no:	XG-01/02
Power :	36W/24W/15W
Color :	White / Black
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	SMD2835
Lumen :	100 LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	120°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	PP
Cover material :	PP
Lighning protection :	1.5-4KV
Sealing material :	Gule
Protection class :	Ip65




XG-02

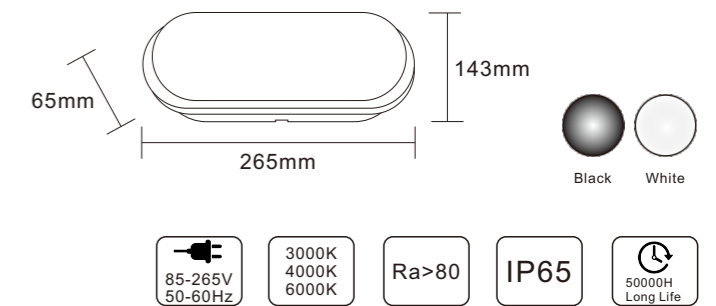

Item No	Power	Size	Input	Lumen	Material
XG-02	24W	L265*W143*H65mm	AC 85-265V 50-60Hz	100LM/W	PP+PP
	15W	L210*W112*H55mm			

XG-SN01

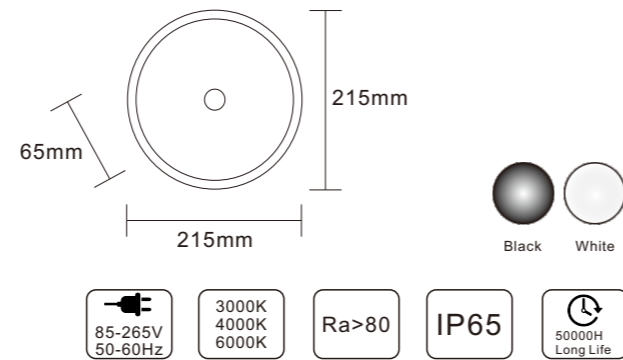


Item No	Power	Size	Input	Lumen	Material
XG-SN01	24W	Ø 215*H65mm	AC 85-265V 50-60Hz	100LM/W	PP+PP
	16W	Ø 164*H63mm			

TECHNICAL SPECIFICATIONS

Product Name :	Moisture-proof lamps
Model no:	XGSN01/WZ01/WZ02
Power :	24W/20W/15W
Color :	White / Black
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	SMD2835
Lumen :	100 LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	120°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	PP
Cover material :	PP
Lighning protection :	1.5-4KV
Sealing material :	Gule
Protection class :	Ip65





XG-WZ01

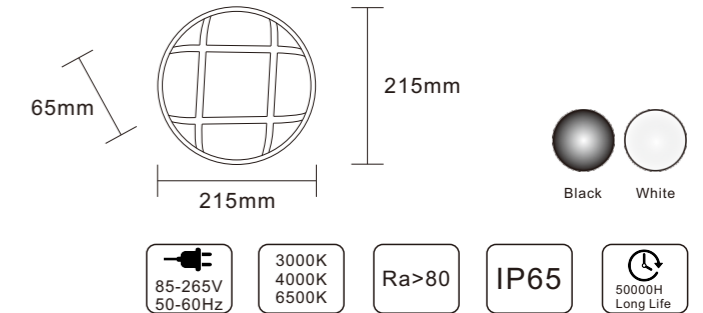


Item No	Power	Size	Input	Lumen	Material
XG-WZ01	24W	Ø 215*H65mm	AC 85-265V 50-60Hz	100LM/W	PP+PP
	15W	Ø 164*H63mm			

XG-WZ02

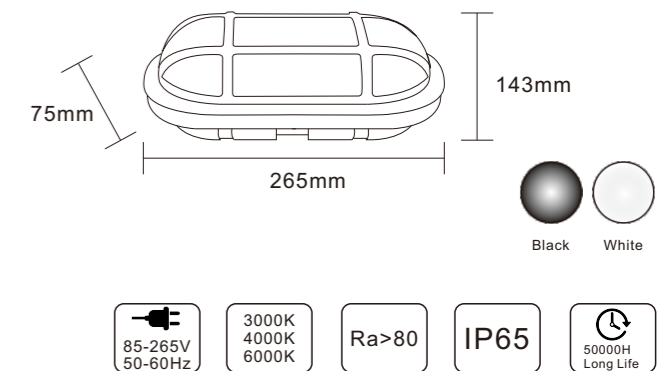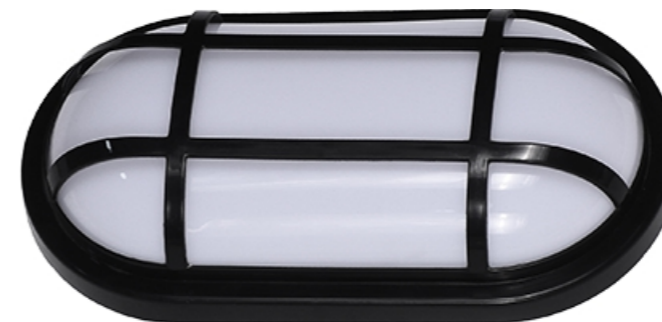

Item No	Power	Size	Input	Lumen	Material
XG-WZ02	20W	L265*W143*H75mm	AC 85-265V 50-60Hz	100LM/W	PP+PP
	15W	L210*W112*H63mm			

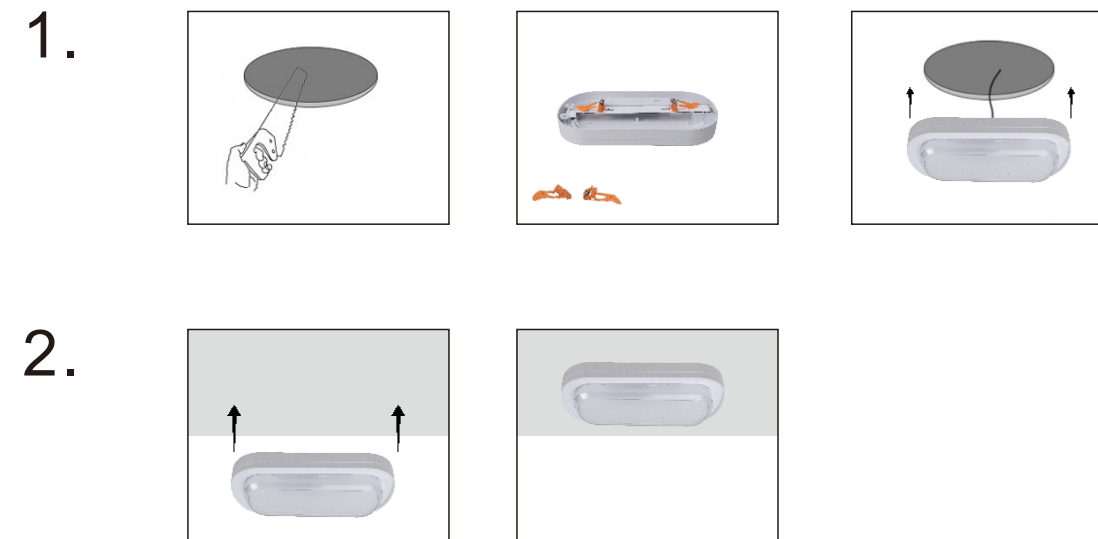

TECHNICAL SPECIFICATIONS


Product Name :	Moisture-proof lamps
Model no:	XG-907/906/909/908
Power :	24W
Color :	White / Black
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	SMD2835
Lumen :	100 LM/W
Colour Temperture :	3000K - 6500K/CCT
Colour Rendering Index :	CRI>80
Beam angle :	120°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	ABS
Cover material :	PS
Lighning protection :	1.5-4KV
Sealing material :	Glue
Protection class :	Ip65



XG-907





XG-906

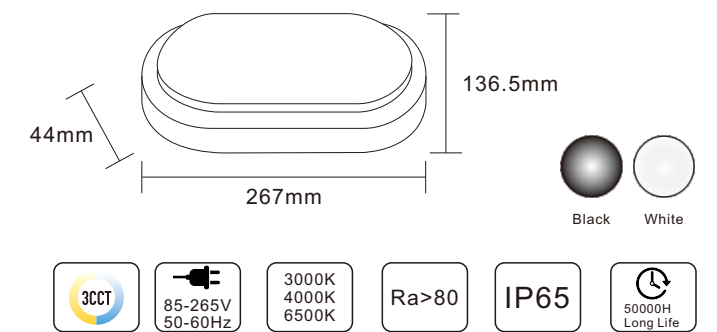


Item No	Power	Size	Input	Lumen	Material
XG-907	24W	L267*W136.5*H44mm	AC 85-265V 50-60Hz	100LM/W	ABS+PS
XG-906					ABS+PS

1.





2.



XG-909



XG-908

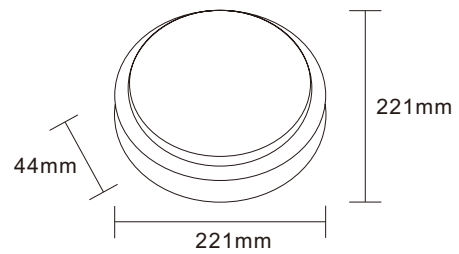

Item No	Power	Size	Input	Lumen	Material
XG-909	24W	221*H44mm	AC 85-265V 50-60Hz	100LM/W	ABS+PS
XG-908					ABS+PS