



SERIES PRODUCTS



XG-DV

XG-DR

XG-DL



XG-BH

XG-FFL

XG-LS

LED TRACK LIGHT

Track light system

track light is made of high quality extruded aluminum alloy in durable corrosion resistance, anti-fading and antiscratch electrostatic thermo-painting finish. Professionally reflector designed according to different situations, and 15° /24° /36° beam angles available. Advance thermal management technology to ensure consistency of LED life span, color temperature and maximize output lumens. There are both track and ceiling mounted installed way for this fixture.

Installation: Track, easy to install and to adjust. Light source: full spectrum COB LED module, improve color reproduction, CRI 80/90, Rg > 94, Rf > 83, MacAdam ≤ 3, 50,000h.

Cooling system: passive cooling (perfect design of air convection) heat sink made from die-cast aluminium, Using high-quality aluminium, environmental protection and no pollution. Optic: Unique optical design, highly efficient with uniform distribution, precise light distribution, anti-glare. Control gear: Isolation constant current driver with EMC EMS and OLP/SCP/OVP protections. IP protection: IP40. Applications: Commercial space, Star hotel, Show room, Office, Exhibition hall, Museum, Club, Villa, Luxury flats etc.






XG-GD001

TECHNICAL SPECIFICATIONS

Product Name :	Led Linear Track Light
Power :	10W/20W 30W 40W
Color :	White / Black
Input :	AC100V-265V
Temperature range :	-20-50°C
Light source :	SMD3030
Lumen :	80LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	24°
Power factor :	Pf>0.5
Power efficiency :	92%
Housing material:	Aluminum
Cover material :	PC+Lens
Lighning protection :	1.5-4KV
Protection class :	Ip20




XG-GD001 SERIES

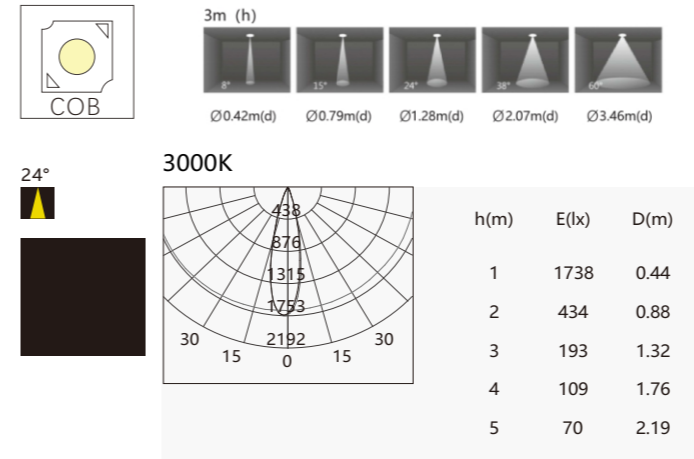


Ac100V-265V	UGR≤6	LED	50000H Long Life
IP20	3000K	4000K	6500K
OSRAM	SAN AN	CREE	BRIDGELUX
BK	WH		


ITEM: GD001-5-10W

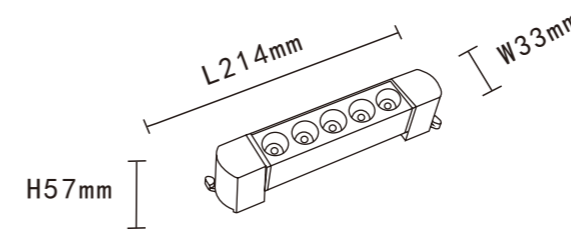


ITEM: GD001-10-20W

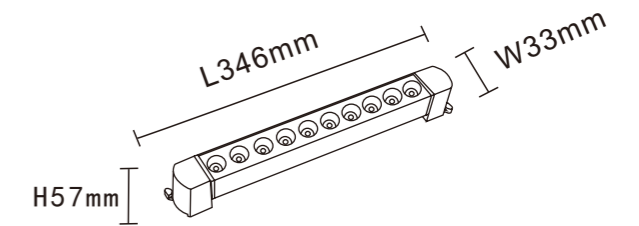

ITEM: GD001-15-30W

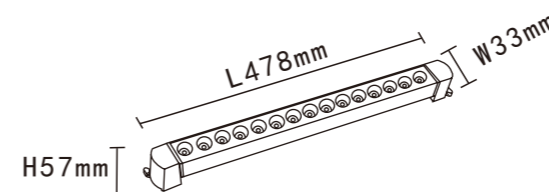

ITEM: GD001-20-40W

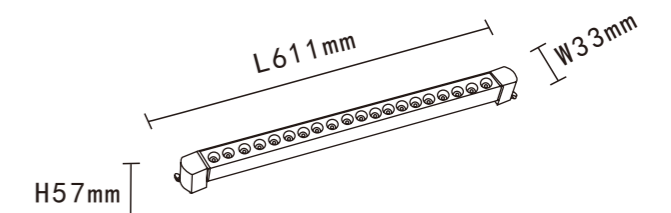



XG-GD002

TECHNICAL SPECIFICATIONS

Product Name :	Led Linear Track Light
Power :	10W/20W 30W 40W
Color :	White / Black
Input :	AC100V-265V
Temperature range :	-20-50°C
Light source :	SMD2835
Lumen :	80LM/W
Colour Temperture :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	110°
Power factor :	Pf>0.5
Power efficiency :	92%
Housing material:	Aluminum
Cover material :	PC diffuser
Lighning protection :	1.5-4KV
Protection class :	Ip20



XG-GD002 SERIES

SMD

110°


12W

3000K


h(m)	E(lx)	D(m)
1	392	2.18
2	98	4.36
3	44	6.54
4	25	8.72
5	16	10.90

AC100V-265V	UGR≤6	LED	50000H Long Life
Home icon	IP20	3000K	4000K
OSRAM	SAN AN	CREE	BRIDGELUX
	BK	WH	


ITEM:
GD002-5-10W

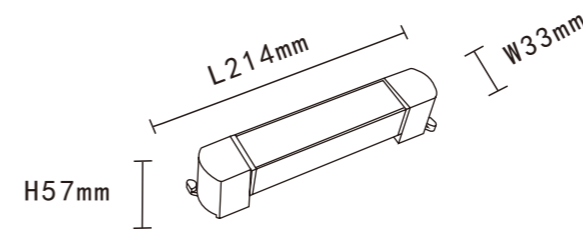


ITEM:
GD002-10-20W

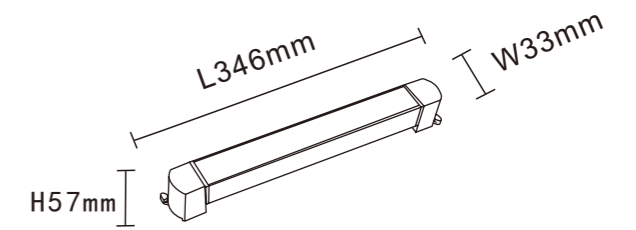

ITEM:
GD002-15-30W

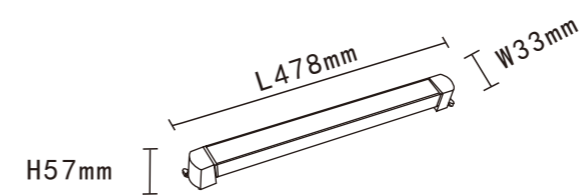


ITEM:
GD002-20-40W



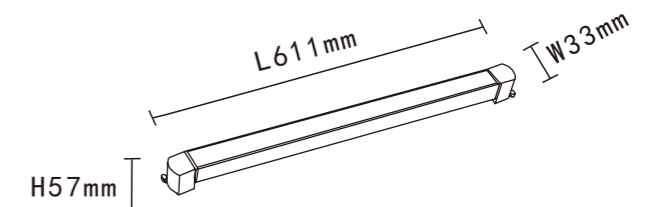




XG-GD003 SERIES

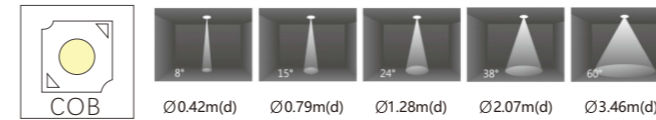

Ac100V-265V	UGR≤6	LED	50000H Long Life
Home icon	Grid icon	Grid icon	IP20
3CCT	3000K	4000K	6500K
OSRAM	SAN AN	CREE	BRIDGELUX
	BK	WH	

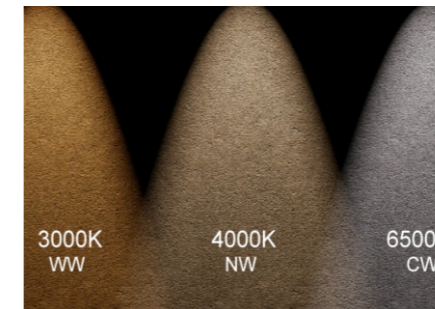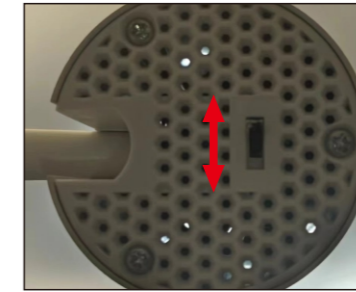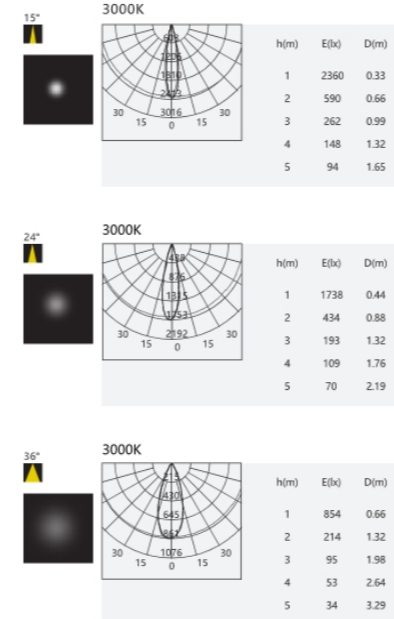


XG-GD003

TECHNICAL SPECIFICATIONS


Product Name :	Led Track Light
Power :	10W/20W/30W 10W-CCT/18W-CCT/24W-CCT
Color :	White / Black
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	COB
Lumen :	80-110LM/W
Colour Temperture :	3000K - 6500/CCT
Colour Rendering Index :	CRI>80
Beam angle :	120°
Power factor :	Pf>0.5 15° 24°36
Power efficiency :	92%
Housing material :	Aluminum
Cover material :	PC+Lens
Lighning protection :	1.5-4KV
Protection class :	Ip20




ITEM:
GD003-5-10W
10W-CCT

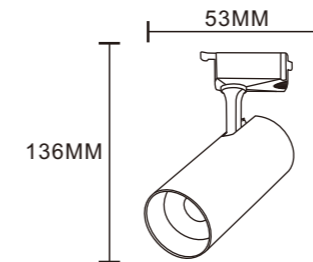

ITEM:
GD003-10-20W
18W-CCT

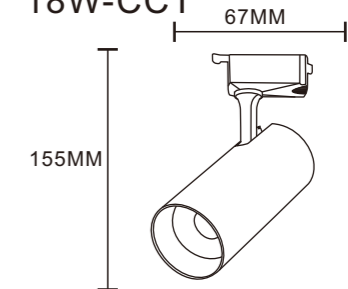


ITEM:
GD003-15-30W
24W-CCT



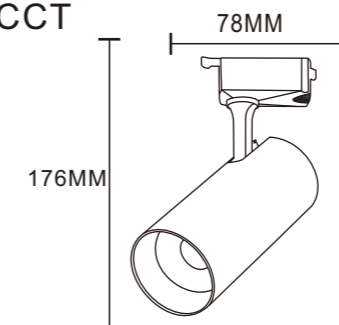




XG-DV SERIES



85-265V 50-60Hz	UGR≤6	LED	50000H Long Life
IP20	3000K Ra≥80	4000K Ra≥80	6500K Ra≥80
OSRAM	SAN AN	CREE	BRIDGELUX

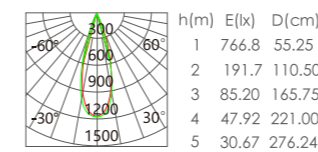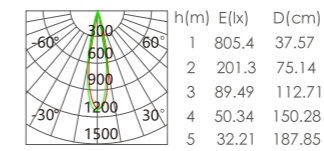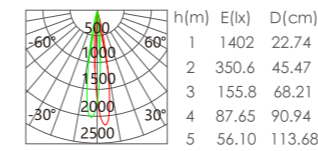


XG-DV

TECHNICAL SPECIFICATIONS


Product Name :	LED TRACK LIGHT
Model no:	XG-DV
Power :	25W/35W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	COB
Lumen :	80-110 LM/W
Colour Temperature :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	15°/24°/36°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Die-casting Aluminium
Optical material :	Reflective cup
Lighning protection :	1.5-4KV
Protection class :	Ip20



MODEL :
XG-DV-25W

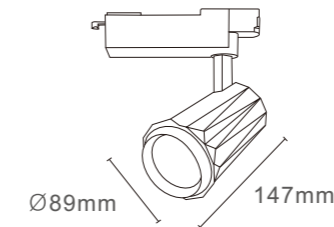


MODEL :
XG-DV-35W



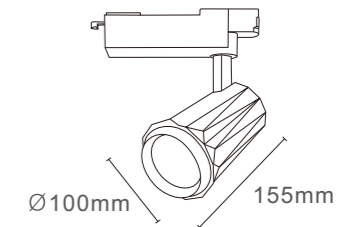




XG-DR SERIES



85-265V 50-60Hz	UGR≤6	LED	50000H Long Life
IP20	IP20	IP20	IP20
3000K Ra>80	4000K Ra>80	6500K Ra>80	
OSRAM	SAN AN	CREE	BRIDGELUX

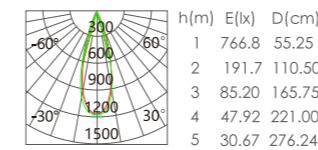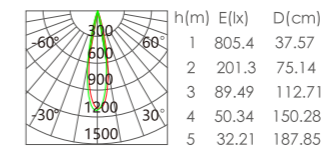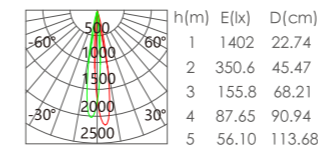


XG-DR

TECHNICAL SPECIFICATIONS

Product Name :	LED TRACK LIGHT
Model no:	XG-DR
Power :	40W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	COB
Lumen :	80-110 LM/W
Colour Temperature :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	15°/24°/36°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Die-casting Aluminium
Cover material :	Lens
Lighning protection :	1.5-4KV
Protection class :	Ip20



MODEL :
XG-DR-40W

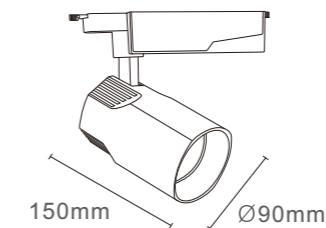







XG-DL

TECHNICAL SPECIFICATIONS

Product Name :	LED TRACK LIGHT
Model no:	XG-DL
Power :	30W/35W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	COB
Lumen :	80-110 LM/W
Colour Temperature :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	15°/24°/36°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Die-casting Aluminium
Optical material :	Reflective cup
Lighning protection :	1.5-4KV
Protection class :	Ip20




XG-DL SERIES

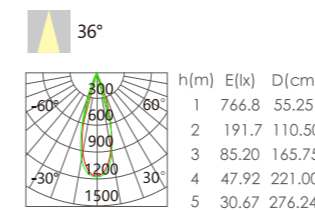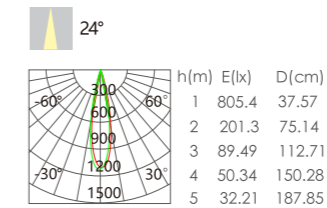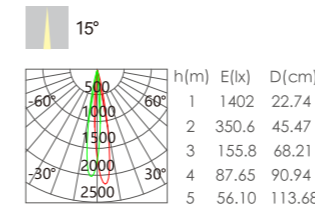


85-265V 50-60Hz	UGR≤6	LED	50000H Long Life
House icon	IP20	3000K Ra>80	4000K Ra>80
		6500K Ra>80	
OSRAM	SAN AN	CREE	BRIDGELUX

MODEL :
XG-DL-30W/35W



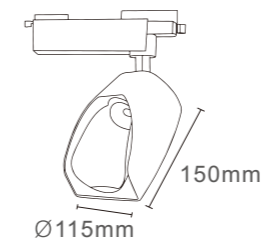




XG-BH SERIES



85-265V 50-60Hz	UGR≤6	LED	50000H Long Life
IP20	IP20	IP20	IP20
3000K Ra>80	4000K Ra>80	6500K Ra>80	
OSRAM	SAN AN	CREE	BRIDGELUX

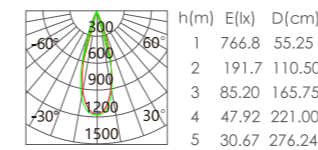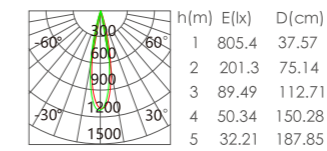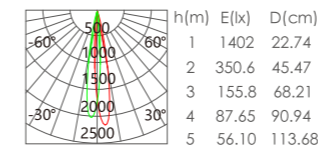


XG-BH

TECHNICAL SPECIFICATIONS


Product Name :	LED TRACK LIGHT
Model no:	XG-BH
Power :	20W/30W/40W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	COB
Lumen :	80-110 LM/W
Colour Temperature :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	15°/24°/36°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Die-casting Aluminium
Cover material :	Lens
Lighning protection :	1.5-4KV
Protection class :	Ip20




**MODEL :
XG-BH-20W**

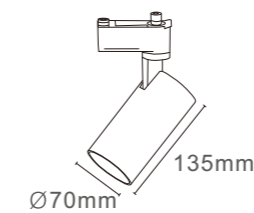

**MODEL :
XG-BH-30W**

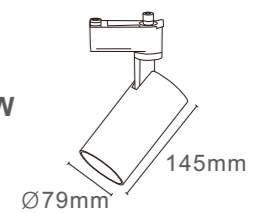


**MODEL :
XG-BH-40W**








XG-FFL SERIES



85-265V 50-60Hz	UGR≤6	LED	50000H Long Life
IP20	IP20	IP20	IP20
3000K Ra≥80	4000K Ra≥80	6500K Ra≥80	
OSRAM	SAN AN	CREE	BRIDGELUX

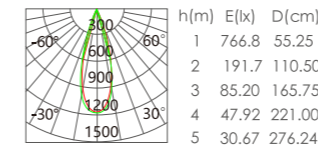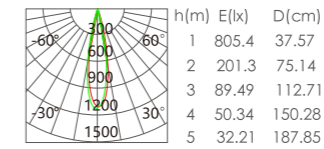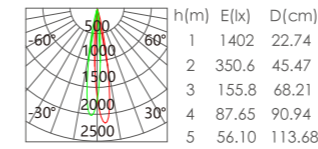


XG-FFL

TECHNICAL SPECIFICATIONS


Product Name :	LED TRACK LIGHT
Model no:	XG-FFL
Power :	20W/30W/35W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	COB
Lumen :	80-110 LM/W
Colour Temperature :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	15°/24°/36°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Die-casting Aluminium
Cover material :	Lens
Lighning protection :	1.5-4KV
Protection class :	Ip20




**MODEL :
XG-FFL-20W**

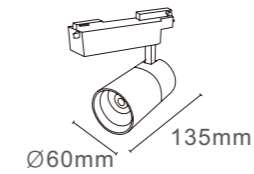

**MODEL :
XG-FFL-30W**

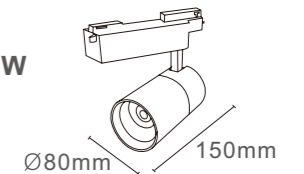


**MODEL :
XG-FFL-35W**



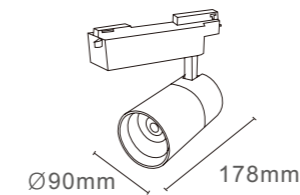




XG-LS SERIES



85-265V 50-60Hz	UGR≤6	LED	50000H Long Life
IP20	3000K Ra>80	4000K Ra>80	6500K Ra>80
OSRAM	SAN AN	CREE	BRIDGELUX

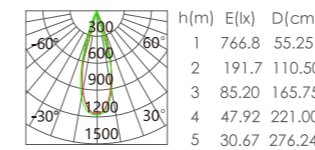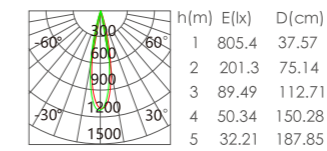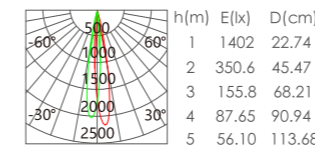


XG-LS

TECHNICAL SPECIFICATIONS


Product Name :	LED TRACK LIGHT
Model no:	XG-LS
Power :	10W/20W/30W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	COB
Lumen :	80-110 LM/W
Colour Temperature :	3000K - 6500K
Colour Rendering Index :	CRI>80
Beam angle :	15°/24°/36°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Die-casting Aluminium
Cover material :	Lens
Lighning protection :	1.5-4KV
Protection class :	Ip20




**MODEL :
XG-LS-10W**



**MODEL :
XG-LS-20W**



**MODEL :
XG-LS-30W**



RAIL FITTING



MODEL :
XG-093

L100*W35*H15mm
L150*W35*H15mm
L200*W35*H15mm
L300*W35*H15mm

MATERIAL :
PVC+COPPER



MODEL :
XG-001

L100*W38*H18mm
L150*W38*H18mm
L200*W38*H18mm
L300*W38*H18mm

MATERIAL :
Aluminum+COPPER



MODEL :
XG-004

L100*W38*H18mm
L150*W38*H18mm
L200*W38*H18mm
L300*W38*H18mm

MATERIAL :
Aluminum+COPPER



MODEL :
XG-009

L100*W33.5*H17mm
L150*W33.5*H17mm
L200*W33.5*H17mm
L300*W33.5*H17mm

MATERIAL :
Aluminum+COPPER



MODEL :
XG-011

L100*W34*H21mm
L150*W34*H21mm
L200*W34*H21mm
L300*W34*H21mm


MATERIAL :
Aluminum+COPPER



MODEL :
XG-022-1

L80*W41*H17mm

MATERIAL :
PVC+COPPER



MODEL :
XG-022-1

L80*W41*H17mm


MATERIAL :
PVC+COPPER



MODEL :
XG-022-2

L70*W33*H15mm

MATERIAL :
PVC+COPPER

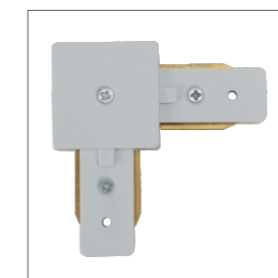

MODEL :
XG-022-2

L70*W33*H15mm

MATERIAL :
PVC+COPPER