



KVI

MAKE LIGHT MORE VALUABLE



WE ARE
KVI
Lighting

Our Mission

Make Light More Valuable

Our Vision

To Be The Most Trusted Supplier Of Customers

Certificate



China Compulsory Certification



European Conformity




IECEE-CB

IP Rating

An IP Rating is represented by two numbers. The first number determines the protection rating against solid objects or materials. The second number determines the protection rating against the ingress of liquid or moisture.

IP20



No waterproof

Suitable for dry environment


IP55



Gel coating


Suitable for damp environment

IP65



Nano waterproof


Suitable for damp environment



Nano waterproof

Suitable for damp environment


IP67



Silicone filling waterproof


Suitable for short-time wet environment

IP68




Extrusion strip waterproof

Suitable for short-time wet environment

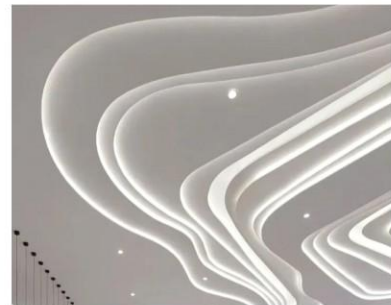

LED strip Introduction

CCT

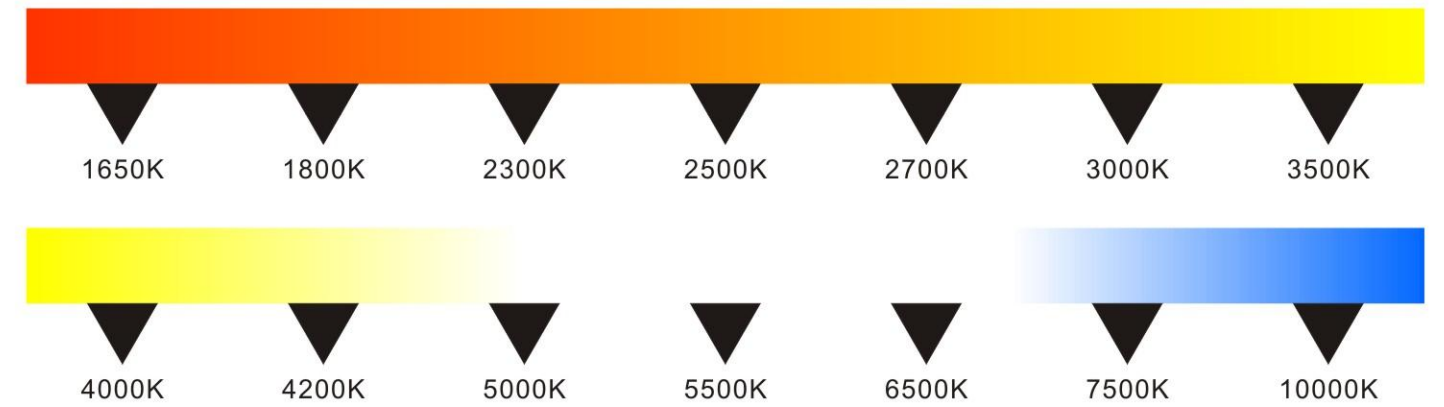

Color



Voltage

24V DC 12V DC


CRI

Ra>95 Ra>90 Ra>80

LEDs/m




FPCB Width




Length/Reel

5m REEL 10m REEL OEM REEL


2835-120D-12V-5MM
2835-120D-24V-5MM

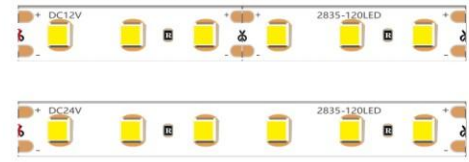


2835-120D-12V-8MM
2835-120D-24V-8MM

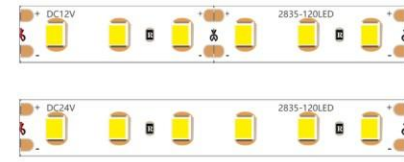


2835-180D-12V-10MM
2835-180D-24V-10MM




2835-240D-12V-10MM
2835-240D-24V-10MM




2835-240D-24V-10MM / 15MM

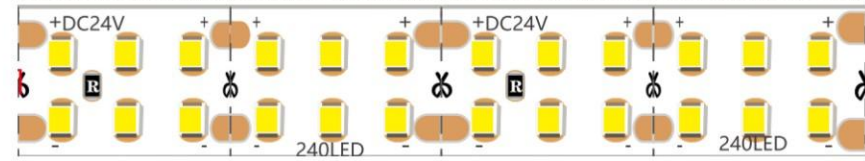


2835-360D-24V-20MM / 24MM / 30MM

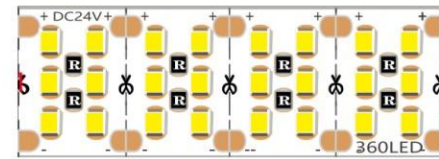


COB -12V- 320D /400D /5MM
COB -24V- 320D /392D /5MM

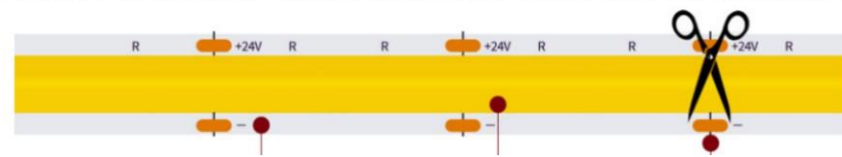


COB -12V- 252D /300D /330D /480D / 8MM
COB -24V- 252D /320D /336D /480D / 8MM

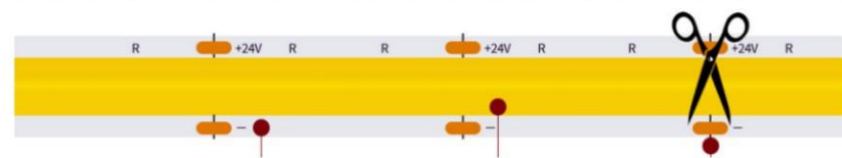

COB -12V- 300D /10MM
COB -24V- 308D /10MM

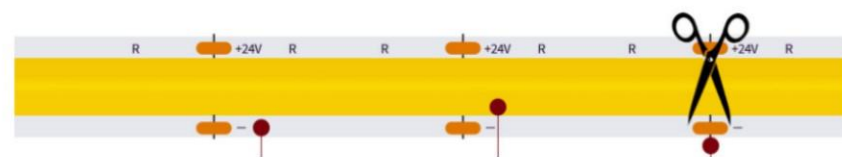


2835-120D-5MM

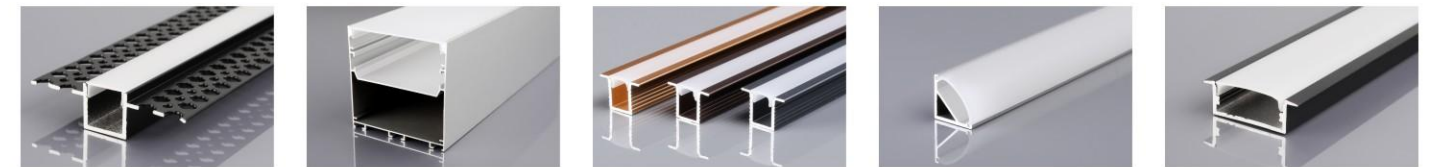

Model	2835-120D-5MM-IP20
Power/Meter	10-12W
Voltage	DC12V/24V
Roll of length	5meter/roll 10meter/roll
Cutting unit	12V(25MM-3LED)/24V(50MM-6LED)
PCB width	PCB:5MM
CRI	CRI > 95/CRI > 90/CRI > 80
Color	WW NW WH RD GR BL PK IB AM LY
Level	H(High Quality)/A(Good quality)/B(economy)
IP Rating(Optional)	IP20(IP55,IP65,IP67,IP68)
Tape Type	3M/Red tape/Blue tape




2835-120D-8MM

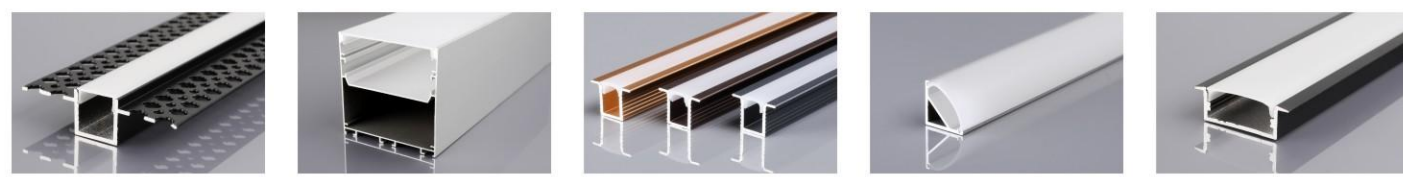

Model	2835-120D-8MM-IP20
Power/Meter	10-12W
Voltage	DC12V/24V
Roll of length	5meter/roll 10meter/roll
Cutting unit	12V(25MM-3LED)/24V(50MM-6LED)
PCB width	PCB:8MM
CRI	CRI > 95/CRI > 90/CRI > 80
Color	WW NW WH RD GR BL PK IB AM LY
Level	H(High Quality)/A(Good quality)/B(economy)
IP Rating(Optional)	IP20(IP55,IP65,IP67,IP68)
Tape Type	3M/Red tape/Blue tape




2835-180D-10MM

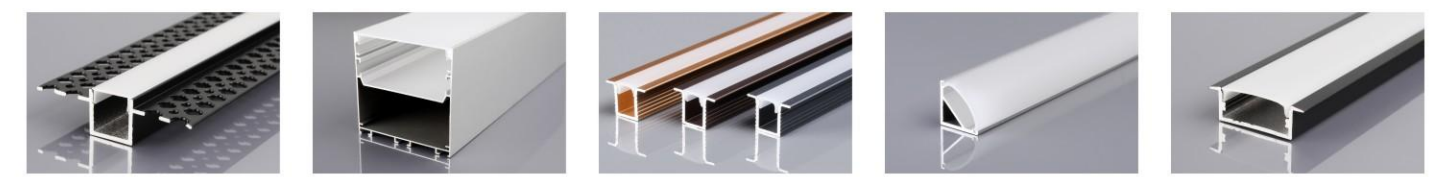

Model	2835-180D-10MM-IP20
Power/Meter	16-18W
Voltage	DC12V/24V
Roll of length	5meter/roll 10meter/roll
Cutting unit	12V(16.5MM-3LED)/24V(33MM-6LED)
PCB width	PCB:10MM
CRI	CRI > 95/CRI > 90/CRI > 80
Color	WW NW WH RD GR BL PK IB AM LY
Level	H(High Quality)/A(Good quality)/B(economy)
IP Rating(Optional)	IP20(IP55,IP65,IP67,IP68)
Tape Type	3M/Red tape/Blue tape




2835-240D-10MM

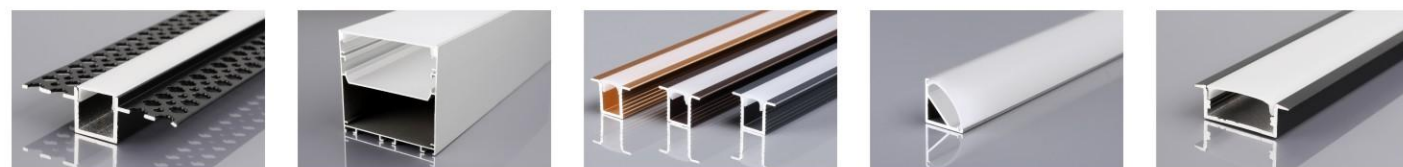

Model	2835-240D-10MM-IP20
Power/Meter	22-24W
Voltage	DC12V/24V
Roll of length	5meter/roll 10meter/roll
Cutting unit	12V(14.75MM-3LED)/24V(29.5MM-6LED)
PCB width	PCB:10MM
CRI	CRI > 95/CRI > 90/CRI > 80
Color	WW NW WH RD GR BL PK IB AM LY
Level	H(High Quality)/A(Good quality)/B(economy)
IP Rating(Optional)	IP20(IP55,IP65,IP67,IP68)
Tape Type	3M/Red tape/Blue tape



2835-240D-15MM

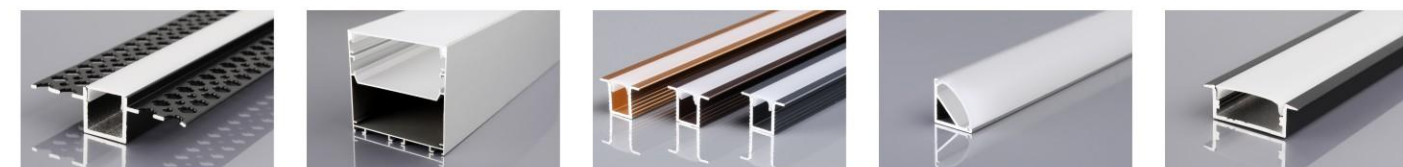

Model	2835-240D-15MM-IP20
Power/Meter	22-24W
Voltage	DC12V/24V
Roll of length	5meter/roll 10meter/roll
Cutting unit	24V(25MM-6LED)
PCB width	PCB:15MM
CRI	CRI > 95/CRI > 90/CRI > 80
Color	WW NW WH RD GR BL PK IB AM LY
Level	H(High Quality)
IP Rating(Optional)	IP20(IP55,IP65,IP67,IP68)
Tape Type	3M/Red tape/Blue tape



2835-360D


① 纯铜导线 散热快,性能更稳定

② 2835 高亮高显灯珠

③ 高强粘合 采用正品3M背胶

④ 预留裁剪 可根据不同需要进行裁剪

17mm

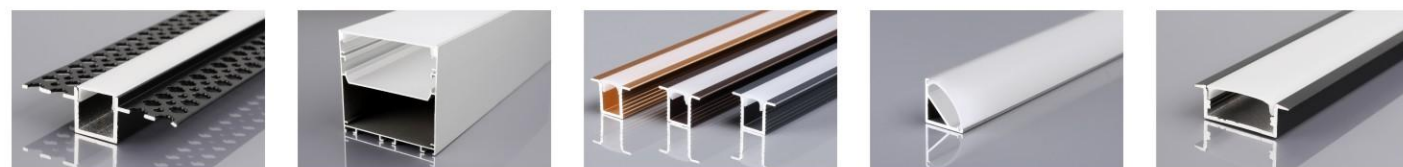

Model	2835-360D-IP20
Power/Meter	32-36W
Voltage	24V
Roll of length	5meter/roll 10meter/roll
Cutting unit	24V(17MM-6LED)
PCB width	PCB:20MM/24MM/30MM
CRI	CRI > 95/CRI > 90/CRI > 80
Color	WW NW WH RD GR BL PK IB AM LY
Level	H(High Quality)
IP Rating(Optional)	IP20(IP55,IP65,IP67,IP68)
Tape Type	3M/Red tape/Blue tape



2835-192D-WH+WW

① 纯铜导线 散热快,性能更稳定


② 2835 高亮高显灯珠

③ 高强粘合 采用正品3M背胶

④ 预留裁剪 可根据不同需要进行裁剪

31mm



62mm

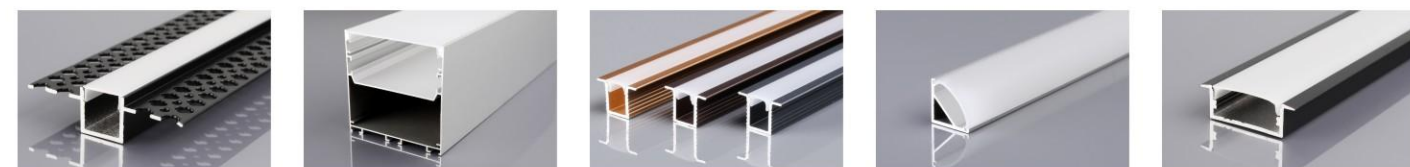

Model	2835-192D-WH+WW-10MM-IP20
Power/Meter	9W+9W
Voltage	DC12V/24V
Roll of length	5meter/roll 10meter/roll
Cutting unit	12V(31MM-6LED)/24V(62MM-12LED)
PCB width	PCB:15MM
CRI	CRI > 95/CRI > 90/CRI > 80
Color	WW + WH
Level	H(High Quality)
IP Rating(Optional)	IP20(IP55,IP65,IP67,IP68)
Tape Type	3M/Red tape/Blue tape




COB-5MM

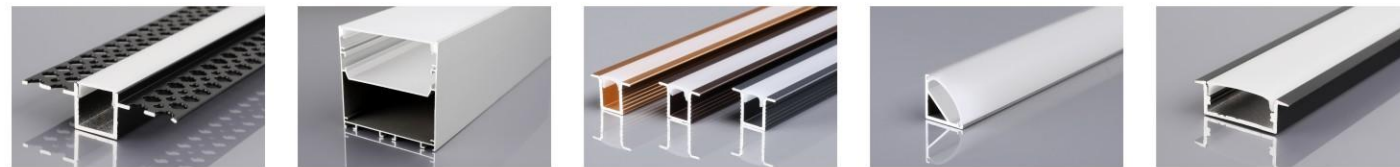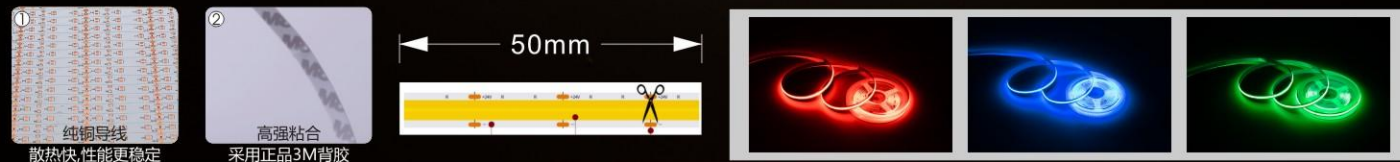

Model	COB-5MM
Power/Meter	7W/9W
Voltage	DC12V/24V
Roll of length	5meter/roll 10meter/roll
Cutting unit	320D:12V(50MM CUT),24V(50MM CUT),320D 400D:12V(10MM CUT),24V(35.7MM CUT),392D
PCB width	PCB:5MM
CRI	CRI > 95/CRI > 90/CRI > 80
Color	WW NW WH RD GR BL PK IB AM LY
Level	H(High Quality)/A(Good quality)
IP Rating(Optional)	IP20(IP55,IP65,IP67,IP68)
Tape Type	3M/Red tape/Blue tape




COB-8MM

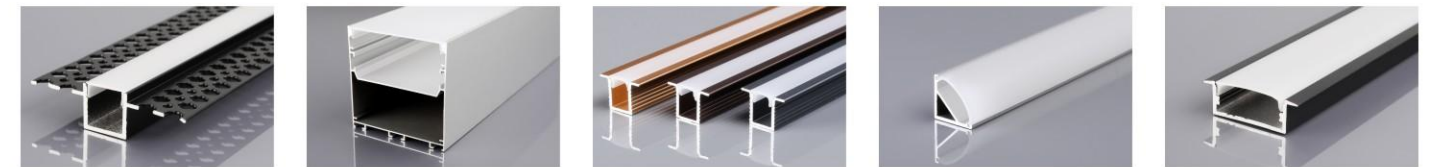

Model	COB-8MM
Power/Meter	10W
Voltage	DC12V/24V
Roll of length	5meter/roll 10meter/roll
Cutting unit	252D:12V(36MM CUT),252D 24V(55MM CUT) 330D:12V(45MM CUT),336D 24V(42MM CUT) 300D:12V(50MM CUT),320D 24V(50MM CUT) 480D:12V(25MM CUT),480D 24V(33MM CUT)
PCB width	PCB:8MM
CRI	CRI > 95/CRI > 90/CRI > 80
Color	WW NW WH RD GR BL PK IB AM LY
Level	H(High Quality)/A(Good quality)/B(economy)
IP Rating(Optional)	IP20(IP55,IP65,IP67,IP68)
Tape Type	3M/Red tape/Blue tape



COB-10MM

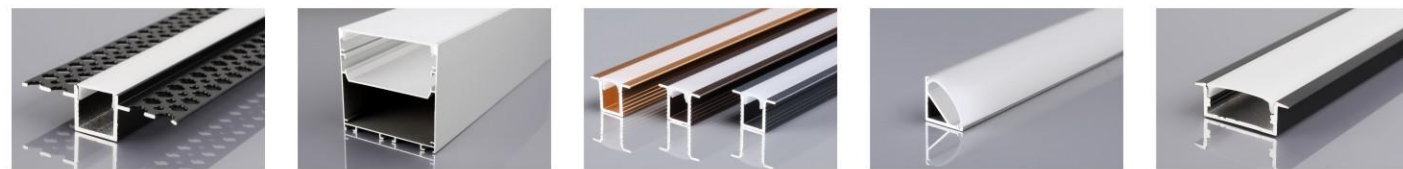

Model	COB-10MM
Power/Meter	14W
Voltage	DC12V/24V
Roll of length	5meter/roll 10meter/roll
Cutting unit	300D:12V(50MM CUT) 308D:24V(46MM CUT)
PCB width	PCB:10MM
CRI	CRI > 95/CRI > 90/CRI > 80
Color	WW NW WH RD GR BL PK IB AM LY
Level	H(High Quality)/A(Good quality)
IP Rating(Optional)	IP20(IP55,IP65,IP67,IP68)
Tape Type	3M/Red tape/Blue tape



ITEM NO	BODY SIZE	MATERIAL	VOLTAGE	OUTPUT	PCS/CTN
D-100W-48V	L143*W48*H24mm	Aluminum	175-265V	48V 2.08A	150PCS
D-200W-48V	L200*W48*H25mm			48V 4.16A	70PCS
D-300W-48V	L208*W63*H30mm			48V 6.25A	55PCS
D-400W-48V	L227*W63*H30mm			48V 8.33A	55PCS



ITEM NO	BODY SIZE	MATERIAL	VOLTAGE	OUTPUT	PCS/CTN
CH-100W-48V	L335*W41*H22mm	Aluminum	175-265V	48V 6.25A	50PCS
CH-200W-48V	L303*W44*H22mm			48V 4.16A	50PCS
CH-300W-48V	L303*W44*H22mm			48V 2.08A	50PCS




ITEM NO	BODY SIZE	MATERIAL	VOLTAGE	OUTPUT	PCS/CTN
HF-100W-48V	L220*W41*H22mm	Aluminum	175-265V	48V 2.08A	50PCS
HF-200W-48V	L270*W41*H22mm			48V 4.16A	50PCS





ITEM NO	BODY SIZE	MATERIAL	VOLTAGE	OUTPUT	WATT	PCS/CTN
CA-60W-IP20	L153*W53*H22mm	Aluminum	175-265V	12V/24V	70% WATT	100PCS
CA-100W-IP20	L195*W53*H22mm					100PCS
CA-120W-IP20	L225*W53*H22mm					100PCS
CA-150W-IP20	L251*W53*H22mm					50PCS
CA-200W-IP20	L282*W53*H22mm					50PCS
CA-300W-IP20	L308*W53*H22mm					50PCS

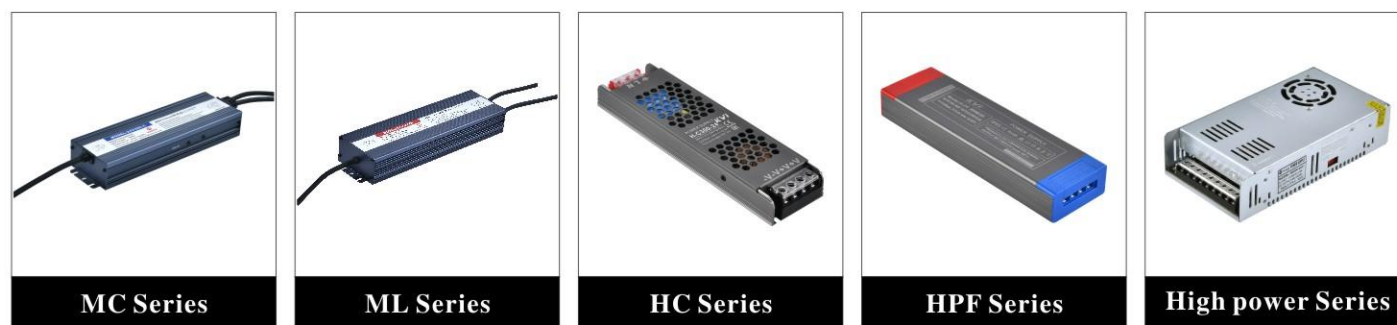

ITEM NO	BODY SIZE	MATERIAL	VOLTAGE	OUTPUT	WATT	PCS/CTN
CH-60W-IP20	L144*W35*H22.5mm	Aluminum	175-265V	12V/24V	70% WATT	120PCS
CH-100W-IP20	L141*W50*H23mm					90PCS
CH-150W-IP20	L141*W50*H23mm					90PCS
CH-200W-IP20	L180*W50*H23mm					80PCS
CH-300W-IP20	L238*W50*H23mm					64PCS
CH-400W-IP20	L238*W50*H23mm					64PCS



ITEM NO	BODY SIZE	MATERIAL	VOLTAGE	OUTPUT	WATT	PCS/CTN
CB-60W-IP20	L145*W53*H21mm	Aluminum	175-265V	12V/24V	70% WATT	100PCS
CB-100W-IP20	L168*W53*H21mm					100PCS
CB-150W-IP20	L234*W53*H21mm					50PCS
CB-200W-IP20	L280*W53*H21mm					50PCS
CB-300W-IP20	L308*W53*H21mm					50PCS
CB-400W-IP20	L365*W53*H21mm					50PCS



ITEM NO	BODY SIZE	MATERIAL	VOLTAGE	OUTPUT	WATT	PCS/CTN
GB-60W-IP20	L125*W49*H30mm	Aluminum	175-265V	24V	100% WATT	100PCS
GB-100W-IP20	L143*W49*H30mm					100PCS
GB-200W-IP20	L183*W49*H30mm					50PCS
GB-300W-IP20	L190*W60*H30mm					50PCS
GB-400W-IP20	L225*W60*H30mm					50PCS



ITEM NO	BODY SIZE	MATERIAL	VOLTAGE	OUTPUT	WATT	PCS/CTN
GL-45W-IP20	L119*W35*H21mm	Aluminum	175-265V	12V/24V	FULL WATT	200PCS
GL-60W-IP20	L119*W35*H21mm					200PCS
GL-100W-IP20	L143*W48*H24mm					150PCS
GL-150W-IP20	L183*W48*H24mm					100PCS
GL-200W-IP20	L200*W48*H25mm					70PCS
GL-250W-IP20	L208*W63*H25mm					55PCS
GL-300W-IP20	L208*W63*H30mm					55PCS
GL-400W-IP20	L227*W63*H30mm					55PCS




ITEM NO	BODY SIZE	MATERIAL	VOLTAGE	OUTPUT	WATT	PCS/CTN
MC-60W-IP68	L146*W37*H21mm	Aluminum	175-265V	12V/24V	85% WATT	90PCS
MC-80W-IP68	L155*W44*H21mm					80PCS
MC-100W-IP68	L195*W52*H21mm					50PCS
MC-150W-IP68	L193*W56*H25mm					35PCS
MC-200W-IP68	L215*W56*H25mm					35PCS
MC-250W-IP68	L235*W73*H37mm					15PCS
MC-300W-IP68	L235*W73*H37mm					15PCS
MC-400W-IP68	L260*W73*H37mm					15PCS



ITEM NO	BODY SIZE	MATERIAL	VOLTAGE	OUTPUT	WATT	PCS/CTN
ML-24W-IP68	L104*W37*H23mm	Aluminum	175-265V	12V/24V	100% WATT	100PCS
ML-36W-IP68	L138*W37*H23mm					100PCS
ML-45W-IP68	L138*W37*H23mm					100PCS
ML-60W-IP68	L155*W44*H21mm					80PCS
ML-80W-IP68	L185*W44*H21mm					50PCS
ML-100W-IP68	L225*W53*H19mm					50PCS
ML-150W-IP68	L215*W56*H30mm					35PCS
ML-200W-IP68	L245*W76*H38mm					15PCS
ML-250W-IP68	L245*W76*H38mm					15PCS
ML-300W-IP68	L275*W76*H38mm					15PCS
ML-350W-IP68	L275*W76*H38mm					15PCS
ML-400W-IP68	L275*W76*H38mm					15PCS



ITEM NO	BODY SIZE	MATERIAL	VOLTAGE	OUTPUT	WATT	PCS/CTN
HC-100W-IP54	L130*W42*H22mm	Aluminum	175-265V	12V/24V	FULL WATT	120PCS
HC-200W-IP54	L184*W49*H23mm					90PCS
HC-300W-IP54	L211*W55*H25mm					60PCS
HC-400W-IP54	L220*W58*H30mm					50PCS

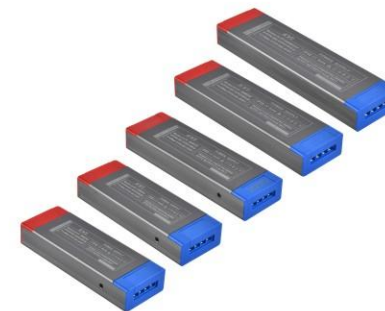

ITEM NO	BODY SIZE	MATERIAL	VOLTAGE	OUTPUT	WATT	PCS/CTN
HPF-100W-IP55	L164*W58*H29mm	Aluminum	90-265V	12V/24V	FULL WATT	50PCS
HPF-150W-IP55	L164*W58*H29mm					50PCS
HPF-200W-IP55	L190*W58*H29mm					50PCS
HPF-300W-IP55	L219*W63*H30mm					40PCS
HPF-400W-IP55	L239*W63*H30mm					35PCS



ITEM NO	BODY SIZE	MATERIAL	VOLTAGE	OUTPUT	WATT	PCS/CTN
HW-500W-IP20	L215*W113*H49mm	Aluminum	175-265V	24V	FULL WATT	25PCS
HW-600W-IP20	L240*W120*H60mm					20PCS
HW-750W-IP20	L240*W120*H60mm					20PCS
HW-1000W-IP20	L240*W120*H60mm					20PCS